


## Professional Automotive Thin Film Chip Resistor

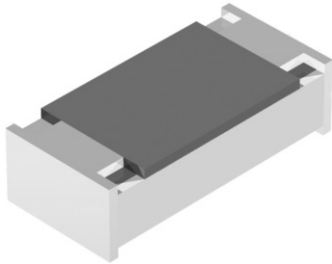

MCT 0603 AT Professional Thin Film Chip Resistors are the perfect choice for most fields of modern professional electronics where reliability and stability is of major concern. Typical applications include automotive, telecommunication, industrial, medical equipment, precision test and measuring equipment.

### FEATURES

- Operating temperature 175 °C, 1000 h
- Superior moisture resistivity < 0.5 % (85 °C; 85 % RH; 1000 h)
- Rated dissipation  $P_{85} = 150$  mW
- AEC-Q200 compliant
- Green product, supports lead (Pb)-free soldering, RoHS compliant



### APPLICATIONS

- Automotive
- Telecommunication
- Medical equipment
- Industrial equipment

### METRIC SIZE

|         |         |
|---------|---------|
| INCH:   | 0603    |
| METRIC: | RR1608M |

### TECHNICAL SPECIFICATIONS

| DESCRIPTION                            | MCT 0603 AT                 |
|----------------------------------------|-----------------------------|
| Metric size                            | RR1608M                     |
| Resistance range                       | 100 Ω to 100 kΩ             |
| Resistance tolerance                   | ± 1 %; ± 0.5 %              |
| Temperature coefficient                | ± 50 ppm/K; ± 25 ppm/K      |
| Rated dissipation $P_{85}^{(1)}$       | 0.150 W                     |
| Operating voltage, $U_{max}$ AC/DC     | 75 V                        |
| Permissible film temperature $(1)$     | 175 °C                      |
| Thermal resistance $(2)$               | ≤ 550 K/W                   |
| Insulation voltage                     |                             |
| 1 min; $U_{ins}$                       | 100 V                       |
| continuous                             | 75 V                        |
| Observed failure rate $FIT_{observed}$ | ≤ 0.1 x 10 <sup>-9</sup> /h |

#### Notes

(1) Please refer to APPLICATION INFORMATION below

(2) Measuring conditions in accordance with EN 140401-801



### APPLICATION INFORMATION

The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature is not exceeded.

These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime. At the maximum permissible film temperature of 175 °C the useful lifetime is specified for 1000 h. The designer may estimate the performance of the particular resistor application or set certain load and temperature limits in order to maintain a desired stability.

| MAXIMUM RESISTANCE CHANGE AT RATED POWER                 |                          |                            |                           |
|----------------------------------------------------------|--------------------------|----------------------------|---------------------------|
| DESCRIPTION                                              | MCT 0603 AT              |                            |                           |
| Metric size                                              | RR1608M                  |                            |                           |
| Operation mode                                           | Standard                 | Power                      | Advanced Temperature      |
| Rated power                                              | $P_{70} = 0.1 \text{ W}$ | $P_{70} = 0.125 \text{ W}$ | $P_{85} = 0.15 \text{ W}$ |
| Film temperature                                         | 125 °C                   | 155 °C                     | 175 °C                    |
| Max. resistance change at $P_{70}$ for resistance range: | 100 Ω to 100 kΩ          |                            |                           |
| $\Delta R/R$ max., after:                                |                          |                            |                           |
| 1000 h                                                   | ≤ 0.15 %                 | ≤ 0.25 %                   |                           |
| 8000 h                                                   | ≤ 0.25 %                 | ≤ 0.5 %                    |                           |
| 225 000 h                                                | ≤ 1.0 %                  | -                          |                           |
| Max. resistance change at $P_{85}$ for resistance range: |                          |                            | 100 Ω to 100 kΩ           |
| $\Delta R/R$ max., after:                                |                          |                            | ≤ 0.5 %                   |

| PART NUMBER AND PRODUCT DESCRIPTION (1)             |                        |                                                |                                                                                                                                                                                                |                                        |               |                                 |   |   |   |   |   |   |   |   |   |   |   |
|-----------------------------------------------------|------------------------|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|---------------|---------------------------------|---|---|---|---|---|---|---|---|---|---|---|
| PART NUMBER: MCT0603MD4641DPW00                     |                        |                                                |                                                                                                                                                                                                |                                        |               |                                 |   |   |   |   |   |   |   |   |   |   |   |
| M                                                   | C                      | T                                              | 0                                                                                                                                                                                              | 6                                      | 0             | 3                               | M | D | 4 | 6 | 4 | 1 | D | P | W | 0 | 0 |
| MODEL/SIZE                                          | SPECIAL CHARACTER      | TCR                                            | VALUE                                                                                                                                                                                          | TOLERANCE                              | PACKAGING (2) | SPECIAL                         |   |   |   |   |   |   |   |   |   |   |   |
| MCT0603                                             | M = AT<br>(Automotive) | D = ± 25 ppm/K<br>C = ± 50 ppm/K<br>Z = Jumper | 3 digit value<br>1 digit multiplier<br><br>MULTIPLIER<br>0 = *10 <sup>0</sup><br>1 = *10 <sup>1</sup><br>2 = *10 <sup>2</sup><br>3 = *10 <sup>3</sup><br>4 = *10 <sup>4</sup><br>0000 = Jumper | D = ± 0.5 %<br>F = ± 1 %<br>Z = Jumper | P5<br>PW      | up to 2 digits<br>00 = standard |   |   |   |   |   |   |   |   |   |   |   |
| PRODUCT DESCRIPTION: MCT 0603 - 25 0.5 % AT PW 4K64 |                        |                                                |                                                                                                                                                                                                |                                        |               |                                 |   |   |   |   |   |   |   |   |   |   |   |
| MCT                                                 | 0603                   | - 25                                           | 0.5 %                                                                                                                                                                                          | AT                                     | PW            | 4K64                            |   |   |   |   |   |   |   |   |   |   |   |
| MODEL                                               | SIZE                   | TCR                                            | TOLERANCE VALUE                                                                                                                                                                                | SPECIAL CHARACTER                      | PACKAGING (2) | RESISTANCE VALUE                |   |   |   |   |   |   |   |   |   |   |   |
| MCT                                                 | 0603                   | ± 25 ppm/K<br>± 50 ppm/K                       | ± 0.5 %<br>± 1 %                                                                                                                                                                               | AT = Automotive                        | P5<br>PW      | 47K = 47 kΩ<br>0R0 = Jumper     |   |   |   |   |   |   |   |   |   |   |   |

#### Notes


- (1) Products can be ordered using either the PART NUMBER and PRODUCT DESCRIPTION
- (2) Please refer to table PACKAGING below

# MCT 0603 AT - Professional

Vishay Beyschlag Professional Automotive Thin Film Chip Resistor



## DIMENSIONS

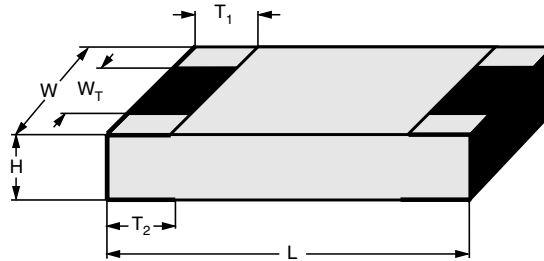

| DIMENSIONS - chip resistor types, mass and relevant physical dimensions |                   |             |            |                     |                     |                     |           |
|-------------------------------------------------------------------------|-------------------|-------------|------------|---------------------|---------------------|---------------------|-----------|
| TYPE                                                                    | H (mm)            | L (mm)      | W (mm)     | W <sub>T</sub> (mm) | T <sub>1</sub> (mm) | T <sub>2</sub> (mm) | MASS (mg) |
| MCT 0603 AT                                                             | 0.45 + 0.1/- 0.05 | 1.55 ± 0.05 | 0.85 ± 0.1 | > 75 % of W         | 0.3 + 0.15/- 0.2    | 0.3 + 0.15/- 0.2    | 1.9       |

| TEMPERATURE COEFFICIENT AND RESISTANCE RANGE |           |                                  |
|----------------------------------------------|-----------|----------------------------------|
| DESCRIPTION                                  |           | RESISTANCE VALUE <sup>(1)</sup>  |
| TCR                                          | TOLERANCE | <b>MCT 0603 AT</b>               |
| ± 50 ppm/K                                   | ± 1 %     | 100 Ω to 100 kΩ                  |
|                                              | ± 0.5 %   | 100 Ω to 100 kΩ                  |
| ± 25 ppm/K                                   | ± 0.5 %   | 100 Ω to 100 kΩ                  |
| Jumper                                       | -         | ≤ 20 mΩ; I <sub>max.</sub> = 1 A |

### Note

<sup>(1)</sup> Resistance values to be selected for ± 1 % tolerance from E24 and E96; for ± 0.5 % tolerance from E24 and E192

Resistance ranges printed in bold are preferred TCR/tolerance combinations with optimized availability.

| PACKAGING   |                               |      |
|-------------|-------------------------------|------|
| MODEL       | REEL                          |      |
|             | PIECES/<br>PAPER TAPE ON REEL | CODE |
| MCT 0603 AT | 5000                          | P5   |
|             | 20 000                        | PW   |



### DESCRIPTION

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade (96 % Al<sub>2</sub>O<sub>3</sub>) ceramic substrate and conditioned to achieve the desired temperature coefficient. Specially designed inner contacts are deposited on both sides. A special laser is used to achieve the target value by smoothly cutting a meander groove in the resistive layer without damaging the ceramics. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating.

The result of the determined production is verified by an extensive testing procedure and optical inspection performed on 100 % of the individual chip resistors. Only accepted products are laid directly into the paper tape in accordance with **EN 60286-3**.

### ASSEMBLY

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapour phase as shown in **IEC 61760-1\***. The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system. The resistors are RoHS compliant; the pure tin plating provides compatibility with lead (Pb)-free and lead-containing soldering processes. Solderability is specified for 2 years after production or requalification. The permitted storage time is 20 years. The immunity of the

plating against tin whisker growth has been proven under extensive testing.

All products comply with the **GADSL** <sup>(1)</sup> and the **CEFIC-EECA-EICTA** <sup>(2)</sup> list of legal restrictions on hazardous substances. This includes full compliance with the following directives:

- 2000/53/EC End of Vehicle life Directive (ELV) and Annex II (ELV II)
- 2002/95/EC Restriction of the use of Hazardous Substances directive (RoHS)
- 2002/96/EC Waste Electrical and Electronic Equipment Directive (WEEE)

### APPROVALS

The resistors are tested in accordance with **EN 140401-801** (superseding **CECC 40401-801**) which refers to **EN 60115-1** and **EN 140400**. The approval is valid with regards to rated power  $P_{70}$  and a temperature range of - 55 °C to 155 °C.

Approval of conformity is indicated by the CECC logo on the package label.

Vishay BEYSCHLAG has achieved “**Approval of Manufacturer**” in accordance with **EN 100114-1**. The release certificate for “**Technology Approval Schedule**” in accordance with **CECC 240 001** based on **EN 100114-6** is granted for the Vishay BEYSCHLAG manufacturing process.

### SPECIALS

This product family of thin film flat chip resistors is completed by **Zero Ohm Jumpers**.

### Notes

- The quoted IEC standards marked with an asterisk (\*) are also released as EN standards with the same number and identical contents

<sup>(1)</sup> Global Automotive Declarable Substance List, see [www.gadsl.org](http://www.gadsl.org)


<sup>(2)</sup> CEFIC (European Chemical Industry Council), EECA (European Electronic Component Manufacturers Association), EICTA (European trade organisation representing the information and communications technology and consumer electronics), see [www.eicta.org](http://www.eicta.org) → issue → environment policy → chemicals → chemicals for electronics

# MCT 0603 AT - Professional

Vishay Beyschlag Professional Automotive Thin Film Chip Resistor




## FUNCTIONAL PERFORMANCE

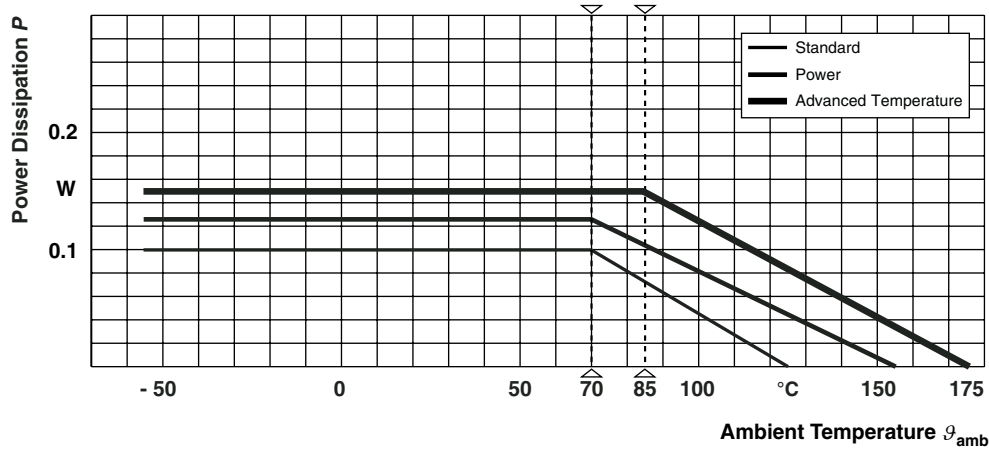


For permissible resistance change please refer to table MAXIMUM RESISTANCE CHANGE AT RATED POWER

### Derating

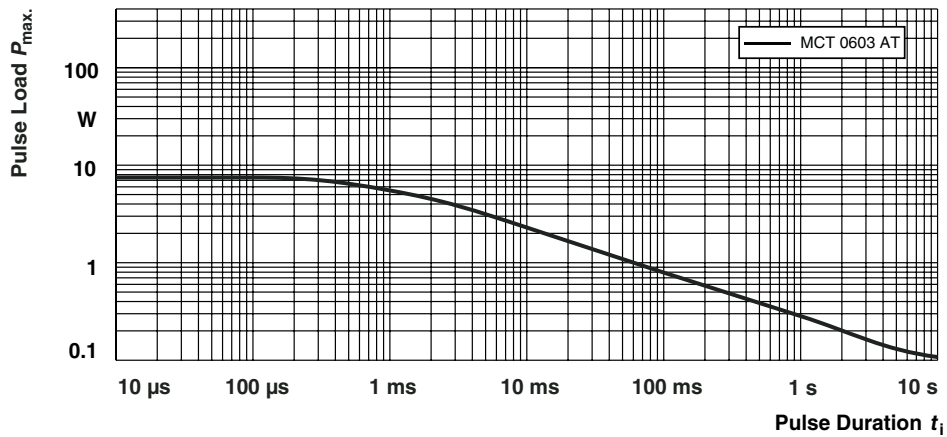

Maximum pulse load, single pulse; for permissible resistance change equivalent to 8000 h operation

### Single Pulse

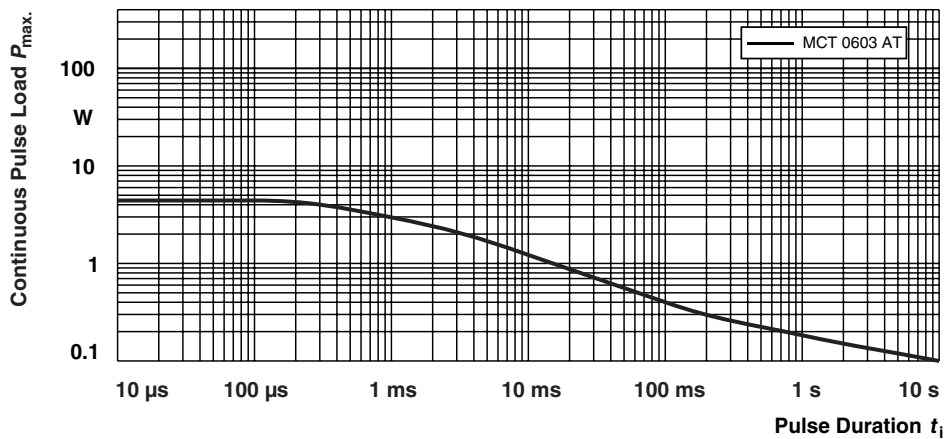


Maximum pulse load, continuous pulses; for permissible resistance change equivalent to 8000 h operation

### Continuous Pulse




# MCT 0603 AT - Professional

Professional Automotive Thin Film Chip Resistor Vishay Beyschlag

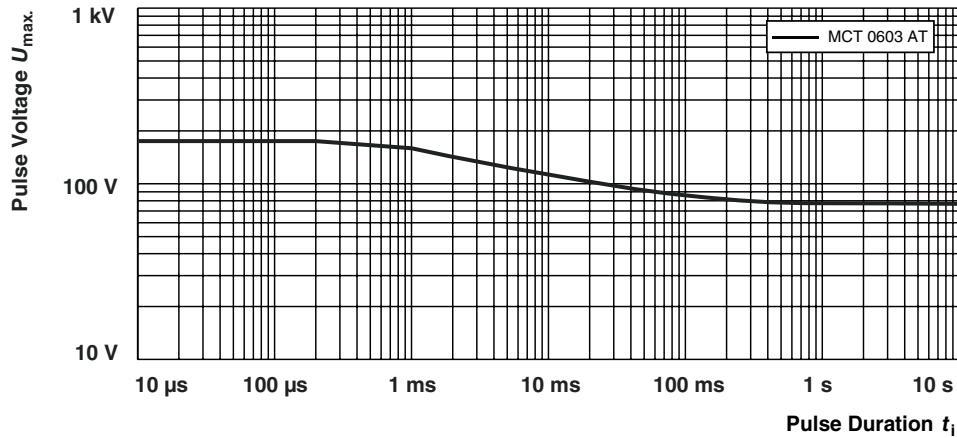


Maximum pulse voltage, single and continuous pulses; for permissible resistance change equivalent to 8000 h operation

## Pulse Voltage

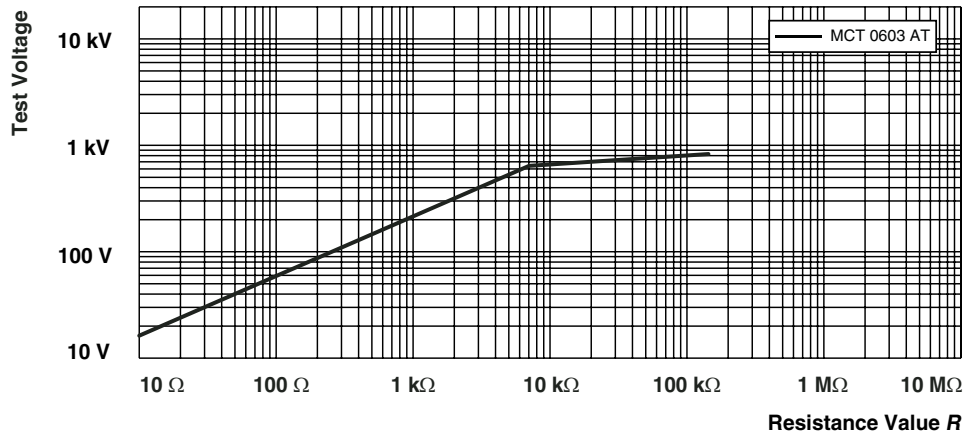


Pulse load rating in accordance with EN 60115-1 clause 4.27; 1.2  $\mu$ s/50  $\mu$ s; 5 pulses at 12 s interval; for permissible resistance change 0.5 %

## 1.2/50 Pulse

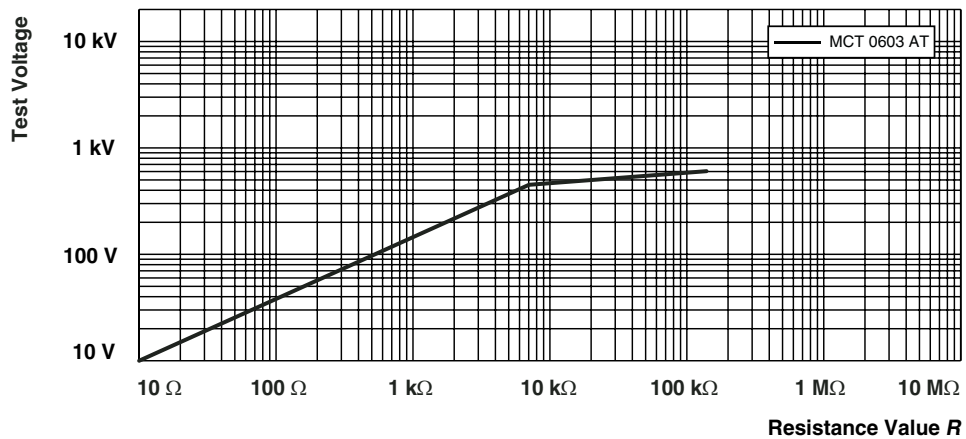


Pulse load rating in accordance with EN 60115-1 clause 4.27; 10  $\mu$ s/700  $\mu$ s; 10 pulses at 1 minute intervals; for permissible resistance change 0.5 %

## 10/700 Pulse

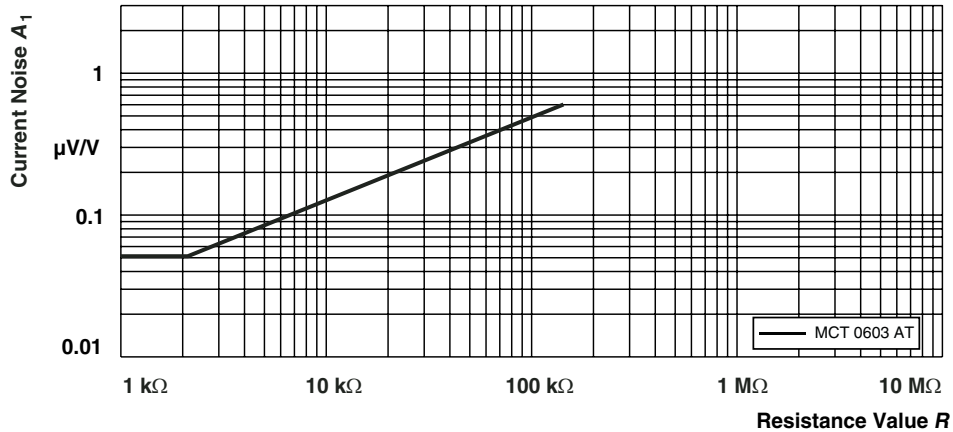

Current noise A<sub>1</sub> in accordance with IEC 60 195

### Current Noise

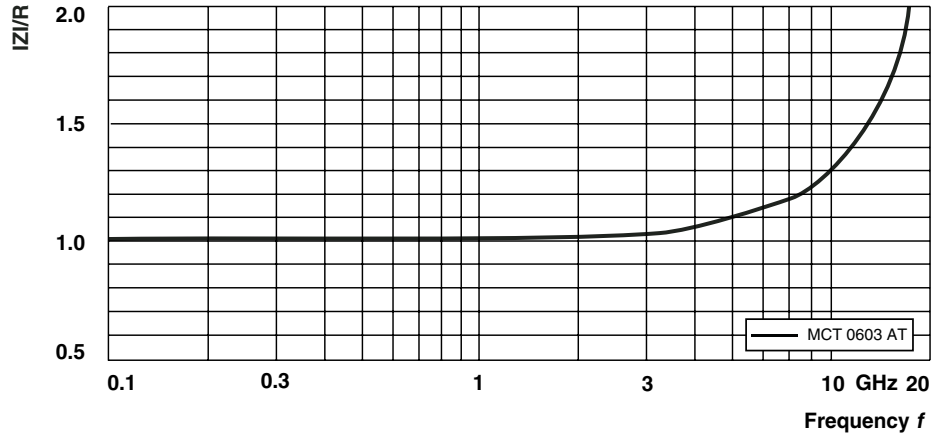

IZI/R for 49.9 Ω chip resistor

### RF-Behaviour

## TESTS AND REQUIREMENTS

All tests are carried out in accordance with the following specifications:

- EN 60115-1, Generic specification
- EN 140 400, Sectional specification
- EN 140 401-801, Detail specification

The components are approved in accordance with the European CECC-system, where applicable. The following table contains only the most important tests. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202.

The tests are carried out in accordance with IEC 60068 and under standard atmospheric conditions in accordance with IEC 60068-1, 5.3. Climatic category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper

Category Temperature; damp heat, long term, 56 days) is valid (LCT = - 55 °C/UCT = 155 °C).

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1 060 mbar).

The components are mounted for testing on boards in accordance with EN 60115-1, 4.31 unless otherwise specified.

The requirements stated in the Test Procedures and Requirements table are based on the required tests and permitted limits of EN 140 401-801. However, some additional tests and a number of improvements against those minimum requirements have been included.



| TEST PROCEDURES AND REQUIREMENTS |                                                       |                                                   |                                                                                                                                |                                                                                                  |
|----------------------------------|-------------------------------------------------------|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| EN<br>60115-1<br>CLAUSE          | IEC<br>60068-2<br>TEST<br>METHOD                      | TEST                                              | PROCEDURE                                                                                                                      | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R/R$ )                                              |
|                                  |                                                       |                                                   |                                                                                                                                | STABILITY CLASS 0.5                                                                              |
|                                  |                                                       |                                                   | Stability for product types:                                                                                                   |                                                                                                  |
|                                  |                                                       |                                                   | <b>MCT 0603 AT</b>                                                                                                             | 100 $\Omega$ to 100 k $\Omega$                                                                   |
| 4.5                              | -                                                     | Resistance                                        |                                                                                                                                | $\pm 1\%$ ; $\pm 0.5\%$                                                                          |
| 4.8.4.2                          | -                                                     | Temperature coefficient                           | At 20/- 55/20 °C and<br>20/155/20 °C                                                                                           | $\pm 50$ ppm/K; $\pm 25$ ppm/K                                                                   |
| 4.25.1                           | -                                                     | Endurance at<br>70 °C: standard<br>operation mode | $U = \sqrt{P_{70} \times R}$ or<br>$U = U_{max.}$ ;<br>whichever is the less severe;<br><br>70 °C; 1000 h<br><br>70 °C; 8000 h | $\pm (0.15\% R + 0.05 \Omega)$<br><br>$\pm (0.25\% R + 0.05 \Omega)$                             |
|                                  |                                                       | Endurance at<br>70 °C: power<br>operation mode    | $U = \sqrt{P_{70} \times R}$ or<br>$U = U_{max.}$ ;<br>whichever is the less severe;<br><br>70 °C; 1000 h<br><br>70 °C; 8000 h | $\pm (0.3\% R + 0.05 \Omega)$<br><br>$\pm (0.5\% R + 0.05 \Omega)$                               |
| 4.25.3                           | -                                                     | Endurance at<br>upper category<br>temperature     | 125 °C; 1000 h<br>155 °C; 1000 h<br>175 °C; 1000 h                                                                             | $\pm (0.15\% R + 0.05 \Omega)$<br>$\pm (0.3\% R + 0.05 \Omega)$<br>$\pm (0.5\% R + 0.05 \Omega)$ |
| 4.24                             | 78 (Cab)                                              | Damp heat,<br>steady state                        | $(40 \pm 2)$ °C; 56 days;<br>$(93 \pm 3)$ % RH<br>$U = 0.3 U_{rated}$                                                          | $\pm (0.1\% R + 0.05 \Omega)$                                                                    |
| 4.39                             | 67 (Cy)                                               | Damp heat,<br>steady state,<br>accelerated        | $(85 \pm 2)$ °C;<br>$(85 \pm 5)$ % RH<br>$U = 0.3 U_{rated}$<br>1000 h                                                         | $\pm (0.5\% R + 0.05 \Omega)$                                                                    |
| 4.23                             | 2 (Ba)<br>30 (Db)<br>1 (Aa)<br>13 (M)<br>30 (Db)<br>- | Climatic sequence:                                |                                                                                                                                | $\pm (0.5\% R + 0.05 \Omega)$                                                                    |
| 4.23.2                           |                                                       | dry heat                                          | 155 °C; 16 h                                                                                                                   |                                                                                                  |
| 4.23.3                           |                                                       | damp heat, cyclic                                 | 55 °C; 24 h; > 90 % RH;<br>1 cycle                                                                                             |                                                                                                  |
| 4.23.4                           |                                                       | cold                                              | - 55 °C; 2 h                                                                                                                   |                                                                                                  |
| 4.23.5                           |                                                       | low air pressure                                  | 8.5 kPa; 2 h; $25 \pm 10$ °C                                                                                                   |                                                                                                  |
| 4.23.6                           |                                                       | damp heat, cyclic                                 | 55 °C; 5 days > 90 % RH;<br>5 cycles                                                                                           |                                                                                                  |
| 4.23.7                           |                                                       | d.c. load                                         | $U = \sqrt{P_{70} \times R} \leq U_{max.}$ ; 1 min                                                                             |                                                                                                  |
| -                                | 1 (Aa)                                                | Storage at low<br>temperature                     | - 55 °C; 2 h                                                                                                                   | $\pm (0.1\% R + 0.01 \Omega)$                                                                    |
| 4.19                             | 14 (Na)                                               | Rapid change of<br>temperature                    | 30 min at - 55 °C and<br>30 min at 155 °C;<br>1000 cycles                                                                      | $\pm (0.5\% R + 0.01 \Omega)$                                                                    |





| TEST PROCEDURES AND REQUIREMENTS |                         |                                                             |                                                                                                                                   |                                                                                       |
|----------------------------------|-------------------------|-------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| EN 60115-1 CLAUSE                | IEC 60068-2 TEST METHOD | TEST                                                        | PROCEDURE                                                                                                                         | REQUIREMENTS PERMISSIBLE CHANGE ( $\Delta R/R$ )                                      |
|                                  |                         |                                                             |                                                                                                                                   | STABILITY CLASS 0.5                                                                   |
|                                  |                         |                                                             | Stability for product types:                                                                                                      |                                                                                       |
|                                  |                         |                                                             | <b>MCT 0603 AT</b>                                                                                                                | 100 $\Omega$ to 100 k $\Omega$                                                        |
| 4.13                             | -                       | Short time overload; standard operation mode                | $U = 2.5 \times \sqrt{P_{70} \times R}$<br>$\leq 2 \times U_{max.}; 5 \text{ s}$                                                  | $\pm (0.1 \% R + 0.01 \Omega)$                                                        |
|                                  |                         | Short time overload; power operation mode                   |                                                                                                                                   | $\pm (0.25 \% R + 0.05 \Omega)$                                                       |
| 4.27                             | -                       | Single pulse high voltage overload; standard operation mode | Severity no. 4:<br>$U = 10 \times \sqrt{P_{70} \times R}$<br>$\leq 2 \times U_{max.};$<br>10 pulses                               | $\pm (0.25 \% R + 0.05 \Omega)$                                                       |
|                                  |                         | Single pulse high voltage overload; power operation mode    |                                                                                                                                   | $\pm (0.5 \% R + 0.05 \Omega)$                                                        |
| 4.37                             | -                       | Periodic electric overload; standard operation mode         | $U = \sqrt{15 \times P_{70} \times R}$<br>$\leq 2 \times U_{max.};$<br>0.1 s ON; 2.5 s OFF;<br>1000 cycles                        | $\pm (0.5 \% R + 0.05 \Omega)$                                                        |
|                                  |                         | Periodic electric overload; power operation mode            |                                                                                                                                   | $\pm (1.0 \% R + 0.05 \Omega)$                                                        |
| -                                | -                       | ESD (Electro Static Discharge)                              | MIL-STD-883, Method 3015;<br>1000 V                                                                                               | $\pm (0.5 \% R + 0.05 \Omega)$                                                        |
| 4.22                             | 6 (Fc)                  | Vibration                                                   | Endurance by sweeping;<br>10 to 2000 Hz;<br>no resonance;<br>amplitude $\leq 1.5 \text{ mm}$ or<br>$\leq 200 \text{ m/s}^2$ ; 6 h | $\pm (0.1 \% R + 0.01 \Omega)$<br>no visible damage                                   |
| 4.17.2                           | 58 (Td)                 | Solderability                                               | Solder bath method;<br>SnPb40; non-activated flux<br>(215 $\pm$ 3) $^{\circ}\text{C}$ ; (3 $\pm$ 0.3) s                           | Good tinning ( $\geq 95 \%$ covered);<br>no visible damage                            |
|                                  |                         |                                                             | Solder bath method;<br>SnAg3Cu0.5 or SnAg3.5;<br>non-activated flux;<br>(245 $\pm$ 3) $^{\circ}\text{C}$ ; (3 $\pm$ 0.2) s        | Good tinning ( $\geq 95 \%$ covered);<br>no visible damage                            |
| 4.18.2                           | 58 (Td)                 | Resistance to soldering heat                                | Solder bath method;<br>(260 $\pm$ 5) $^{\circ}\text{C}$ ; (10 $\pm$ 1) s                                                          | $\pm (0.1 \% R + 0.01 \Omega)$<br>no visible damage                                   |
| 4.29                             | 45 (XA)                 | Component solvent resistance                                | Isopropyl alcohol + 50 $^{\circ}\text{C}$ ;<br>method 2                                                                           | No visible damage                                                                     |
| 4.32                             | 21 (Ue <sub>3</sub> )   | Shear (adhesion)                                            | RR 1608M; 9 N                                                                                                                     | No visible damage                                                                     |
| 4.33                             | 21 (Ue <sub>1</sub> )   | Substrate bending                                           | Depth 2 mm, 3 times                                                                                                               | $\pm (0.1 \% R + 0.01 \Omega)$<br>no visible damage; no open circuit in bent position |
| 4.7                              | -                       | Voltage proof                                               | $U_{rms} = U_{ins.}; 60 \pm 5 \text{ s}$                                                                                          | No flashover or breakdown                                                             |
| 4.35                             | -                       | Flammability                                                | Needle flame test; 10 s                                                                                                           | No burning after 30 s                                                                 |



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.