

TYPE NUMBER	MFR	APP	CMP	GBP MIN	SLEW RATE MIN	V _{S+} MAX	V _{S-} MAX	T _{OP} MAX	A _{VOL} MIN	V _{IO} MAX	I _B MAX	I _{IO} MAX	P _{ROT} MAX	I _{OUT} MIN	V _{OUT} MIN	V _{ICM} MAX	V _{IDF} MAX	dV _{IO} /dT MAX	P _O MAX	I _O MAX	CM RR MIN	PS RR MIN	R _{IN} MIN
MC1711L	MTU	DCP	EXT			+14V	-7V	125C	58dB	3.5MV	75uA	10uA	625MWF	5MA	2.5V	7V	5V	20uV/C	200MW				
MC1712CF	MTU	GPU	EXT	3MHZ		+13V	-8V	75C	66dB	5MV	7.5uA	2uA	500MWF	3MA	5V	1.5V	5V	20uV/C	120MW	7MA	70dB	70dB	10K
MC1712CG	MTU	GPU	EXT	3MHZ		+13V	-8V	75C	66dB	5MV	7.5uA	2uA	680MWF	3MA	5V	1.5V	5V	20uV/C	120MW	7MA	70dB	70dB	10K
MC1712CL	MTU	GPU	EXT	3MHZ		+13V	-8V	75C	66dB	5MV	7.5uA	2uA	625MWF	3MA	5V	1.5V	5V	20uV/C	120MW	7MA	70dB	70dB	10K
MC1712CP	MTU	GPU	EXT	3MHZ		+13V	-8V	75C	66dB	5MV	7.5uA	2uA	400MWF	3MA	5V	1.5V	5V	20uV/C	120MW	7MA	70dB	70dB	10K
MC1712F	MTU	GPU	EXT	3MHZ		+13V	-8V	125C	68dB	2MV	5uA	0.5uA	500MWF	3MA	5V	1.5V	5V	10uV/C	120MW	7MA	80dB	74dB	16K
MC1712G	MTU	GPU	EXT	3MHZ		+13V	-8V	125C	68dB	2MV	5uA	0.5uA	680MWF	3MA	5V	1.5V	5V	10uV/C	120MW	7MA	80dB	74dB	16K
MC1712L	MTU	GPU	EXT	3MHZ		+13V	-8V	125C	68dB	2MV	5uA	0.5uA	625MWF	3MA	5V	1.5V	5V	10uV/C	120MW	7MA	80dB	74dB	16K
MC1733CG	MTU	BDO	INT	40MHZ		+8V	-8V	70C	40dB	6MV	30uA	5uA	500MWF	2MA	2V	6V	5V			24MA	60dB	50dB	2K
MC1733CL	MTU	BDO	INT	40MHZ		+8V	-8V	70C	40dB	6MV	30uA	5uA	500MWF	2MA	2V	6V	5V			24MA	60dB	50dB	2K
MC1733CP	MTU	BDO	INT	40MHZ		+8V	-8V	70C	40dB	6MV	30uA	5uA	500MWF	2MA	2V	6V	5V			24MA	60dB	50dB	2K
MC1733G	MTU	BDO	INT	40MHZ		+8V	-8V	125C	50dB	5MV	20uA	3uA	500MWF	2MA	2V	6V	5V			24MA	60dB	50dB	2K
MC1733L	MTU	BDO	INT	40MHZ		+8V	-8V	125C	50dB	5MV	20uA	3uA	500MWF	2MA	2V	6V	5V			24MA	60dB	50dB	2K
MC1741CF	MTU	GPK	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	500MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741CG	MTU	GPK	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	680MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741CL	MTU	GPK	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	750MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741CP1	MTU	GPK	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	625MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741CP2	MTU	GPK	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	625MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741CU	MTU	GPK	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	750MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741F	MTU	GPK	INT		0.3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	500MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741G	MTU	GPK	INT		0.3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	680MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741L	MTU	GPK	INT		0.3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	750MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741NCF	MTU	GPK	INT		3V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	500MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741NCU	MTU	LNA	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	680MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741NCL	MTU	LNA	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	750MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741NCP	MTU	LNA	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	625MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741NCP1	MTU	LNA	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	625MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741NCP2	MTU	LNA	INT		0.2V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	750MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741NCU	MTU	LNA	INT		0.3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	500MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741NG	MTU	LNA	INT		0.3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	680MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741NL	MTU	LNA	INT		0.3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	750MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741NU	MTU	LNA	INT		0.3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	625MWF	5MA	5MV	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741SCG	MTU	HSR	INT		3V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	680MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741SCL	MTU	HSR	INT		3V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	750MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741SCP	MTU	HSR	INT		3V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	625MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741SCP1	MTU	HSR	INT		3V/uS	+18V	-18V	70C	86dB	6MV	500NA	200NA	625MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741SCU	MTU	HSR	INT		3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	750MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1741SG	MTU	HSR	INT		3V/uS	+18V	-18V	125C	94dB	5MV	500NA	200NA	680MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741SL	MTU	HSR	INT		3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	750MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741SU	MTU	HSR	INT		3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	625MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1741U	MTU	GPK	INT		0.3V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	625MWF	5MA	12V	15V	30V		75MW	3MA	70dB	76dB	300K
MC1747CF	MTU	DGK	INT		0.2V/uS	+18V	-18V	75C	88dB	6MV	500NA	200NA	750MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1747CG	MTU	DGU	INT		0.2V/uS	+18V	-18V	75C	88dB	6MV	500NA	200NA	500MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1747CL	MTU	DGU	INT		0.2V/uS	+18V	-18V	75C	88dB	6MV	500NA	200NA	670MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1747CP	MTU	DGU	INT		0.2V/uS	+18V	-18V	75C	88dB	6MV	500NA	200NA	670MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1747F	MTU	DGK	INT		0.2V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	750MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1747G	MTU	DGK	INT		0.2V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	500MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1747L	MTU	DGK	INT		0.2V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	670MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1748CG	MTU	GPU	EXT		.25V/uS	+22V	-22V	75C	94dB	5MV	500NA	200NA	680MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1748CP1	MTU	GPU	EXT		.25V/uS	+18V	-18V	75C	86dB	6MV	500NA	200NA	300MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1748CU	MTU	GPU	EXT		.25V/uS	+18V	-18V	75C	86dB	6MV	500NA	200NA	300MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1748G	MTU	GPU	EXT		.25V/uS	+22V	-22V	125C	94dB	5MV	500NA	200NA	680MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1748U	MTU	GPU	EXT		.25V/uS	+18V	-18V	125C	86dB	6MV	500NA	200NA	310MWF	5MA	12V	15V	30V		85MW	3MA	70dB	76dB	300K
MC1776CG	MTU	PRA	INT		0.3V/uS	+18V	-18V	70C	94dB	6MV	50NA	25NA	680MWF	2MA	10V	15V	30V		6MW	2UA	70dB	74dB	2M
MC1776G	MTU	PRA	INT		0.3V/uS	+18V	-18V	125C	100dB	5MV	50NA	15NA	680MWF	2MA	10V	15V	30V		6MW	2UA	70dB	76dB	2M
MC1776L	MTU	PRA	INT		0.3V/uS	+18V	-18V	125C	100dB	5MV	50NA	15NA	670MWF	2MA	10V	15V	30V		6MW	2UA	70dB	76dB	2M
MC3301P	MTU	QCD	INT	1MSHZ	0.2V/uS	+28V		85C	60dB		300NA		625MWF	6MA	13V					10MA		50dB	
MC3302A	MUG	QCP	EXT		20V/uS	+14V	-14V	85C	66dB	20MV	500NA	100NA	900MWF	2MA		9V	28V			2MA			
MC3302L	MTU	QCP	EXT		20V/uS	+14V	-14V	85C	66dB	20MV	500NA	100NA	900MWF	2MA		9V	28V			2MA			
MC3302N(14)	MUG	QCP	EXT		20V/uS	+14V	-14V	85C	66dB	20MV	500NA	100NA	900MWF	2MA		9V	28V			2MA			

For detailed explanations of column heading notations, see App. A.

Also for ready references the more important abbreviations used in the column headings are listed below:

LEFT HAND PAGE

APP = application

(codes at APP.E.)

CMRR = common mode rejection ratio

CMP = compensation (frequency)

dV_{in}/dT = input offset voltage temperature drift

GBP = gain bandwidth product

I_{b1} = input bias current

I_{b0} = input bias offset current

I_{q1} = quiescent supply current

MFR = manufacturer (codes at App.C.)

P_{q1} = quiescent power consumer

PSRR = power supply rejection ratio

V_{ICM} = common mode input voltage rating

V_{ICR} = differential input voltage rating

V_{IO} = input offset voltage

V_S = dc supply voltage

RIGHT HAND PAGE

Lead out coding summary (details at APP.G.) for different cases (APP.F.)

A = gain adjust

B = bias adjust

C = case

E- = inverting input

E+ = non-inverting input

F,F* = input frequency compensation

G = ground

J = high level input

K = output, open collector

L = output, open emitter

M = metal case

N = not connected

Q = special terminal

R,R* = outputs

S = strobe

T,T* = offset balance

V+ = +ve dc supply

V- = -ve dc supply

W = guard ring

X = blank position, no lead

++ = +ve supplementary dc supply

-- = -ve supplementary dc supply

ϕ,ϕ^* = output frequency compensation

	CASE (APP.F.)	LD 1	LD 2	LD 3	LD 4	LD 5	LD 6	LD 7	LD 8	LD 9	LD 10	LD 11	LD 12	LD 13	LD 14	LD 15	LD 16	EUROPE SUBSTITUTE	USA SUBSTITUTE	ISS	TYPE NUMBER
	DIL-14/1C	N	E-1	E+1	V-	E+2	E-2	N	N	S2	R	V+	G	S1	N			SFC2711KM	UA711DM	0	MC1711L
	FLP-10/3C	N	G	E-	E+	V-	F	\emptyset	R	N	V+							SN52702FA	UA702FM	0	MC1712CF
	T05-8/1M	G	E-	E+	V-M	F	\emptyset	R	V+									SN72702L	UA702HC	0	MC1712CG
	DIL-14/1C	N	N	G	E-	E+	V-	N	N	F	\emptyset	R	N	V+	N			SN72702J	UA702DC	0	MC1712CL
	DIL-14/1P	N	N	G	E-	E+	V-	N	N	F	\emptyset	R	N	V+	N			SN72702J	UA702DC	0	MC1712CP
	FLP-10/3C	N	G	E-	E+	V-	F	\emptyset	R	N	V+							SN52702FA	UA702FM	0	MC1712F
	T05-8/1M	G	E-	E+	V-M	F	\emptyset	R	V+									SN52702AL	UA702HM	0	MC1712G
	DIL-14/1C	N	N	G	E-	E+	V-	N	N	F	\emptyset	R	N	V+	N			SN52702J	UA702DM	0	MC1712L
	T05-10/1M	E-	E+	A2	A*2	V-	R	R*	V+	A1	A*1							SN72733L	UA733HC	0	MC1733CG
	DIL-14/1C	E+	N	A2	A*2	V-	N	R	R*	N	V+	A1	A*1	N	E-			SN72733J	UA733DC	0	MC1733CL
	DIL-14/1P	E+	N	A2	A*2	V-	N	R	R*	N	V+	A1	A*1	N	E-			SN72733J	UA733DC	0	MC1733CP
	T05-10/1M	E-	E+	A2	A*2	V-	R	R*	V+	A1	A*1							SN52733L	UA733HM	0	MC1733G
	DIL-14/1C	E+	N	A2	A*2	V-	N	R	R*	N	V+	A1	A*1	N	E-			SN52733J	UA733DM	0	MC1733L
	FLP-10/3C	N	T	E-	E+	V-	T*	R	V+	N	N							LM741F	UA741FM	0	MC1741CF
	T05-8/1M	T	E-	E+	V-M	T*	R	V+	N									TBA221	UA741HC	0	MC1741CG
	DIL-14/1C	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			TBA221A	UA741DC	0	MC1741CL
	DIL-8/1P	T	E-	E+	V-	T*	V+	N	N									TBA221B	UA741TC	0	MC1741CP1
	DIL-14/1P	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			TBA221A	UA741DC	0	MC1741CP2
	DIL-8/1C	T	E-	E+	V-	T*	V+	N	N									TBA221B	UA741TC	0	MC1741CU
	FLP-10/3C	N	T	E-	E+	V-	T*	R	V+	N	N							LM741F	UA741FM	0	MC1741F
	T05-8/1M	T	E-	E+	V-M	T*	R	V+	N									TBA222	UA741HM	0	MC1741G
	DIL-14/1C	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			LM741D	UA741DM	0	MC1741L
	FLP-10/3C	N	T	E-	E+	V-	T*	R	V+	N	N							741LNFB	741LNFB	0	MC1741NCF
	T05-8/1M	T	E-	E+	V-M	T*	R	V+	N									741CLNTY	741CLNTY	0	MC1741NCG
	DIL-14/1C	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			741LNDD	741LNDD	0	MC1741NCL
	DIL-14/1P	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			741LNDD	741LNDD	0	MC1741NCP
	DIL-8/1P	T	E-	E+	V-	T*	V+	N	N									741CLNPA	741CLNPA	0	MC1741NCP1
	DIL-8/1C	T	E-	E+	V-	T*	V+	N	N									741CLNPA	741CLNPA	0	MC1741NCU
	FLP-10/3C	N	T	E-	E+	V-	T*	R	V+	N	N							741LNFB	741LNFB	0	MC1741NFB
	T05-8/1M	T	E-	E+	V-M	T*	R	V+	N									741MLNTY	741MLNTY	0	MC1741NG
	DIL-14/1C	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			741LNDD	741LNDD	0	MC1741NL
	DIL-8/1C	T	E-	E+	V-	T*	V+	N	N									741LNDD	741LNDD	0	MC1741NU
	T05-8/1M	T	E-	E+	V-M	T*	R	V+	N									741CHS	741CHS	0	MC1741SCG
	DIL-14/1C	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			741MHSDD	741MHSDD	0	MC1741SCL
	DIL-14/1P	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			741MHSDD	741MHSDD	0	MC1741SCP
	DIL-8/1P	T	E-	E+	V-	T*	V+	N	N									741CHSPA	741CHSPA	0	MC1741SCP1
	DIL-8/1C	T	E-	E+	V-	T*	V+	N	N									741CHSPA	741CHSPA	0	MC1741SCU
	T05-8/1M	T	E-	E+	V-M	T*	R	V+	N									741MHSSTY	741MHSSTY	0	MC1741SG
	DIL-14/1C	N	N	T	E-	E+	V-	N	N	T*	R	V+	N	N	N			741MHSDD	741MHSDD	0	MC1741SL
	DIL-8/1C	T	E-	E+	V-	T*	V+	N	N											0	MC1741SU
	DIL-8/1C	T	E-	E+	V-	T*	V+	N	N											0	MC1741U
	FLP-14/3C	E-1	E+1	T1	V-	T2	E+2	E-2	T*2	V+2	R2	N	R1	V+1	T*1			LM747CF	LM747CF	0	MC1747CF
	T05-10/1M	R1	V+1	E-1	E+1	V-	E+2	E-2	V+2	R2	N							TBB0747	UA747HC	0	MC1747CG
	DIL-14/1C	E-1	E+1	T1	V-	T2	E+2	E-2	T*2	V+2	R2	N	R1	V+1	T*1			TBB0747A	UA747DC	0	MC1747CL
	DIL-14/1P	E-1	E+1	T1	V-	T2	E+2	E-2	T*2	V+2	R2	N	R1	V+1	T*1			TBB0747A	UA747DC	0	MC1747CP
	FLP-14/3C	E-1	E+1	T1	V-	T2	E+2	E-2	T*2	V+2	R2	N	R1	V+1	T*1			LM747F	LM747F	0	MC1747F
	T05-10/1M	R1	V+1	E-1	E+1	V-	E+2	E-2	V+2	R2	N							SFC2747M	UA747HM	0	MC1747G
	DIL-14/1C	E-1	E+1	T1	V-	T2	E+2	E-2	T*2	V+2	R2	N	R1	V+1	T*1			SFC2747KM	UA747DM	0	MC1747L
	T05-8/1M	FT	E-	E+	V-M	T*	R	V+	F*									TBB0748	UA748HC	0	MC1748CG
	DIL-8/1P	FT	E-	E+	V-	T*	R	V+	F*									TBB0748B	UA748TC	0	MC1748CP1
	DIL-8/1C	FT	E-	E+	V-	T*	R	V+	F*									TBB0748B	UA748TC	0	MC1748CU
	T05-8/1M	FT	E-	E+	V-M	T*	R	V+	F*									TBC0748	UA748HM	0	MC1748G
	DIL-8/1C	FT	E-	E+	V-	T*	R	V+	F*									SN52748JP	LM748J	0	MC1748U
	T05-8/1M	T	E-	E+	V-	T*	R	V+	B										UA776HC	0	MC1776CG
	T05-8/1M	T	E-	E+	V-	T*	R	V+	B										UA776HM	0	MC1776G
	DIL-14/1C	N	N	T	E-	E+	V-	N	N	T*	R	V+	B	N	N				UA776DM	0	MC1776L
	DIL-14/1P	E+1	E+2	E-2	R2	R1	E-1	G	E-3	R3	R4	E-4	E+4	E+3	V+			UA3301P	LM3301N	0	MC3301P
	DIL-14/1P	R2	R1	V+	E-1	E+1	E-2	E+2	E+3	E-3	E-4	E+4	G	R4	R3			MC3302L	LM3302J	0	MC3302A
	DIL-14/1C	R2	R1	V+	E-1	E+1	E-2	E+2	E+3	E-3	E-4	E+4	G	R4	R3			MC3302L	LM3302J	0	MC3302L
	DIL-14/1P	R2	R1	V+	E-1	E+1	E-2	E+2	E+3	E-3	E-4	E+4	G	R4	R3			MC3302L	LM3302J	0	MC3302N(14)

Appendix A

Explanatory notes to tabulations

The general layout plan of the information in the tables of this compendium should be immediately evident from the data tabulation explanatory chart set out overleaf.

Supporting Appendices with additional information are:

- App. B Glossary of *Opamp Terms*
- App. C Tabulation *Codes for Manufacturers*
- App. D IC Manufacturers' *House Numbers*
- App. E Tabulation *Codes for Applications*
- App. F *Case Outline and Leadout Diagrams*
- App. G Codes for *Leadout Connections*

Unit symbols used in the tables are:

- A = amperes
- C = °centigrade
- dB = decibels
- G = gigaohms (megohms $\times 10^3$)
- GHZ = gigahertz (megahertz $\times 10^3$)
- K = kilohms
- KHZ = kilohertz
- M = megohms
- MA = milliamperes, mA
- MAX = maximum
- MHZ = megahertz
- MIN = minimum
- MV = millivolts
- MWC = milliwatts, case at 25C
- MWF = milliwatts, free air at 25C
- MWH = milliwatts, heat sink, 25C
- NA = nanoamps (microamps $\times 10^{-3}$)
- NV = nanovolts (microvolts $\times 10^{-3}$)
- PA = picoamps (microamps $\times 10^{-12}$)
- R = ohms
- T = teraohms (megohms $\times 10^6$)
- V = volts
- WC = watts, case at 25C
- WF = watts, free air at 25C
- WH = watts, heatsink, 25C
- μ A = microamps
- μ S = microseconds
- μ V = microvolts
- μ W = microwatts
- μ WF = microwatts, free air at 25C

Where a unit symbol appears in the middle of a value, it indicates the position of the decimal point, e.g. 3K3 = 3.3K.

Appendix A

TYPE NUMBER	MFR	APP	CMP	GBP MIN	SLEW RATE MIN	V _S ⁺ MAX	V _S ⁻ MAX	T _{OP} MAX	A _{VOL} MIN	V _{IO} MAX	I _B MAX	I _{IO} MAX	P _{TOT} MAX	I _{OUT} MIN	V _{OUT} MIN	V _{ICM} MAX	V _{IDF} MAX	dV _{IO} /dT MAX	P _O MAX	I _O MAX	CMRR MIN	PSRR MIN	R _{IN} MIN
(EXAMPLE) LH0022CH	NAU	FET	INT	.3MHZ	1V/US	+22V	-22V	85C	97dB	6MV	25pA	5pA	500MWF	10MA	10V	15V	30V	15uV/C	85MW	3MA	70dB	70dB	0.1T
<p>TYPE No. NUMERO-ALPHABETIC LISTING</p> <p>MFR = MANUFACTURER CODED AS APP. C</p> <p>APP = APPLICATION CODED AS APP. E</p> <p>CMP = FREQUENCY COMPENSATION WITH INT = INTERNAL EXT = EXTERNAL</p> <p>GBP MIN = UNITY GAIN BANDWIDTH PRODUCT, MIN; IN KHZ, MHZ, or GHZ</p> <p>SLEW RATE, MIN. IN VOLTS PER MICROSECOND. V/μS</p> <p>V_S⁺ MAX = MAX. PERMISSIBLE +VE DC SUPPLY VOLTAGE IN VOLTS, V</p> <p>V_S⁻ MAX = MAX. PERMISSIBLE -VE DC SUPPLY VOLTAGE IN VOLTS, V</p> <p>T_{OP} MAX = MAX. PERMISSIBLE OPERATIONAL AMBIENT TEMPERATURE IN °C.</p> <p>A_{VOL} MIN = MIN. OPEN-LOOP VOLTAGE GAIN IN DB</p> <p>V_{IO} MAX = MAX INPUT OFFSET VOLTAGE AT 25°C IN MV or μV.</p> <p>I_B MAX = MAX. INPUT BIAS CURRENT AT 25°C IN MA, μA, nA or pA</p> <p>P_{TOT} MAX = MAX. PERMISSIBLE POWER DISSIPATION IN W, mW, μW WITH F = FREE AIR 25°C, C = CASE 25°C, H = HEATSINK 25°C.</p> <p>I_{IO} MAX = MAX. INPUT OFFSET CURRENT AT 25°C IN MA, μA, nA, OR pA</p> <p>I_O MAX = MAX. QUIESCENT (NO SIGNAL, NO LOAD) CURRENT CONSUMPTION IN MA</p> <p>P_O MAX = MAX. QUIESCENT (NO SIGNAL, NO LOAD) POWER CONSUMPTION IN MW</p> <p>dV_{IO}/dT MAX = MAX. INPUT OFFSET VOLTAGE TEMPERATURE DRIFT IN μV/C OR MV/C</p> <p>V_{IDF} MAX = MAX. PERMISSIBLE DIFFERENTIAL INPUT VOLTAGE IN V.</p> <p>V_{ICM} MAX = MAX. PERMISSIBLE COMMON-MODE INPUT VOLTAGE IN VOLTS, V</p> <p>V_{OUT} MIN = GUARANTEED MIN. OUTPUT VOLTAGE, PEAK VALUE, IN VOLTS, V</p> <p>I_{OUT} MIN = GUARANTEED MINIMUM OUTPUT CURRENT, PEAK VALUE, IN MA OR μA.</p> <p>R_{IN} MIN = MIN. INPUT RESISTANCE</p> <p>PSRR MIN = MIN. POWER SUPPLY REJECTION RATIO IN DB</p> <p>CMRR MIN = MIN. COMMON MODE REJECTION RATIO IN DB</p>																							
<p>(NOTE: FOR FURTHER EXPLANATION OF SPECIAL TERMS SEE APP. B)</p>												<p>* R_{IN} EXPRESSED AS OHMS (R), KILOHMS (K), MEGOHMS (M), GIGAOHMS (G) OR TERAHMS (T)</p>											

Appendix A

LEFT HAND PAGE

For detailed explanations of column heading notations, see App. A.

Also for ready references the more important abbreviations used in the column headings are listed below:

- APP = application
(codes at APP.E.)
- CMRR = common mode rejection ratio
- CMP = compensation
(frequency)
- dV_{io}/dT = input offset voltage temperature drift
- GBP = gain bandwidth product
- I_B = input bias current
- I_{IO} = input bias offset current
- I_Q = quiescent supply current
- MFR = manufacturer
(codes at App.C.)
- P_Q = quiescent power consumer
- PSRR = power supply rejection ratio
- V_{icm} = common mode input voltage rating
- V_{idc} = differential input voltage rating
- V_{io} = input offset voltage
- V_S = dc supply voltage

RIGHT HAND PAGE

Lead out coding summary (details at APP.G.) for different cases (APP.F.)

- A = gain adjust
- B = bias adjust
- C = case
- E- = inverting input
- E+ = non-inverting input
- F,F* = input frequency compensation
- G = ground
- J = high level input
- K = output, open collector
- L = output, open emitter
- M = metal case
- N = not connected
- Q = special terminal
- R,R* = outputs
- S = strobe
- T,T* = offset balance
- V+ = +ve dc supply
- V- = -ve dc supply
- W = guard ring
- X = blank position, no lead
- + + = +ve supplementary dc supply
- - = -ve supplementary dc supply
- ϕ, ϕ^* = output frequency compensation

CASE (APP. F.)	LD 1	LD 2	LD 3	LD 4	LD 5	LD 6	LD 7	LD 8	LD 9	LD 10	LD 11	LD 12	LD 13	LD 14	LD 15	LD 16	EUROPE SUBSTITUTION	USA SUBSTITUTION	ISS	TYPE NUMBER	
T05-8/1M	T	E-	E+	V-	T*	R	V+	N	LH0022H	0	LH0022CH

CASE = PACKAGE OF DIFFERENT TYPES CODED ACCORDING TO APP. F - FIRST NUMBER INDICATES NUMBER OF LEAD POSITIONS EG DIL-14 = 14 LEAD DUAL-IN-LINE PACKAGE

LD1, LD2, ETC = LEAD NUMBERS WITH CONNECTIONS ACCORDING TO PAGE FOOTNOTE OR APP. G.

EURO SUBSTITUTION = PROELECTRON STANDARD OR OTHER TYPE AVAILABLE IN EUROPE

USA SUBSTITUTION = SUGGESTED ALTERNATIVE AVAILABLE IN USA.

ISS = ISSUE NUMBER OF DATA ENTRY

TYPE No. REPEATED ON R.H. MARGIN

Appendix C

Tabulation Codes for Manufacturers

ADU	Advanced Micro Devices Inc., 901 Thompson Pl., Sunnyvale, CA 94086, USA	ITU	DA14 5HT, UK ITT Semiconductors 74 Commerce Way, Woburn, MA, 01801, USA
ANG	Analog Devices Ltd, Central Ave., East Molesey, KT8 9BR, Surrey, UK	MNG	Mitsubishi Shoji Kaisha Ltd, Bow Bells House, Bread St., London, EC4, UK
ANU	Analog Devices Inc., P.O. Box 280, Norwood, Mass., 02062	MNJ	Mitsubishi Electric Corp., 2-12 Marunouchi, Chiyoda-ku, Tokyo, Japan
BLG	Bell & Howell Ltd, Lennox Road, Basingstoke, Hants, UK	MTG	Motorola Ltd (Semiconductor Products Div.), York House, Empire Way, Wembley, Middlesex, HA9 0PR, UK
BLU	Bell & Howell (Control Products Divison), 706 Bostwick Ave, Bridgeport, Conn. 06605, USA	MTU	Motorola Semiconductor Products Inc., 5005 E. McDowell Road, Phoenix, AZ, 85008, USA
BUG	Burr-Brown International Ltd, 17 Exchange Rd, Watford, WQD1 7EB, Herts., UK	MUG	Mullard Ltd, Mullard House, Torrington Place, London, WC1E 7HD, UK
BUU	Burr-Brown Research Corp., P.O. Box 11400, Tucson, AZ, 85734, USA	NAG	National Semiconductor (UK) Ltd, Harpur Centre, Bedford, MK40 3LF, UK
CMG	Computing Techniques Ltd, Brookers Rd, Billingshurst, Sussex, RH14 9RZ, UK	NAU	National Semiconductor Corp., 2900 Semiconductor Drive, Santa Clara, CA, 95051, USA
DAG	Datel UK Ltd, Stephenson Close, Portway Ind. Estate, Andover, Hants, UK	NIJ	Nippon Electric Co. Ltd, 1753 Shimonumabe, Nakahara-ku, Kawasaki, Japan
DAU	Datel Systems Inc., 1020 Turnpike St., Canton, MA 02021, USA	OAU	Opamp Labs Inc., 1033 N. Sycamore Ave., Los Angeles, CA 90038, USA
FAG	Fairchild Camera & Instrument (UK) Ltd, 230 High St., Potters Bar, Herts., UK	OBS	Obsolete – no longer commercially available.
FAU	Fairchild Semiconductor 464 Ellis St., Mountain View, CA 94042, USA	OTU	Optical Electronics Inc., P.O. Box 11140, Tucson, AZ, 85734, USA
FEG	Ferranti Ltd, (Electronic Department), Gem Mill, Chadderton, Oldham, Lancs., OL9 8NP, UK	PLG	Plessey Semiconductors, Cheney Manor, Swindon, Wilts., SN2 2QW, UK
FUJ	Fujitsu Ltd, 1015 Kamikodanaka, Kawasaki, Japan	PRG	Precision Monolithics (Bourns Trimpot Ltd) 17/27 High St., Hounslow, Middlesex, UK
HAG	Harris Semiconductor (Memec) Ltd, The Firs, Whitchurch, Nr. Aylesbury, Bucks., HP22 4JU, UK	PRU	Precision Monolithics (Bourns) Inc., 1500 Space Park Drive, Santa Clara, CA, 95050, USA
HAU	Harris Semiconductor P.O. Box 883, Melbourne, FL, 32901, USA	RAG	Raytheon Semiconductor The Pinnacles, Harlow, Essex, CM19 5BB, UK
HIJ	Hitachi Ltd (Semiconductor and IC Div.), 1450 Josuiehonimachi, Kodaira City, Tokyo, Japan	RAU	Raytheon Semiconductor, 350 Ellis Street, Mountain View, CA, 94042, USA
ING	Intersil Inc., 8 Tessa Rd, Richfield Trading Estate, Reading, Berks., UK	RCG	RCA (Great Britain) Ltd, Lincoln Way, Windmill Road, Sunbury-on- Thames, Middlesex, UK
INU	Intersil Inc., 10900 N. Tantau Ave, Cupertino, CA, 95014, USA	RCU	RCA Solid State Division Route 202, Somerville, NJ, 08876, USA
ITG	ITT Semiconductors Maidstone Rd, Fooks Cray, Sidcup, Kent,	SAJ	Sanken Electric Co. Ltd, 1-22-8 Nishi-Ikebukuro, Toshima-Ku, Tokyo, Japan

Appendix C

SGG	SGS-ATES (UK) Ltd, Planar House, Walton Street, Aylesbury, Bucks., UK	SPU	Sprague Electric Company (Semiconductor Div.), 115 Northeast Cutoff, Worcester, MA, 01606, USA
SGI	SGS-ATES Componenti Spa, Via Olivetti, 2 Agrate Brianza, 20041, Milan, Italy	TDG	Teledyne Semiconductor, Heathrow House, Bath Road, Cranford, Hounslow, Middlesex, TW5 9QP, UK
SHG	Shindengen Hyokuto Boeki Haisha Ltd, St. Alphage House, Fore St., London, EC2Y 5DA, UK	TDU	Teledyne (Amelco) Semiconductor, 1300 Terra Bella Ave, Mountain View, CA, 94032, USA
SHJ	Shindengen Electric Mfg Co., Ltd, New Ohtemachi Bldng, 2-1, 2-chome, Ohtemachi, Chiyoda-ku, Tokyo, Japan	TEB	Teledyne-Philbrick, Heathrow House, Bath Road, Cranford, Hounslow, Middlesex, TW5 9QP, UK
SIG	Siemens Ltd, Great West Road, Brentford, Middlesex, TW8 9DG, UK	TEU	Teledyne-Philbrick, Allied Drive at Route 128, Dedham, MA, 02026, USA
SIW	Siemens Aktiengesellschaft, Richard-Strauss-Strasse 76, D-8000 Munchen 2, Postfach 202109, W. Germany	TGG	Texas Instruments Ltd, Manton Lane, Bedford, UK
SJG	Signetics International Corporation Yeoman House, 63 Croydon Rd, London, SE20, UK	TGU	Texas Instruments Inc. (Components Group), P.O. Box 5012, Dallas, Texas, 75222, USA
SJU	Signetics Corp., 811 East Arques Ave, Sunnydale, CA. 94086, USA	THF	Thomson-CSF (Sescosem), 50 Rue Jean Pierre Timbaud, BP 120, 92403, Courbevoie, France
SKU	Silicon General Inc., 7382 Bolsa Avenue, Westminster, CA, 92683, USA	THG	Thomson-CSF (UK) Ltd, Ringway House, Bell Rd, Daneshill, Basingstoke, Hants., RG24 0QG, UK.
SLG	Siliconix Ltd, 30A High St., Thatcham, Newbury, Berks., RG13 4JG, UK	TKJ	Tokyo Sanyo Electric Co. Ltd (Semiconductor Div.), Oizumachi, Oragun, Gumma, Japan
SLU	Siliconix Incorporated, 2201 Laurelwood Road, Santa Clara, CA, 95054, USA	TOG	Toshiba (UK) Ltd, Toshiba House, Great South West Rd, Feltham, Middlesex, UK
SOJ	Sony Semiconductor Corp., 14-1, Asa hi-sho 4, Atsuigi-shi, Kanagawa-ken, 243, Japan	TOJ	Toshiba (Tokyo Shibaura) Electric Co., 2-1, 5-chome, Ginza Chuo-ku, Tokyo, Japan
SPG	Sprague Electric (UK) Ltd, 159 High St., Yiewsley, W. Drayton, Middlesex, UB7 7RY, UK	TRU	Transitron Electronic Corp., 168 Albion St., Wakefield, MA, 01881, USA
		ZEU	Zeltex Inc., 940 Detroit Ave, Concord, CA, 94518, USA

Appendix D

IC Manufacturers'

House Numbers

(General Note: Manufacturers often adopt their own 'in-house' serial numbering for their ICs. Listed below are the initial letters of numerical series used by different manufacturers.)

AD	Analog Devices	OP	Precision Monolithics
ADO	Analog Devices	P	Teledyne-Philbrick
AM	Advanced Micro Devices; Datel	PF	Teledyne-Philbrick
AMD	Advanced Micro Devices	PG	General Instruments (obs.)
AMLM	Advanced Micro Devices	PP	Teledyne-Philbrick
AMSSS	Advanced Micro Devices	RA	Radiation (now Harris)
AMU	Advanced Micro Devices	RC	Raytheon
C	Bell & Howell	RL	Raytheon
CA	RCA	RM	Raytheon
CIA	Teledyne-Philbrick	RSN	Raytheon
CMP	Precision Monolithics	RV	Raytheon
CN	Ferranti	S	Signetics
DA	Teledyne-Philbrick	SA	Teledyne-Philbrick
EP	Teledyne-Philbrick	SE	Signetics; Mullard
ESL	Teledyne-Philbrick	SFC	Thomson-CSF
FSL	Teledyne-Philbrick	SG	Silicon General
FSS	Ferranti	SH	Fairchild
HA	Harris	SK	RCA
HEPC	Motorola	SL	Plessey; Teledyne-Philbrick
ICH	Intersil	SN	Texas Instruments
ICL	Intersil	SP	Teledyne-Philbrick
JM	Fairchild	SQ	Teledyne-Philbrick
JSF	Thomson-CSF	SSS	Precision Monolithics
L	Analog Devices; SGS-ATES	SU	Signetics; Mullard
LA	Teledyne-Philbrick	T	Teledyne-Philbrick Transitron
LF	National Semiconductor	TA	AEG-Telefunken
LH	National Semiconductor	TAA	Proelectron Standard
LM	National Semiconductor	TBA	Proelectron Standard
M	Mitsubishi	TBB	Proelectron Standard
MC	Motorola Semiconductors	TBC	Proelectron Standard
MCC	Motorola Semiconductors	TBE	Proelectron Standard
MCCF	Motorola Semiconductors	TCA	Proelectron Standard
MCE	Motorola Semiconductors	TDA	Proelectron Standard
MCH	Motorola Semiconductors	TDB	Proelectron Standard
MIC	ITT Semiconductors	TDC	Proelectron Standard
MLF	Motorola; Teledyne-Philbrick	TDE	Proelectron Standard
MLM	Motorola Semiconductors	TL	AEG-Telefunken
MLMC	Motorola Semiconductors	TOA	Transitron
MONO-OP	Precision Monolithics	TSC	Transitron
N	Signetics; Mullard	U	Fairchild
NC	General Instruments (obs.)	ULN	Sprague
NE	Signetics; Mullard	ULS	Sprague
NH	National Semiconductor	USL	Teledyne-Philbrick
		ZA	Zeltex
		ZEL	Zeltex
		ZLD	Ferranti
		ZN	Ferranti
		μA	Fairchild

Appendix E

Tabulation Codes for Applications

BDO	Balanced differential-output amplifier	PAA	Parametric amplifier
CDA	Current-difference amplifier	PIA	Precision instrumentation amplifier
CHP	Chopper-stabilized amplifier	PRA	Programmable opamp
CPR	DC comparator	QCD	Quad current-difference amplifier
DBD	Dual balanced differential-output amplifier	QCP	Quad comparator
DCP	Dual Comparator	QFE	Quad fet-input opamp
DFE	Dual fet-input opamp	Q GK	Quad general-purpose, internally-compensated, opamp
DGK	Dual general purpose opamp	QGU	Quad general-purpose, uncompensated, opamp
DGU	Dual general-purpose uncompensated opamp	QLQ	Quad low-quiescent-power opamp
DHS	Dual high-slew-rate opamp	QPI	Quad precision instrumentation amplifier
DLN	Dual low-noise opamp	QPR	Quad programmable opamp
DPI	Dual precision instrumentation amplifier	QSB	Quad super-beta opamp
DPR	Dual programmable opamp	SBA	Super-beta opamp
DSB	Dual super-beta opamp	TCP	Triple comparator
FET	Fet-input opamp	TFE	Triple fet-input opamp
GPK	General-purpose, internally-compensated, opamp	TGK	Triple general-purpose, internally compensated, opamp
GPU	General-purpose, uncompensated, opamp	TGU	Triple general-purpose, uncompensated, opamp
HCO	High current output opamp	TLN	Triple low-noise opamp
HIR	High input resistance opamp	TLP	Triple low-quiescent-power opamp
HPO	High power output opamp	TOT	Triple operational transconductance amplifier
HSR	High slew rate opamp	TPI	Triple precision instrumentation amplifier
HVO	High voltage output opamp	TPR	Triple programmable opamp
LBC	Low input bias current opamp	TSB	Triple super-beta opamp
LCD	Low input offset current drift opamp	VFA	Voltage-follower amplifier
LNA	Low noise opamp	WBA	Wide-band opamp
LOC	Low input offset current opamp	XHG	Extra-high-gain opamp
LOV	Low input offset voltage opamp	XLP	Extra-low quiescent power opamp
LQP	Low quiescent power opamp	XSR	Extra-high slew rate opamp
LVD	Low input offset voltage drift opamp	XWB	Extra-wide-band opamp
MWB	Medium-wideband opamp		
OTA	Operational transconductance amplifier		

Appendix G

Codes for Leadout Connections


I: Connection Codes in Serial Order

A	= Gain adjust, 1
A*	= Gain adjust, 2
B	= Bias adjust or set
C	= Case, package, screen
E+	= Input, non-inverting, low-level
E-	= Input, inverting, low-level
F	= Input frequency compensation, 1
F*	= Input frequency compensation, 2
G	= Ground, common, earth, zero volts
J+	= Input, non-inverting, high-level
J-	= Input, inverting, high-level
K	= Output, open collector
L	= Output, open emitter
M	= Metal casing
N	= Not connected, i.e. isolated lead
Q	= Special terminal (consult manufacturer's data)
R	= Output, 1
R*	= Output, 2
S	= Strobe
T	= Offset balance, trim or null, 1
T*	= Offset balance, trim or null, 2
V+	= +ve dc supply
V-	= -ve dc supply
W	= Guard ring
X	= Blank position, lead omitted
++	= +ve supplementary dc supply
--	= -ve supplementary dc supply
φ	= Output frequency compensation, 1
φ*	= Output frequency compensation, 2

II: Lead Assignments in Alphabetical Order

Balance, offset, 1 = T
Balance, offset, 2 = T*
Bias adjust = B
Blank position, without lead = X
Case = C
Compensation, input, 1 = F
Compensation, input, 2 = F*
Compensation, output, 1 = φ
Compensation, output, 2 = φ*
DC supply, +ve = V+
DC supply, -ve = V-
Frequency compensation, input, 1 = F
Frequency compensation, input, 2 = F*
Frequency compensation, output, 1 = φ
Frequency compensation, output, 2 = φ*
Gain adjust, 1 = A
Gain adjust, 2 = A*
Ground = G
Guard ring = W
Input, inverting, high-level = J-
Input, non-inverting, high-level = J+
Input, inverting, low-level = E-
Input, non-inverting, low-level = E+
Input offset voltage, adjust, 1 = T
Input offset voltage, adjust, 2 = T*
Lead omitted, blank position = X
Lead in position but not connected = N
Metal case = M
Not connected, but lead in position = N
Null, offset, 1 = T
Null, offset, 2 = T*
Offset voltage adjust, 1 = T
Offset voltage adjust, 2 = T*
Output, 1 = R
Output, 2 = R*
Output, open-collector = K
Output, open-emitter = L
Package = C
Special purpose terminal (data sheet to be consulted) = Q
Strobe = S
Supply, dc, +ve = V+
Supply, dc, -ve = V-
Supply, dc, supplementary, +ve = ++
Supply, dc, supplementary, -ve = --
Trim (offset voltage), 1 = T
Trim (offset voltage), 2 = T*

Appendix F

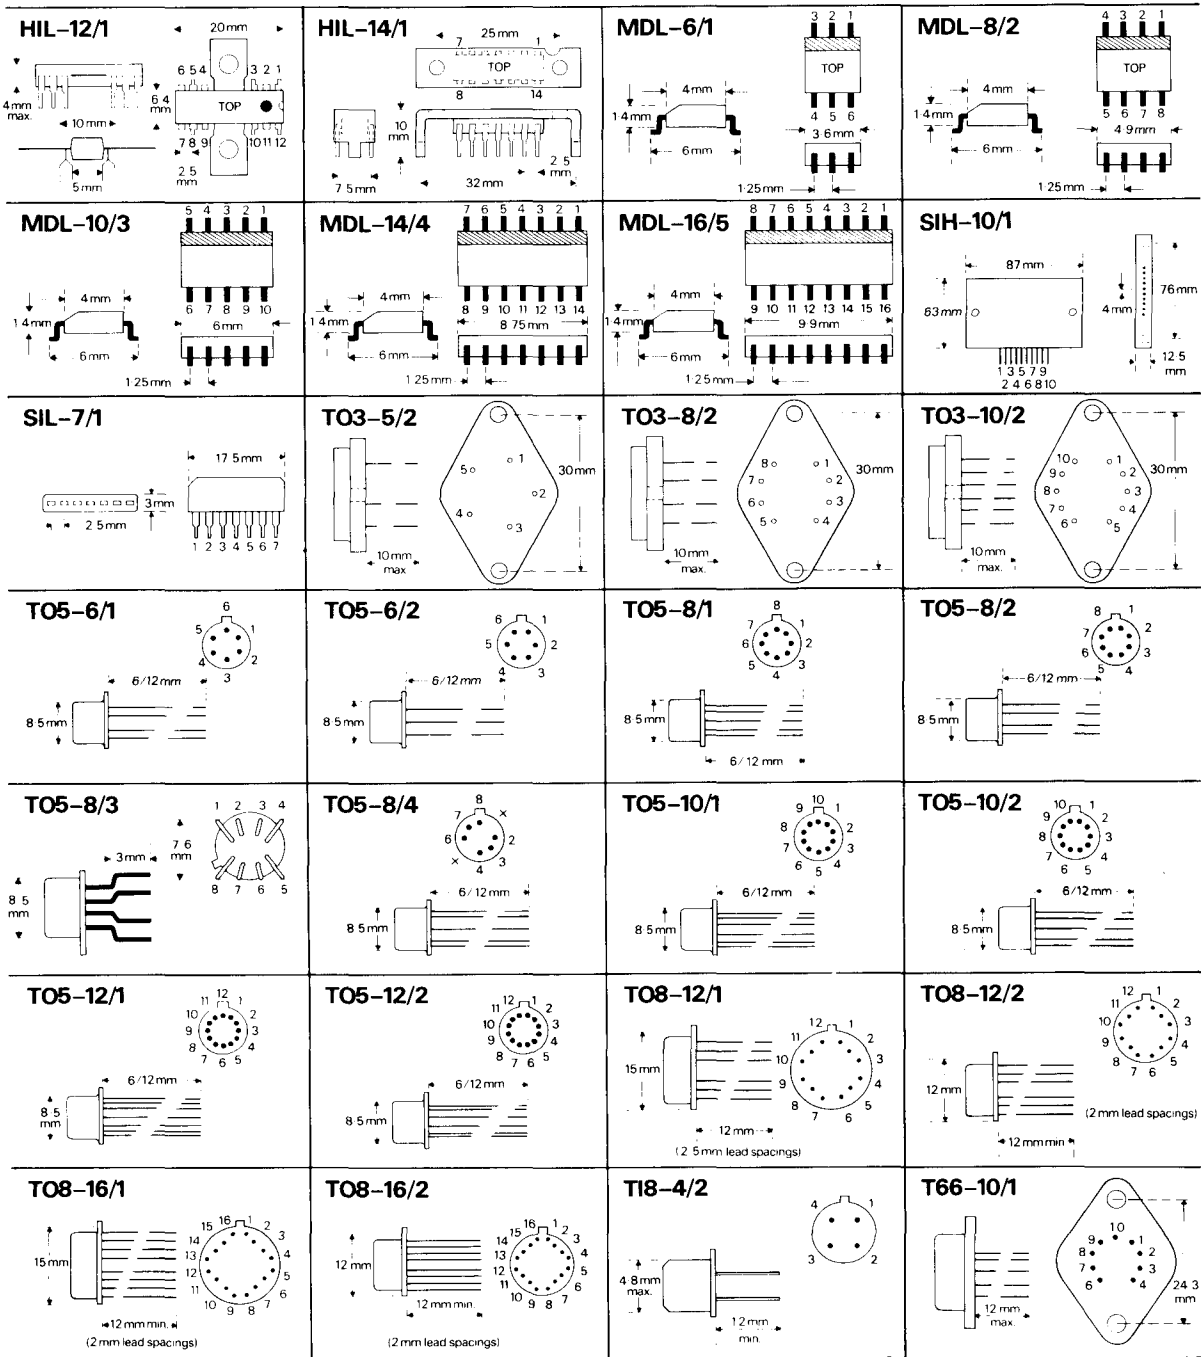

Appendix F

<p>BML BEAM LEAD CHIP</p> <p>(for details see manufacturer's data sheet)</p>	<p>CFL FLIP CHIP</p> <p>(for details see manufacturer's data sheet)</p>	<p>CHP CHIP (face up)</p> <p>(for details see manufacturer's data sheet)</p>	<p>DIL-6/1</p>
<p>DIL-8/1</p>	<p>DIL-10/1</p>	<p>DIL-12/1</p>	<p>DIL-14/1</p>
<p>DIL-16/1</p>	<p>DIM-5/4</p>	<p>DIM-7/5</p>	<p>DIM-8/3</p>
<p>DIM-9/5</p>	<p>DIM-11/5</p>	<p>DIM-14/1</p>	<p>FLP-5/6</p>
<p>FLP-6/1</p>	<p>FLP-6/2</p>	<p>FLP-8/2</p>	<p>FLP-10/1</p>
<p>FLP-10/3</p>	<p>FLP-14/3</p>	<p>FLP-16/3</p>	<p>FLP-16/4</p>