

Medium Power Bipolar Transistor



Pin Configuration

1. Emitter
2. Base
3. Collector

Features:

- High performance, low frequency devices typically with current ratings 1A. Up to 1W power dissipation
- Silicon power switching transistors
- Medium power amplifier and switching applications

Datasheet.Directory

Absolute Maximum Ratings:

($T_a = 25^\circ\text{C}$ unless otherwise specified)

Characteristic	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	-100	V
Collector-Emitter Voltage	V_{CEO}	-75	
Emitter-Base Voltage	V_{EBO}	-7	
Collector Current Continuous	I_C	-2	A
Base Current	I_B	-1	
Power Dissipation at $T_a = 25^\circ\text{C}$ Derate above 25°C	P_D	1	W
Power Dissipation at $T_c = 25^\circ\text{C}$ Derate above 25°C		57.14	
Operating Temperature	T_J	200	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65 to +200	

Thermal Resistance

Junction to Ambient	$R_{th(j-a)}$	175	$^\circ\text{C/W}$
Junction to Case	$R_{th(j-c)}$	17.5	

Medium Power Bipolar Transistor

Electrical Characteristics:

($T_a = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Max.	Unit
Collector Emitter Voltage	V_{CEO}	$I_C = 100\text{mA}, I_B = 0$	-75	-	V
Collector Cut off Current	I_{CEX}	$V_{CE} = 70\text{V}, V_{BE} = 1.5\text{V}, T_C = 150^\circ\text{C}$	-	5	mA
		$V_{CE} = 100\text{V}, V_{BE} = 1.5\text{V}$		100	μA
Emitter Cut off Current	I_{EBO}	$V_{BE} = 7\text{V}, I_C = 0$			
DC Current Gain	$^*h_{FE}$	$I_C = 1\text{A}, V_{CE} = 2\text{V}$	10	-	-
		$I_C = 0.5\text{A}, V_{CE} = 4\text{V}$	30	130	
Collector Emitter Saturation Voltage	$^*V_{CE(Sat)}$	$I_C = 50\text{mA}, I_B = 50\text{mA}$	-	0.7	V
Base Emitter On Voltage	$^*V_{BE(On)}$	$I_C = 50\text{mA}, V_{CE} = 4\text{V}$		1.1	

Dynamic Characteristics

Small Signal Current Gain	h_{fe}	$I_C = 50\text{mA}, V_{CE} = 4\text{V}, f = 10\text{MHz}$	5	-	-
---------------------------	----------	---	---	---	---


Switching Characteristics

Turn On Time	t_{on}	$V_{CC} = 30\text{V}, I_C = 500\text{mA}, I_{B1} = 50\text{mA}$	-	100	ns
Turn Off Time	t_{off}	$V_{CC} = 30\text{V}, I_C = 500\text{mA}, I_{B1} = I_{B2} = 50\text{mA}$		1,000	

*Pulsed: Pulse Width $\leq 30\mu\text{s}$, Duty Cycle $\leq 2\%$


Medium Power Bipolar Transistor

TO-39 Metal Can Package

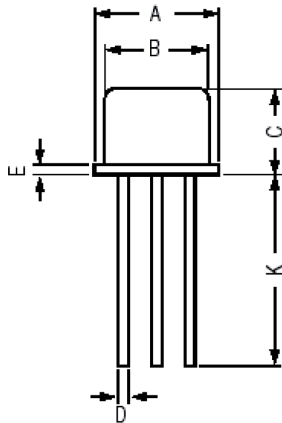

Dim.	Min.	Max.
A	8.5	9.39
B	7.74	8.5
C	6.09	6.6
D	0.4	0.53
E	-	0.88
F	2.41	2.66
G	4.82	5.33
H	0.71	0.86
J	0.73	1.02
K	12.7	-
L	42°	48°

Dimensions : Millimetres

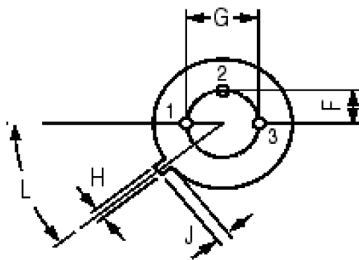

Pin Configuration

1. Emitter
2. Base
3. Collector

Part Number Table

Description	Part Number
Transistor, PNP, TO-39	2N5322

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.