


Features

- Ideally Suited for Automatic Insertion
- Epitaxial Planar Die Construction
- For Switching, AF Driver and Amplifier Applications
- Complementary NPN Types Available (BC817)
- **Lead Free/RoHS Compliant (Note 3)**
- **Qualified to AEC-Q101 Standards for High Reliability**

Mechanical Data

- Case: SOT-23
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Pin Connections: See Diagram
- Marking (See Page 3): BC807-16 5A, K5A
BC807-25 5B, K5B
BC807-40 5C, K5C
- Ordering & Date Code Information: See Page 3
- Weight: 0.008 grams (approximate)

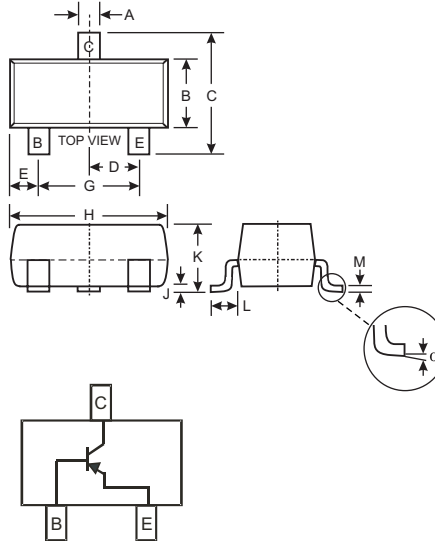

SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
E	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.085	0.180
α	0°	8°
All Dimensions in mm		


Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	-45	V
Emitter-Base Voltage	V_{EBO}	-5.0	V
Collector Current	I_C	-500	mA
Peak Collector Current	I_{CM}	-1000	mA
Peak Emitter Current	I_{EM}	-1000	mA
Power Dissipation at $T_{SB} = 50^\circ\text{C}$ (Note 1)	P_d	310	mW
Thermal Resistance, Junction to Substrate Backside (Note 1)	$R_{\theta JSB}$	320	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Ambient Air (Note 1)	$R_{\theta JA}$	403	$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150	$^\circ\text{C}$


Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic (Note 2)	Symbol	Min	Typ	Max	Unit	Test Condition
DC Current Gain	h_{FE}	100	—	250	—	$V_{CE} = 1.0\text{V}, I_C = 100\text{mA}$
		160		400		
		250		600		
		60		—		
100	—					
170	—					
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	—	—	-0.7	V	$I_C = 500\text{mA}, I_B = 50\text{mA}$
Base-Emitter Voltage	V_{BE}	—	—	-1.2	V	$V_{CE} = 1.0\text{V}, I_C = 300\text{mA}$
Collector-Emitter Cutoff Current	I_{CES}	—	—	-100 -5.0	nA μA	$V_{CE} = 45\text{V}$ $V_{CE} = 25\text{V}, T_j = 150^\circ\text{C}$
Emitter-Base Cutoff Current	I_{EBO}	—	—	-100	nA	$V_{EB} = 4.0\text{V}$
Gain Bandwidth Product	f_T	100	—	—	MHz	$V_{CE} = 5.0\text{V}, I_C = 10\text{mA}, f = 50\text{MHz}$
Collector-Base Capacitance	C_{CBO}	—	—	12	pF	$V_{CB} = 10\text{V}, f = 1.0\text{MHz}$


- Notes: 1. Device mounted on ceramic substrate 0.7mm; 2.5cm² area.
2. Short duration pulse test used to minimize self-heating effect.
3. No purposefully added lead.

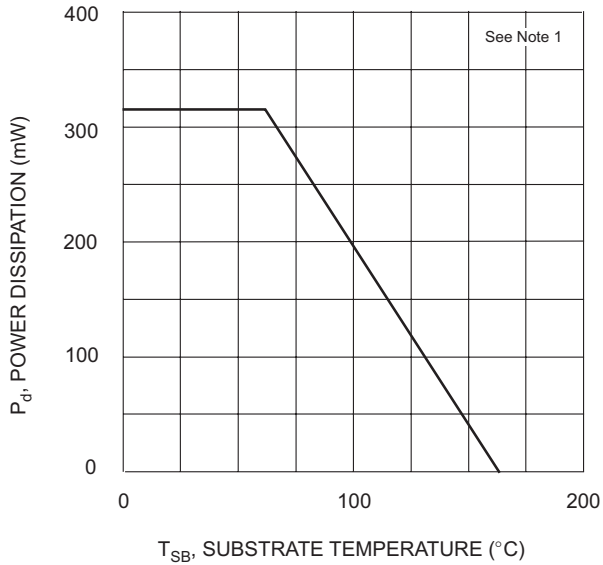


T_{SB} , SUBSTRATE TEMPERATURE ($^{\circ}C$)
 Fig. 1, Power Derating Curve

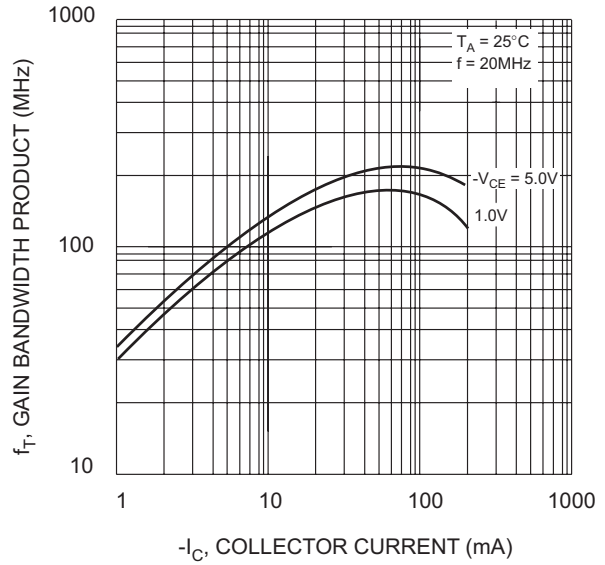


$-I_C$, COLLECTOR CURRENT (mA)
 Fig. 2, Gain-Bandwidth Product vs Collector Current

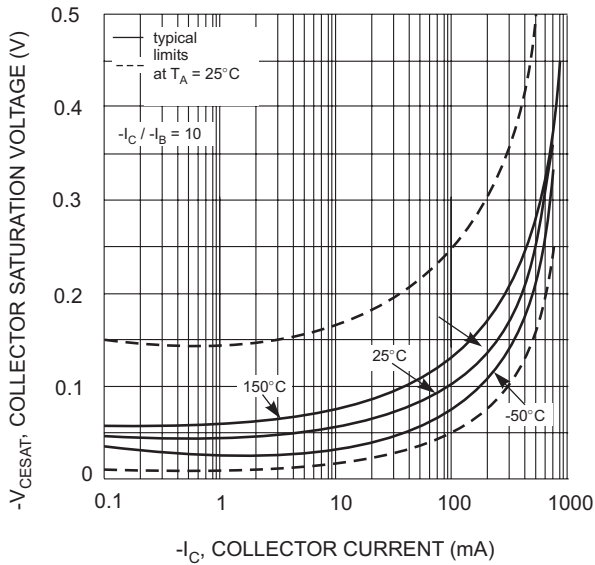


$-I_C$, COLLECTOR CURRENT (mA)
 Fig. 3, Collector Sat. Voltage vs Collector Current

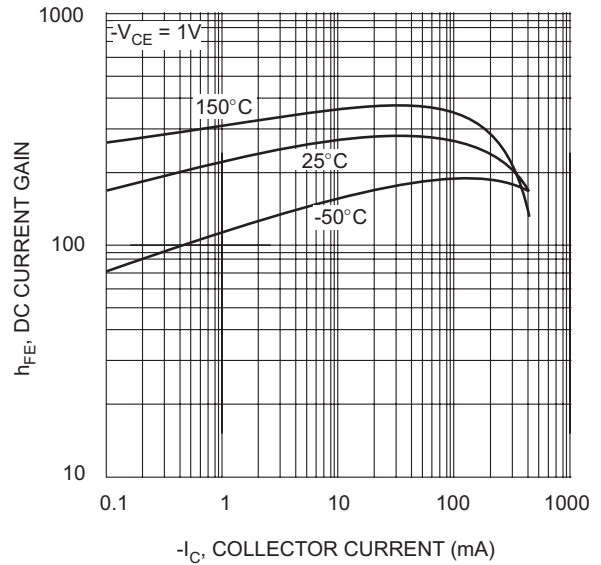

$-I_C$, COLLECTOR CURRENT (mA)
 Fig. 4, DC Current Gain vs Collector Current

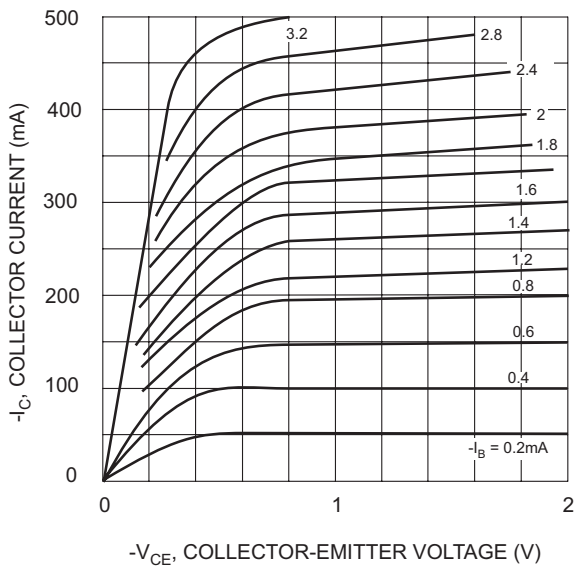

$-V_{CE}$, COLLECTOR-EMITTER VOLTAGE (V)
 Fig. 5, Typical Emitter-Collector Characteristics

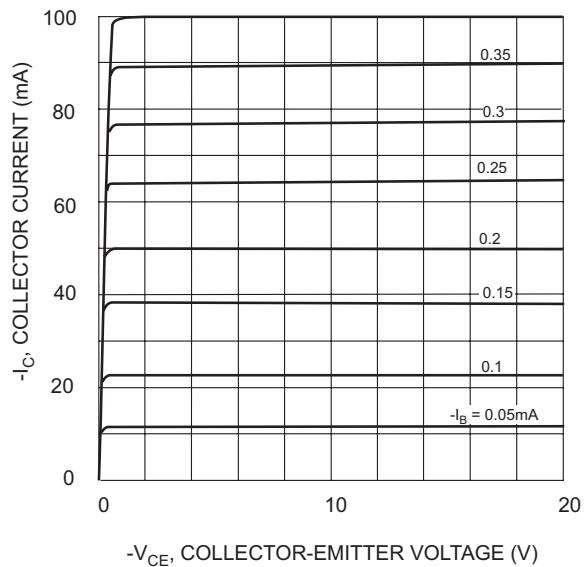

$-V_{CE}$, COLLECTOR-EMITTER VOLTAGE (V)
 Fig. 6, Typical Emitter-Collector Characteristics


Ordering Information (Note 4)

Device*	Packaging	Shipping
BC807-xx-7-F	SOT-23	3000/Tape & Reel

Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

*xx = gain group, eg. BC807-16-7-F.

Marking Information



XXX = Product Type Marking Code (See Page 1): e.g. K5A = BC807-16

YM = Date Code Marking

Y = Year ex: N = 2002

M = Month ex: 9 = September

Date Code Key

Year	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
Code	J	K	L	M	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

IMPORTANT NOTICE

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

The products located on our website at www.diodes.com are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Diodes Incorporated.