

LM431

Adjustable Precision Zener Shunt Regulator

General Description


The LM431 is a 3-terminal adjustable shunt regulator with guaranteed temperature stability over the entire temperature range of operation. The output voltage may be set at any level greater than 2.5V (V_{REF}) up to 36V merely by selecting two external resistors that act as a voltage divided network. Due to the sharp turn-on characteristics this device is an excellent replacement for many zener diode applications.

Features

- Average temperature coefficient 50 ppm/ $^{\circ}\text{C}$
- Temperature compensated for operation over the full temperature range
- Programmable output voltage
- Fast turn-on response
- Low output noise

Connection Diagrams

TO-92: Plastic Package




TL/H/10055-1

Top View

Order Number LM431ACZ,
LM431AIZ,
LM431BCZ, LM431BIZ, LM431CCZ
or LM431CIZ

SO-8: 8-Pin Surface Mount




TL/H/10055-2

Top View

Order Number LM431ACM,
LM431AIM,
LM431BCM, LM431BIM, LM431CCM
or LM431CIM

SOT-23: 3-Lead Small Outline



TL/H/10055-28

Top View

Order Number LM431ACM3,
LM431AIM3,
LM431BCM3, LM431BIM3,
LM431CCM3
or LM431CIM3

Ordering Information*

Package	Typical Accuracy			Temperature Range
	0.5%	1%	2%	
TO-92	LM431CCZ LM431CIZ	LM431BCZ LM431BIZ	LM431ACZ LM431AIZ	0°C to + 70°C -40°C to + 85°C
SO-8	LM431CCM LM431CIM	LM431BCM LM431BIM	LM431ACM LM431AIM	0°C to + 70°C -40°C to + 85°C
SOT-23	LM431CCM3 LM431CIM3	LM431BCM3 LM431BIM3	LM431ACM3 LM431AIM3	0°C to + 70°C -40°C to + 85°C

*See Table 1 for package marking for SOT-23.

6501124 0105927 133

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature Range -65°C to $+150^{\circ}\text{C}$

Operating Temperature Range

Industrial (LM431xi) -40°C to $+85^{\circ}\text{C}$

Commercial (LM431xC) 0°C to $+70^{\circ}\text{C}$

Lead Temperature

TO-92 Package/SO-8 Package/SOT-23 Package

(Soldering, 10 sec.) 265°C

Internal Power Dissipation (Notes 1, 2)

TO-92 Package 0.78W

SO-8 Package 0.81W

SOT-23 Package 0.28W

Cathode Voltage	37V	
Continuous Cathode Current	Min	Max
Reference Voltage	-10 mA to $+150\text{ mA}$	
Reference Input Current	-0.5 V	
Operating Conditions	Min	Max
Cathode Voltage	V_{REF}	37V
Cathode Current	1.0 mA	100 mA

Note 1: $T_J \text{ Max} = 150^{\circ}\text{C}$.

Note 2: Ratings apply to ambient temperature at 25°C . Above this temperature, derate the TO-92 at $6.2\text{ mW}/^{\circ}\text{C}$, the SO-8 at $6.5\text{ mW}/^{\circ}\text{C}$, and the SOT-23 at $2.2\text{ mW}/^{\circ}\text{C}$.

LM431

Electrical Characteristics $T_A = 25^{\circ}\text{C}$ unless otherwise specified


Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{REF}	Reference Voltage	$V_Z = V_{\text{REF}}, I_I = 10\text{ mA}$ LM431A (Figure 1)	2.440	2.495	2.550	V
		$V_Z = V_{\text{REF}}, I_I = 10\text{ mA}$ LM431B (Figure 1)	2.470	2.495	2.520	V
		$V_Z = V_{\text{REF}}, I_I = 10\text{ mA}$ LM431C (Figure 1)	2.485	2.500	2.510	V
V_{DEV}	Deviation of Reference Input Voltage Over Temperature (Note 3)	$V_Z = V_{\text{REF}}, I_I = 10\text{ mA},$ $T_A = \text{Full Range}$ (Figure 1)		8.0	17	mV
$\Delta V_{\text{REF}}/\Delta V_Z$	Ratio of the Change in Reference Voltage to the Change in Cathode Voltage	$I_Z = 10\text{ mA}$ (Figure 2)	V_Z from V_{REF} to 10V	-1.4	-2.7	mV/V
			V_Z from 10V to 36V	-1.0	-2.0	
I_{REF}	Reference Input Current	$R_1 = 10\text{ k}\Omega, R_2 = \infty,$ $I_I = 10\text{ mA}$ (Figure 2)		2.0	4.0	μA
αI_{REF}	Deviation of Reference Input Current over Temperature	$R_1 = 10\text{ k}\Omega, R_2 = \infty,$ $I_I = 10\text{ mA},$ $T_A = \text{Full Range}$ (Figure 2)		0.4	1.2	μA
$I_Z(\text{MIN})$	Minimum Cathode Current for Regulation	$V_Z = V_{\text{REF}}$ (Figure 1)		0.4	1.0	mA
$I_Z(\text{OFF})$	Off-State Current	$V_Z = 36\text{V}, V_{\text{REF}} = 0\text{V}$ (Figure 3)		0.3	1.0	μA
r_Z	Dynamic Output Impedance (Note 4)	$V_Z = V_{\text{REF}}, \text{LM431A},$ Frequency = 0 Hz (Figure 1)			0.75	Ω
		$V_Z = V_{\text{REF}}, \text{LM431B, LM431C}$ Frequency = 0 Hz (Figure 1)			0.50	Ω

■ 6501124 0105928 07T ■

LM431

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified (Continued)

Note 3: Deviation of reference input voltage, V_{DEV} , is defined as the maximum variation of the reference input voltage over the full temperature range.

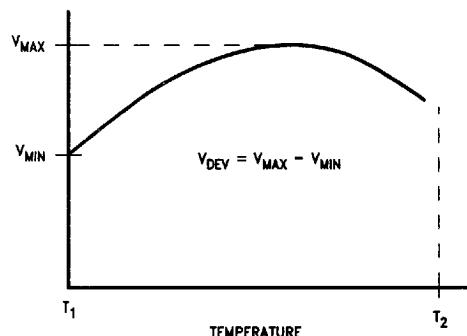

TL/H/10055-7

The average temperature coefficient of the reference input voltage, αV_{REF} , is defined as:

$$\alpha V_{REF} \frac{\text{ppm}}{^\circ\text{C}} = \frac{\pm \left[\frac{V_{MAX} - V_{MIN}}{V_{REF} (\text{at } 25^\circ\text{C})} \right] 10^6}{T_2 - T_1} = \frac{\pm \left[\frac{V_{DEV}}{V_{REF} (\text{at } 25^\circ\text{C})} \right] 10^6}{T_2 - T_1}$$

Where:

$T_2 - T_1$ = full temperature change.

αV_{REF} can be positive or negative depending on whether the slope is positive or negative.

Example: $V_{DEV} = 8.0 \text{ mV}$, $V_{REF} = 2495 \text{ mV}$, $T_2 - T_1 = 70^\circ\text{C}$, slope is positive.

$$\alpha V_{REF} = \frac{\left[\frac{8.0 \text{ mV}}{2495 \text{ mV}} \right] 10^6}{70^\circ\text{C}} = +46 \text{ ppm/}^\circ\text{C}$$


Note 4: The dynamic output impedance, r_Z , is defined as:

$$r_Z = \frac{\Delta V_Z}{\Delta I_Z}$$

When the device is programmed with two external resistors, R_1 and R_2 , (see Figure 2), the dynamic output impedance of the overall circuit, r_Z , is defined as:


$$r_Z = \frac{\Delta V_Z}{\Delta I_Z} \approx \left[r_Z \left(1 + \frac{R_1}{R_2} \right) \right]$$

Equivalent Circuit

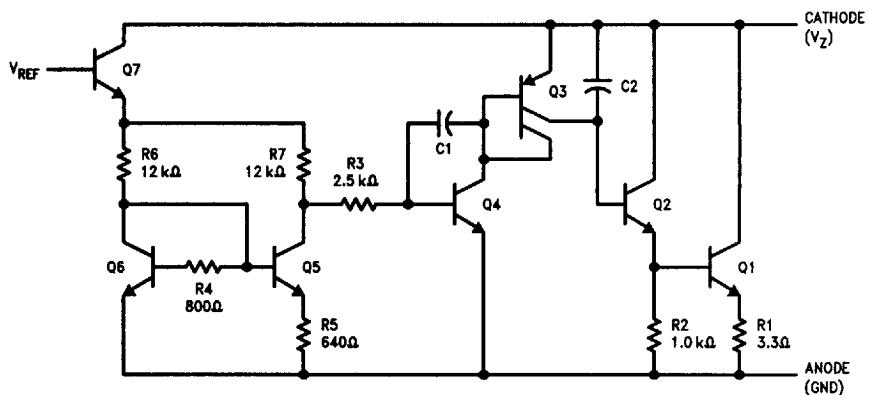


TL/H/10055-3

DC Test Circuits



TL/H/10055-4


FIGURE 1. Test Circuit for $V_Z = V_{REF}$



TL/H/10055-5

Note: $V_Z = V_{REF}(1 + R_1/R_2) + I_{REF} \cdot R_1$

FIGURE 2. Test Circuit for $V_Z > V_{REF}$






TL/H/10055-6



FIGURE 3. Test Circuit for Off-State Current

■ 6501124 0105930 728 ■


Typical Performance Characteristics



TL/H/10055-8




TL/H/10055-9

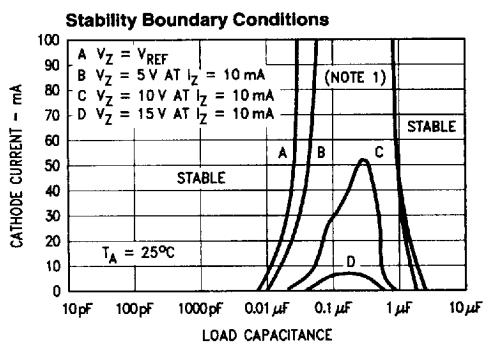


Note 1: The areas under the curves represent conditions that may cause the device to oscillate. For curves B, C, and D, R2 and V^+ were adjusted to establish the initial V_Z and I_Z conditions with $C_L = 0\text{ V}^+$ and C_L were then adjusted to determine the ranges of stability.

TL/H/10055-11




TL/H/10055-12

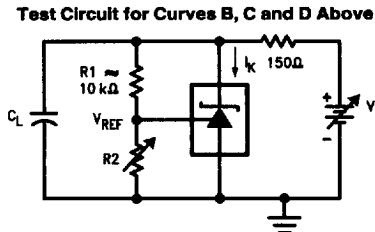


TL/H/10055-13

Typical Applications

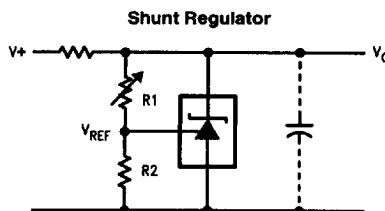


$$V_O \approx \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$

Single Supply Comparator with Temperature Compensated Threshold




TL/H/10055-15

Series Regulator

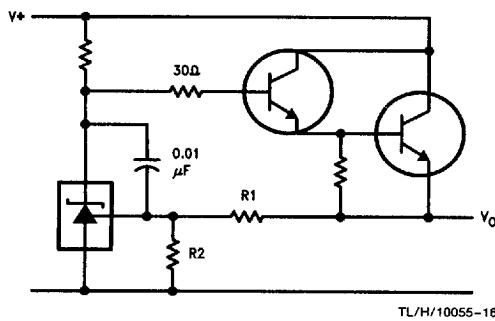

$$V_O \approx \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$

Output Control of a Three Terminal Fixed Regulator



TL/H/10055-17


$$V_O = \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$

$$V_{O\ MIN} = V_{REF} + 5V$$

■ 6501124 0105932 5T0 ■

Typical Applications (Continued)


Higher Current Shunt Regulator

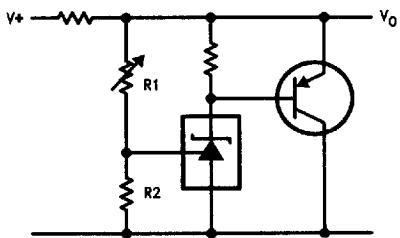

TL/H/10055-18

$$V_O = \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$


Crow Bar

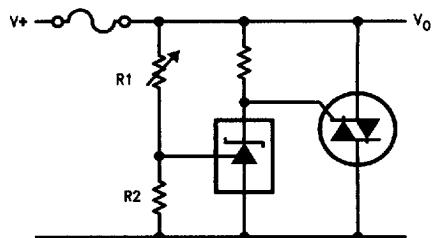

TL/H/10055-19

$$V_{LIMIT} \approx \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$

Over Voltage/Under Voltage Protection Circuit

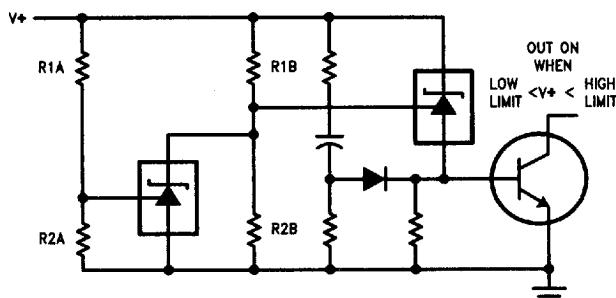


TL/H/10055-20

$$\text{LOW LIMIT} \approx V_{REF} \left(1 + \frac{R_{1B}}{R_{2B}}\right) + V_{BE}$$

$$\text{HIGH LIMIT} \approx V_{REF} \left(1 + \frac{R_{1A}}{R_{2A}}\right)$$

OUT ON WHEN
LOW LIMIT < V+ < HIGH LIMIT

Voltage Monitor

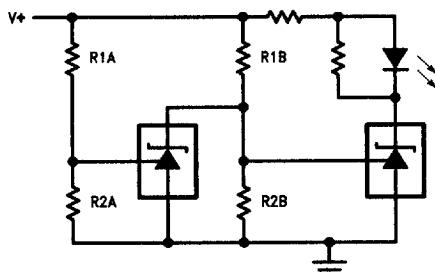

TL/H/10055-21


$$\text{LOW LIMIT} \approx V_{REF} \left(1 + \frac{R_{1B}}{R_{2B}}\right) \quad \text{LED ON WHEN}$$

LOW LIMIT < V+ < HIGH LIMIT

$$\text{HIGH LIMIT} \approx V_{REF} \left(1 + \frac{R_{1A}}{R_{2A}}\right)$$

Typical Applications (Continued)


Delay Timer

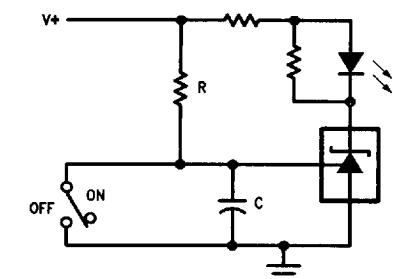

TL/H/10055-22

$$\text{DELAY} = R \cdot C \cdot \ln \frac{V_+}{(V_+) - V_{\text{REF}}}$$


Current Limiter or Current Source

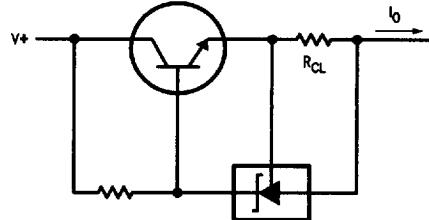

TL/H/10055-23


$$I_O = \frac{V_{\text{REF}}}{R_{\text{CL}}}$$

Constant Current Sink



TL/H/10055-24

Recommended Solder Pads for SOT-23 Package





TL/H/10055-27

TABLE 1. Package Marking for SOT-23



Order Number	Top Mark
LM431ACM3	N1F
LM431AIM3	N1E
LM431BCM3	N1D
LM431BIM3	N1C
LM431CCM3	N1B
LM431CIM3	N1A

6501124 0105934 373

Physical Dimensions inches (millimeters) unless otherwise noted

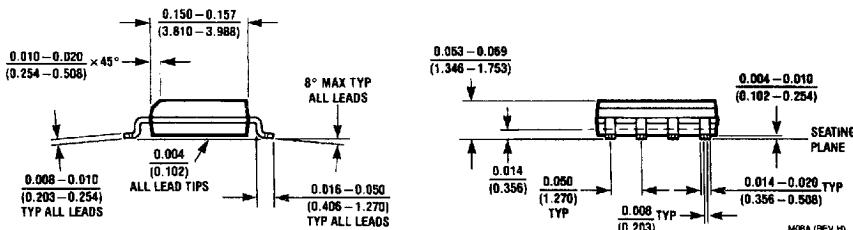


Order Number LM431ACM or LM431AIM
NS Package Number M08A

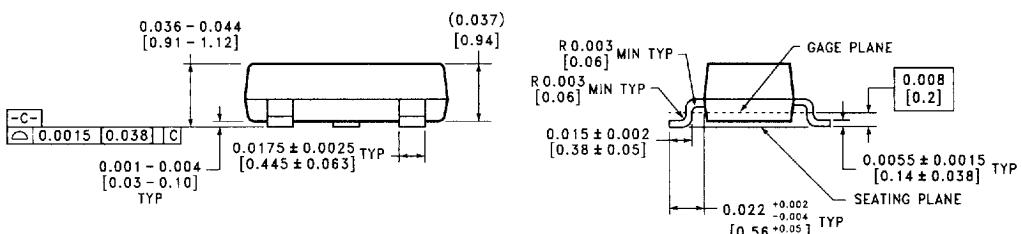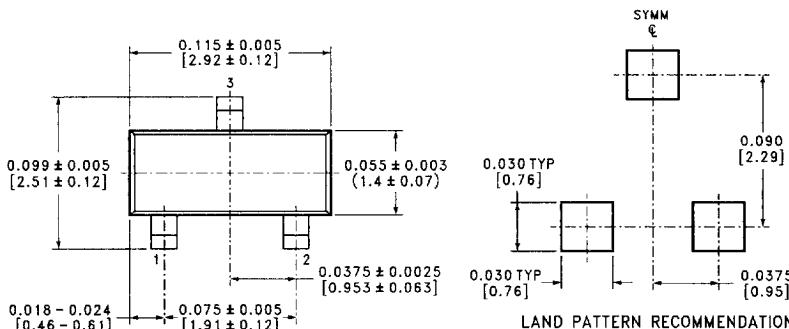

SOT-23 Molded Small Outline Transistor Package (M3)
Order Number LM60BIM3 or LM60CIM3
NS Package Number MA03B

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

Lit # 106475-001

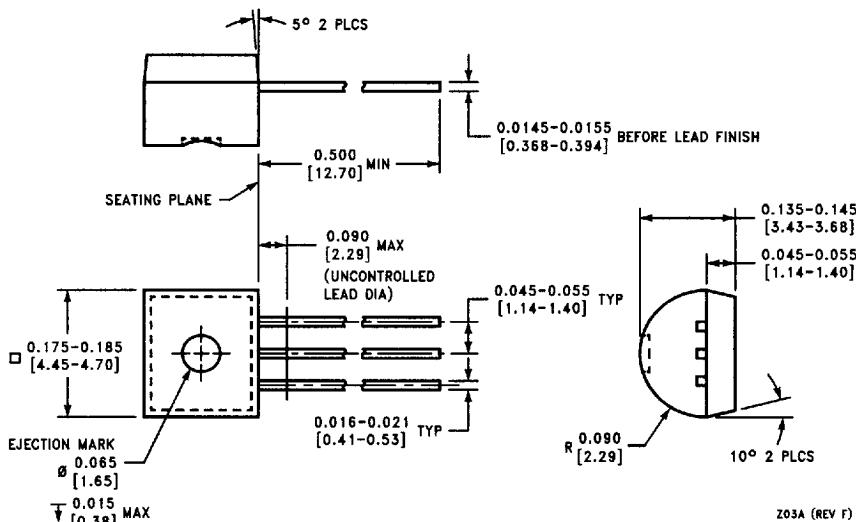

Order Number LM431ACZ or LM431AIZ
NS Package Number Z03A

Z03A (REV F)

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: (800) 272-9959
Fax: (800) 737-7018

<http://www.national.com>

National Semiconductor Europe
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 180-530 85 85
English Tel: +49 (0) 180-532 78 32
Français Tel: +49 (0) 180-532 93 58
Italiano Tel: +49 (0) 180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2308
Fax: 81-043-299-2408

51393

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.