High-current terminal block - PTPOWER 50-3L - 3260053

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



High-current terminal block, Blocked, nom. voltage: 1000 VAC / 1500 VDC, nominal current: 150 A, connection method: Power-Turn connection, number of connections: 6, number of positions: 3, cross section: 10 mm² - 70 mm², AWG: 8 - 2/0, width: 60 mm, color: gray, mounting type: NS 35/15

Your advantages

- Quick and easy connection is now also possible for large conductors with the high-current terminal block
- The compact design enables wiring in a confined space
- In addition to using the existing test connection, pick-off terminal blocks can be connected, each of which can also accommodate two test cables
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors

Datasheet.Directory

RoHS COMPLETE line

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	3 pc
GTIN	4 046356 998659
GTIN	4046356998659
Weight per Piece (excluding packing)	473.330 g
Custom tariff number	85369010
Country of origin	Poland

Technical data

General

Number of positions	3
Number of levels	1
Number of connections	6
Potentials	1

High-current terminal block - PTPOWER 50-3L - 3260053

Technical data

General

Nominal cross section	50 mm²
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V0
Rated surge voltage	8 kV
Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Maximum power dissipation for nominal condition	4.73 W
Maximum load current	150 A (with 50 mm² conductor cross section)
Nominal current I_N	150 A
Nominal voltage U_N	1000 VAC
	1500 VDC
Open side panel	No
Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature 130°C)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24h, -60°C to +70°C)
Permissible humidity (storage/transport)	30 % ... 70 %
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Static insulating material application in cold	-60 °C
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Smoke gas toxicity NFPA 130 (SMP 800C)	passed
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3

Dimensions

Width	60 mm
Length	101 mm
Height NS 35/15	105 mm

Connection data

Connection	1 level

High-current terminal block - PTPOWER 50-3L - 3260053

Technical data

Connection data

Connection method	Power-Turn connection
Stripping length	30 mm ... 32 mm
Connection in acc. with standard	IEC60947-7-1
Conductor cross section solid min.	10 mm²
Conductor cross section solid max.	70 mm²
Conductor cross section AWG min.	8
Conductor cross section AWG max.	2/0
Conductor cross section flexible min.	10 mm²
Conductor cross section flexible max.	70 mm²
Min. AWG conductor cross section, flexible	8
Max. AWG conductor cross section, flexible	2/0
Conductor cross section flexible, with ferrule without plastic sleeve min.	10 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max.	50 mm²
Conductor cross section flexible, with ferrule with plastic sleeve min.	10 mm²
Conductor cross section flexible, with ferrule with plastic sleeve max.	50 mm²
Cross section with insertion bridge solid min.	10 mm²
Cross section with insertion bridge, solid max.	50 mm²
Cross section with insertion bridge stranded min.	10 mm²
Cross section with insertion bridge, stranded max.	50 mm²
Cross section with insertion bridge stranded, with ferrule without plastic sleeve min.	10 mm²
Cross section with insertion bridge stranded, with ferrule without plastic sleeve max.	50 mm²
Cross section with insertion bridge stranded, with ferrule without plastic sleeve min.	10 mm²
Cross section with insertion bridge stranded, with ferrule with plastic sleeve max.	50 mm²
Connection cross sections directly pluggable	10 mm² 70 mm² 8 2/0
Conductor cross section solid min.	10 mm²
Conductor cross section solid max.	70 mm²
Conductor cross section flexible, with ferrule without plastic sleeve min.	10 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max.	50 mm²
Conductor cross section flexible, with ferrule with plastic sleeve min.	10 mm²
Conductor cross section flexible, with ferrule with plastic sleeve max.	50 mm²
Internal cylindrical gage	A10

Standards and Regulations

Connection in acc. with standard	IEC60947-7-1
Flammability rating according to UL 94	V0

High-current terminal block - PTPOWER 50-3L - 3260053

Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Circuit diagram

Schematic diagram

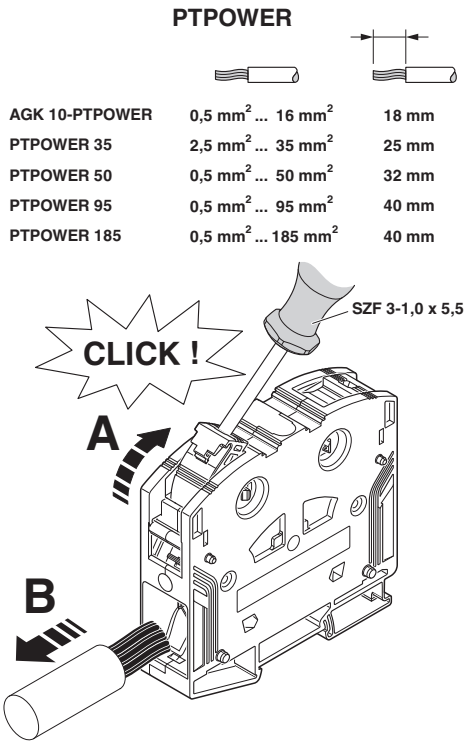

Classifications

eCl@ss

eCl@ss 10.0.1	27141120
eCl@ss 11.0	27141120
eCl@ss 5.0	27141100
eCl@ss 5.1	27141100
eCl@ss 6.0	27141100
eCl@ss 7.0	27141120

High-current terminal block - PTPOWER 50-3L - 3260053

Classifications

eCl@ss

eCl@ss 8.0	27141120
eCl@ss 9.0	27141120

ETIM

ETIM 5.0	EC000897
ETIM 6.0	EC000897
ETIM 7.0	EC000897

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410
UNSPSC 18.0	39121410
UNSPSC 19.0	39121410
UNSPSC 20.0	39121410
UNSPSC 21.0	39121410

Approvals

Approvals

Approvals

DNV GL / CSA / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approval details

DNV GL		https://approvalfinder.dnvgl.com/	TAE00000Z9

High-current terminal block - PTPOWER 50-3L - 3260053

Approvals

CSA http://www.csagroup.org/services-industries/product-listing/ 13631

	B	C
Nominal voltage UN	600 V	1000 V
Nominal current IN	140 A	140 A
mm²/AWG/kcmil	8	8

UL Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 60425

Nominal voltage UN	1000 V
Nominal current IN	140 A
mm²/AWG/kcmil	8

cUL Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 60425

	C
Nominal voltage UN	1000 V
Nominal current IN	140 A
mm²/AWG/kcmil	8

EAC RU C-DE.A*30.B.01742

EAC RU C-DE.AI30.B.01102

cULus Recognized

Accessories

Accessories

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Cable end sleeve

Ferrule - A 10 -32 - 1090629

Ferrule, length: 32 mm, color: silver

Ferrule - A 16 -32 - 1090633

Ferrule, length: 32 mm, color: silver

Ferrule - A 25 -32 - 1090636

Ferrule, length: 32 mm, color: silver

Ferrule - A 35 -32 - 1090638

Ferrule, length: 32 mm, color: silver

Ferrule - A 50 -32 - 1090639

Ferrule, length: 32 mm, color: silver

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Crimping tool

Crimping pliers - CRIMPFOX CENTRUS 10S - 1213154

Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 10 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

---

Crimping pliers - CRIMPFOX CENTRUS 10H - 1213156

Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 10 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

---

Crimping pliers - CRIMPFOX 10S - 1212045

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm² ... 10 mm², unlockable pressure lock, lateral entry

---

Crimping pliers - CRIMPFOX 10 - 1212721

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 4 mm² ... 10 mm², lateral entry, trapezoidal crimp

---

Crimping pliers - CRIMPFOX 25R - 1212039

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 10 mm² ... 25 mm², lateral entry, WM crimp

---

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Crimping pliers - CRIMPFOX 50R - 1212041

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 35 mm² ... 50 mm², lateral entry, WM crimp

---

Crimping pliers - CRIMPFOX-M - 1212072

Basic pliers, for accommodating dies for a wide range of type of contacts

---

Crimping pliers - CRIMPFOX-C120 - 1212318

Basic pliers, for accommodating dies for a wide range of type of contacts up to 120 mm²

DIN rail

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730

DIN rail perforated, Standard profile, width:35 mm, height:15 mm, similar to EN 60715, material:Steel, galvanized, passivated with a thick layer, length:2000 mm, color:silver

---

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714

DIN rail, unperforated, Standard profile, width:35 mm, height:15 mm, similar to EN 60715, material:Steel, galvanized, passivated with a thick layer, length:2000 mm, color:silver

---

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602

DIN rail perforated, Standard profile, width:35 mm, height:15 mm, similar to EN 60715, material:Steel, Galvanized, white passivated, length:2000 mm, color:silver

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM - 1204135

DIN rail, unperforated, Standard profile, width:35 mm, height:15 mm, similar to EN 60715, material:Steel, Galvanized, white passivated, length:2000 mm, color:silver

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756

DIN rail, unperforated, Standard profile, width:35 mm, height:15 mm, similar to EN 60715, material:Aluminum, uncoated, length:2000 mm, color:silver

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599

DIN rail perforated, Standard profile, width:35 mm, height:15 mm, similar to EN 60715, material:Steel, galvanized, length:2000 mm, color:silver

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586

DIN rail, unperforated, Standard profile, width:35 mm, height:15 mm, similar to EN 60715, material:Steel, galvanized, length:2000 mm, color:silver

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM - 1201895

DIN rail, unperforated, Standard profile, width:35 mm, height:15 mm, similar to EN 60715, material:Copper, uncoated, length:2000 mm, color:copper-colored

End cap - NS 35/15 CAP - 1206573

DIN rail end piece, for DIN rail NS 35/15

Documentation

Mounting material - PTPOWER-IL - 1180891

Operating decal for the PTPOWER

End block

End clamp - E/AL-NS 35 - 1201662

End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

Insertion bridge

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Insertion bridge - EB 2-20/PT - 3260067

Insertion bridge, pitch: 20 mm, length: 64.5 mm, width: 35.3 mm, number of positions: 2, color: red

Insertion bridge - EB 3-20/PT - 3260068

Insertion bridge, pitch: 20 mm, length: 64.5 mm, width: 55.3 mm, number of positions: 3, color: red

Insulating sleeve

Insulating sleeve - PS-IH RD - 0311579

Insulating sleeve, color: red

Insulating sleeve - MPS-IH WH - 0201663

Insulating sleeve, color: white

Insulating sleeve - MPS-IH RD - 0201676

Insulating sleeve, color: red

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Insulating sleeve - MPS-IH BU - 0201689

Insulating sleeve, color: blue

Insulating sleeve - MPS-IH YE - 0201692

Insulating sleeve, color: yellow

Insulating sleeve - MPS-IH GN - 0201702

Insulating sleeve, color: green

Insulating sleeve - MPS-IH GY - 0201728

Insulating sleeve, color: gray

Insulating sleeve - MPS-IH BK - 0201731

Insulating sleeve, color: black

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Insulating sleeve - MPS-IH WH - 0201663

Insulating sleeve, color: white

Insulating sleeve - MPS-IH RD - 0201676

Insulating sleeve, color: red

Insulating sleeve - MPS-IH BU - 0201689

Insulating sleeve, color: blue

Insulating sleeve - MPS-IH YE - 0201692

Insulating sleeve, color: yellow

Insulating sleeve - MPS-IH GN - 0201702

Insulating sleeve, color: green

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Insulating sleeve - MPS-IH GY - 0201728

Insulating sleeve, color: gray

Insulating sleeve - MPS-IH BK - 0201731

Insulating sleeve, color: black

Labeled terminal marker

Marker for terminal blocks - TMT 10 R CUS - 0824500

Marker for terminal blocks, can be ordered: by line, white, labeled according to customer specifications, mounting type: snap into universal marker groove, snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: 6.35 x 10.15 mm

Zack marker strip - ZB 10 CUS - 0824941

Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 10.15 x 10.5 mm, Number of individual labels: 10

Zack marker strip - ZB10,LGS:FORTL.ZAHLEN - 1053014

Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 10.15 x 10.5 mm, Number of individual labels: 10

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Zack marker strip - ZB10,QR:FORTL.ZAHLEN - 1053027

Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 10.15 x 10.5 mm, Number of individual labels: 10

Marker for terminal blocks - ZB10,LGS:L1-N,PE - 1053412

Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 10.15 x 10.5 mm, Number of individual labels: 10

Marker for terminal blocks - ZB10,LGS:U-N - 1053438

Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: U, V, W, N, GND, U, V, W, N, GND, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 10.15 x 10.5 mm, Number of individual labels: 10

Marker for terminal blocks - UC-TM 10 CUS - 0824605

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

Marker for terminal blocks - UCT-TM 10 CUS - 0829623

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Zack Marker strip, flat - ZBF10 CUS - 0825031

Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF10,LGS:FORTL.ZAHLEN - 0810009

Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into flat marker groove, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF10,QR:FORTL.ZAHLEN - 0810025

Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into flat marker groove, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

Marker for terminal blocks - UC-TMF 10 CUS - 0824662

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 5.1 mm, Number of individual labels: 48

Marker for terminal blocks - UCT-TMF 10 CUS - 0829679

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: 9.4 x 4.7 mm, Number of individual labels: 36

Pick-off terminal block

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Pick-off terminal block - AGK 10-PTPOWER - 3260145

Pick-off terminal block, For use with PTPOWER 50, 95, 150, and 185 Power-Turn high-current terminal blocks, nom. voltage: 1500 V, nominal current: 57 A, connection method: Push-in connection, number of connections: 2, cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, width: 18.5 mm, height: 34.7 mm, color: gray, mounting type: on base element

Pick-off terminal block - AGK 10-PTPOWER BU - 3260148

Pick-off terminal block, For use with PTPOWER 50, 95, 150, and 185 Power-Turn high-current terminal blocks, nom. voltage: 1500 V, nominal current: 57 A, connection method: Push-in connection, number of connections: 2, cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, width: 18.5 mm, height: 34.7 mm, color: blue, mounting type: on base element

Pick-off terminal block - AGK 10-PTPOWER GN/YE - 3260151

Pick-off terminal block, For use with PTPOWER 50, 95, 150, and 185 Power-Turn high-current terminal blocks, nom. voltage: 1500 V, nominal current: 57 A, connection method: Push-in connection, number of connections: 2, cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, width: 18.5 mm, height: 34.7 mm, color: green/yellow, mounting type: on base element

Pick-off terminal block - AGK 10-PTPOWER BK/YE - 3260154

Pick-off terminal block, For use with PTPOWER 50, 95, 150, and 185 Power-Turn high-current terminal blocks, nom. voltage: 1500 V, nominal current: 57 A, connection method: Push-in connection, number of connections: 2, cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, width: 18.5 mm, height: 34.7 mm, color: black/yellow, mounting type: on base element

Planning and marking software

Software - CLIP-PROJECT ADVANCED - 5146040

Multilingual software for convenient configuration of Phoenix Contact products on standard DIN rails.

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Software - CLIP-PROJECT PROFESSIONAL - 5146053

Multilingual software for terminal strip configuration. A marking module enables the professional marking of markers and labels for identifying terminal blocks, conductors and cables, and devices.

Screwdriver tools

Screwdriver - SZF 3-1,0X5,5 - 1206612

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 1.0 x 5.5 x 150 mm, 2-component grip, with non-slip grip

---

Terminal marking

Marker for terminal blocks - TMT 10 R - 0816210

Marker for terminal blocks, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK S1.1, perforated, mounting type: snap into universal marker groove, snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: 6.35 x 10.15 mm, Number of individual labels: 10000

Zack marker strip - ZB 10:UNBEDRUCKT - 1053001

Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 10.5 x 10.15 mm, Number of individual labels: 10

Marker for terminal blocks - UC-TM 10 - 0818069

Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARKIDCOLOR, BLUEMARKID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Marker for terminal blocks - UCT-TM 10 - 0829142

Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARKNEO, TOPMARK LASER, BLUEMARKIDCOLOR, BLUEMARKID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36

Zack Marker strip, flat - ZBF10:UNBEDRUCKT - 0809997

Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snap into flat marker groove, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

Marker for terminal blocks - UC-TMF 10 - 0818124

Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARKIDCOLOR, BLUEMARKID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 5.1 mm, Number of individual labels: 48

Marker for terminal blocks - UCT-TMF 10 - 0829204

Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARKNEO, TOPMARK LASER, BLUEMARKIDCOLOR, BLUEMARKID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: 9.4 x 4.7 mm, Number of individual labels: 36

Test plug terminal block

Test plugs - PS-MT - 0311647

Test plugs, color: silver

High-current terminal block - PTPOWER 50-3L - 3260053

Accessories

Test plugs - MPS-MT - 0201744

Test plugs, with solder connection up to 1 mm² conductor cross section, color: gray

Test plugs - MPS-MT/ 4MM - 3048577

Test plugs, with solder connection up to 1 mm² conductor cross section, color: silver

Warning label printed

Cover - CEC PTPOWER 35/50 - 1056086

Cover, yellow, labeled: Lightning flash, mounting type: plug in

Phoenix Contact 2021 © - all rights reserved
http://www.phoenixcontact.com