

EPITAXIAL-BASE N-P-N & P-N-P POWER TYPES

$I_C$  to 15 A ...  $P_T$  to 200 W ...  $V_{CE}$  to 125 V

$I_C = -3.5$ max. $P_T = 10$ W max. (TO-39)	$I_C = 6$ A max. $P_T = 40$ W max. (TO-66)**	$I_C = -6$ A max. $P_T = 40$ W max. (TO-66)**	$I_C = 7$ A max. $P_T = 40$ W max. VERSAWATT (TO-220)	$I_C = -7$ A max. $P_T = 40$ W max. VERSAWATT (TO-220)	$I_C = 15$ A max. $P_T = 125$ W max. (TO-3)	$I_C = -15$ A max. $P_T = 125$ W max. (TO-3)	$I_C = 15$ A max. $P_T = 75$ W max. VERSAWATT (TO-220)	$I_C = -15$ A max. $P_T = 75$ W max. VERSAWATT (TO-220)
90 x 90 <sup>A</sup>	90 x 90	90 x 90	90 x 90	90 x 90	150 x 150	150 x 150	150 x 150	150 x 150
Family Designation								
2N5781 [P-N-P]	2N6372 [N-P-N]	2N5954 [P-N-P]	2N6292 [N-P-N]	2N6107 [P-N-P]	2N6472 [N-P-N]	2N6248 [P-N-P]	2N6488 [N-P-N]	2N6491 [P-N-P]
<b>2N5783</b> $V_{CE}(SUS) = -45$ V $h_{FE} = 20-100$ @ -1.6 A $f_T = 8$ MHz min.  CT File No. 413E	<b>2N6374</b> $V_{CE}(SUS) = 45$ V $h_{FE} = 20-100$ @ 3 A $f_T = 4$ MHz min.	<b>2N5956</b> $V_{CE}(SUS) = -45$ V $h_{FE} = 20-100$ @ -3 A $f_T = 5$ MHz min.	<b>2N6288</b> <b>2N6289</b> $V_{CE}(SUS) = 40$ V $h_{FE} = 30-150$ @ 3 A $f_T = 4$ MHz min.	<b>2N6110</b> <b>2N6111</b> $V_{CE}(SUS) = -40$ V $h_{FE} = 30-150$ @ -3 A $f_T = 10$ MHz min.	<b>2N6470</b> $V_{CE}(SUS) = 45$ V $h_{FE} = 20-150$ @ 5 A $f_T = 5$ MHz typ.	<b>2N6469</b> $V_{CE}(SUS) = -45$ V $h_{FE} = 20-150$ @ -5 A $f_T = 6$ MHz min.	<b>2N6486</b> $V_{CE}(SUS) = 50$ V $h_{FE} = 20-150$ @ 5 A $f_T = 5$ MHz typ.	<b>2N6489</b> $V_{CE}(SUS) = -50$ V $h_{FE} = 20-150$ @ -5 A $f_T = 5$ MHz typ.
<b>2N5782</b> $V_{CE}(SUS) = -65$ V $h_{FE} = 20-100$ @ -1.2 A $f_T = 8$ MHz min.  CT 413E	<b>2N6373</b> $V_{CE}(SUS) = 65$ V $h_{FE} = 20-100$ @ 2.5 A $f_T = 4$ MHz min.	<b>2N5955</b> $V_{CE}(SUS) = -65$ V $h_{FE} = 20-100$ @ -2.5 A $f_T = 5$ MHz min.	<b>2N6290</b> <b>2N6291</b> $V_{CE}(SUS) = 60$ V $h_{FE} = 30-150$ @ 2.5 A $f_T = 4$ MHz min.	<b>2N6108</b> <b>2N6109</b> $V_{CE}(SUS) = -60$ V $h_{FE} = 30-150$ @ -2.5 A $f_T = 10$ MHz min.	<b>2N6471</b> $V_{CE}(SUS) = 65$ V $h_{FE} = 20-150$ @ 5 A $f_T = 5$ MHz typ.	<b>2N6246</b> $V_{CE}(SUS) = -65$ V $h_{FE} = 20-150$ @ -5 A $f_T = 6$ MHz min.	<b>2N6487</b> $V_{CE}(SUS) = 70$ V $h_{FE} = 20-150$ @ 5 A $f_T = 5$ MHz typ.	<b>2N6490</b> $V_{CE}(SUS) = -70$ V $h_{FE} = 20-150$ @ -5 A $f_T = 5$ MHz typ.
<b>2N5781</b> $V_{CE}(SUS) = -80$ V $h_{FE} = 20-100$ @ -1 A $f_T = 8$ MHz min.  CT 413E	<b>2N6372</b> $V_{CE}(SUS) = 85$ V $h_{FE} = 20-100$ @ 2 A $f_T = 4$ MHz min.	<b>2N5954</b> $V_{CE}(SUS) = -85$ V $h_{FE} = 20-100$ @ -2 A $f_T = 5$ MHz min.	<b>2N6292</b> <b>2N6293</b> $V_{CE}(SUS) = 80$ V $h_{FE} = 30-150$ @ 2 A $f_T = 4$ MHz min.	<b>2N6106</b> <b>2N6107</b> $V_{CE}(SUS) = -80$ V $h_{FE} = 30-150$ @ -2 A $f_T = 10$ MHz min.	<b>2N6472</b> $V_{CE}(SUS) = 85$ V $h_{FE} = 20-150$ @ 5 A $f_T = 5$ MHz typ.	<b>2N6247</b> $V_{CE}(SUS) = -85$ V $h_{FE} = 20-150$ @ 5 A $f_T = 6$ MHz min.	<b>2N6488</b> $V_{CE}(SUS) = 90$ V $h_{FE} = 20-150$ @ 5 A $f_T = 5$ MHz typ.	<b>2N6491</b> $V_{CE}(SUS) = -90$ V $h_{FE} = 20-150$ @ -5 A $f_T = 5$ MHz typ.
			<b>2N6473</b> $V_{CE}(SUS) = 110$ V $h_{FE} = 30-150$ @ 1.5 A $f_T = 5$ MHz typ.  676	<b>2N6475</b> $V_{CE}(SUS) = 110$ V $h_{FE} = 30-150$ @ -1.5 A $f_T = 5$ MHz typ.  676		<b>2N6248</b> $V_{CE}(SUS) = -105$ V $h_{FE} = 20-100$ @ -5 A $f_T = 6$ MHz min. CT 677		
			<b>2N6474</b> $V_{CE}(SUS) = 130$ V $h_{FE} = 30-150$ @ 1 A $f_T = 5$ MHz typ.  676	<b>2N6476</b> $V_{CE}(SUS) = 130$ V $h_{FE} = 30-150$ @ -1 A $f_T = 5$ MHz typ.  676				

<sup>A</sup>Pellet size—values shown are edge dimensions in thousands-of-an-inch (mils).

\*\*Available with free-air radiator  $R\theta_{JA} = 30^\circ$  C/W

"TA" designations (e.g. TA8662) in this booklet are Developmental-type devices.

File No. (e.g. File No. 413E), where shown, relates to the data bulletin.

CT—Complementary Type available, see matrix on Complementary-Pair Power Types.

## COMPLEMENTARY-PAIR POWER TYPES

### Hometaxial-Base/Epitaxial-Base

$I_c = 1.5 \text{ to } 2 \text{ A}$		$I_c = 2.5 \text{ A}$		$I_c = 3 \text{ to } 3.5 \text{ A}$		$I_c = 4 \text{ to } 6 \text{ A}$		$I_c = 12 \text{ to } 17 \text{ A}$	
N-P-N	P-N-P	N-P-N	P-N-P	N-P-N	P-N-P	N-P-N	P-N-P	N-P-N	P-N-P
<b>2N5293</b> <b>2N5294</b> $V_{CE(SUS)} = 75 \text{ V}$ $I_c = 1.5 \text{ A}$ VERSAWATT (TO-220) File No. 322	<b>2N6106</b> <b>2N6107</b> $V_{CE(SUS)} = -80 \text{ V}$ $I_c = -1.5 \text{ A}$ VERSAWATT (TO-220) File No. 676	<b>2N5786</b> $V_{CE(SUS)} = 45 \text{ V}$ $I_c = 2.5 \text{ A}$ (TO-39) File No. 413E	<b>2N5783</b> $V_{CE(SUS)} = -45 \text{ V}$ $I_c = -2.5 \text{ A}$ (TO-39) 413E	<b>2N3054</b> $V_{CE(SUS)} = 60 \text{ V}$ $I_c = 3 \text{ A}$ (TO-66) File No. 527	<b>2N5955</b> $V_{CE(SUS)} = -65 \text{ V}$ $I_c = -3 \text{ A}$ (TO-66) 675	<b>2N5495</b> <b>2N5494</b> $V_{CE(SUS)} = 50 \text{ V}$ $I_c = 4 \text{ A}$ VERSAWATT (TO-220) File No. 353	<b>2N6110</b> <b>2N6111</b> $V_{CE(SUS)} = -40 \text{ V}$ $I_c = -4 \text{ A}$ VERSAWATT (TO-220) File No. 676	<b>2N3055</b> $V_{CE(SUS)} = 70 \text{ V}$ $I_c = 12 \text{ A}$ (TO-3) File No. 524	<b>2N6247</b> $V_{CE(SUS)} = -90 \text{ V}$ $I_c = -12 \text{ A}$ (TO-3) File No. 677
<b>2N5295</b> <b>2N5296</b> $V_{CE(SUS)} = 50 \text{ V}$ $I_c = 2 \text{ A}$ VERSAWATT (TO-220) 322	<b>2N6106</b> <b>2N6107</b> $V_{CE(SUS)} = -80 \text{ V}$ $I_c = -2 \text{ A}$ VERSAWATT (TO-220) 676	<b>2N5297</b> <b>2N5298</b> $V_{CE(SUS)} = 70 \text{ V}$ $I_c = 2.5 \text{ A}$ VERSAWATT (TO-220) 322	<b>2N6106</b> <b>2N6107</b> $V_{CE(SUS)} = -80 \text{ V}$ $I_c = -2.5 \text{ A}$ VERSAWATT (TO-220) 676	<b>2N5491</b> <b>2N5490</b> $V_{CE(SUS)} = 50 \text{ V}$ $I_c = 3 \text{ A}$ VERSAWATT (TO-220) 353	<b>2N6106</b> <b>2N6107</b> $V_{CE(SUS)} = -80 \text{ V}$ $I_c = -3 \text{ A}$ VERSAWATT (TO-220) 676	<b>2N4347</b> $V_{CE(SUS)} = 140 \text{ V}$ $I_c = 4 \text{ A}$ (TO-3) 528	<b>2N5954</b> $V_{CE(SUS)} = -85 \text{ V}$ $I_c = -4 \text{ A}$ (TO-66) 675	<b>2N4348</b> $V_{CE(SUS)} = 140 \text{ V}$ $I_c = 14 \text{ A}$ (TO-3) 526	<b>2N6248</b> $V_{CE(SUS)} = -110 \text{ V}$ $I_c = -14 \text{ A}$ (TO-3) 677
<b>2N3441</b> $V_{CE(SUS)} = 150 \text{ V}$ $I_c = 2 \text{ A}$ (TO-66) 529	<b>(2N6468)†</b> $V_{CE(SUS)} = -125 \text{ V}$ $I_c = -2 \text{ A}$ (TO-66)	<b>2N5785</b> $V_{CE(SUS)} = 65 \text{ V}$ $I_c = 2.5 \text{ A}$ (TO-39) 413 E	<b>2N5782</b> $V_{CE(SUS)} = -65 \text{ V}$ $I_c = -2.5 \text{ A}$ (TO-39) 413 E	<b>40250</b> $V_{CE(SUS)} = 90 \text{ V}$ $I_c = 3.5 \text{ A}$ (TO-66) 112	<b>2N5956</b> $V_{CE(SUS)} = -45 \text{ V}$ $I_c = -3.5 \text{ A}$ (TO-66) 435	<b>2N6371</b> $V_{CE(SUS)} = 50 \text{ V}$ $I_c = 6 \text{ A}$ (TO-3) 607	<b>2N5956</b> $V_{CE(SUS)} = -45 \text{ V}$ $I_c = -6 \text{ A}$ (TO-66) 675	<b>2N3772</b> $V_{CE(SUS)} = 70 \text{ V}$ $I_c = 17 \text{ A}$ (TO-3) 525	<b>2N6247</b> $V_{CE(SUS)} = -90 \text{ V}$ $I_c = -17 \text{ A}$ (TO-3) 677
		<b>2N5784</b> $V_{CE(SUS)} = 80 \text{ V}$ $I_c = 2.5 \text{ A}$ (TO-39) 413 E	<b>2N5781</b> $V_{CE(SUS)} = -80 \text{ V}$ $I_c = -2.5 \text{ A}$ (TO-39) 413 E	<b>2N5493</b> <b>2N5492</b> $V_{CE(SUS)} = 65 \text{ V}$ $I_c = 3.5 \text{ A}$ VERSAWATT (TO-220) 353	<b>2N6108</b> <b>2N6109</b> $V_{CE(SUS)} = -60 \text{ V}$ $I_c = -3.5 \text{ A}$ VERSAWATT (TO-220) 676	<b>2N3055</b> $V_{CE(SUS)} = 70 \text{ V}$ $I_c = 6 \text{ A}$ (TO-3) 524	<b>2N5955</b> $V_{CE(SUS)} = -65 \text{ V}$ $I_c = -6 \text{ A}$ (TO-66) 675	* Or higher voltage type 2N6248.	

### High-Voltage

$I_c = 0.2 \text{ A}$		$I_c = 2 \text{ A}$	
N-P-N	P-N-P	N-P-N	P-N-P
<b>2N3440</b> $V_{CE(SUS)} = 250 \text{ V}$ $I_c = 0.2 \text{ A}$ (TO-39) File No. 64E	<b>2N5415</b> $V_{CE(SUS)} = -200 \text{ V}$ $I_c = -0.2 \text{ A}$ (TO-39) File No. 336E	<b>2N3584</b> $V_{CE(SUS)} = 350 \text{ V}$ $I_c = 2 \text{ A}$ (TO-66) File No. 138	<b>2N6212</b> $V_{CE(SUS)} = -325 \text{ V}$ $I_c = -2 \text{ A}$ (TO-66) File No. 507
<b>2N6175</b> $V_{CE(SUS)} = 300 \text{ V}$ $I_c = 0.2 \text{ A}$ (Plastic TO-5) 508 E	<b>BFT19A</b> $V_{CE(SUS)} = -300 \text{ V}$ $I_c = -0.2 \text{ A}$ (TO-39) 683	<b>2N3585</b> $V_{CE(SUS)} = 400 \text{ V}$ $I_c = 2 \text{ A}$ (TO-66) 138	<b>2N6213</b> $V_{CE(SUS)} = -375 \text{ V}$ $I_c = -2 \text{ A}$ (TO-66) 507
<b>2N3439</b> $V_{CE(SUS)} = 350 \text{ V}$ $I_c = 0.2 \text{ A}$ (TO-39) 64 E	<b>2N5416</b> $V_{CE(SUS)} = -350 \text{ V}$ $I_c = -0.2 \text{ A}$ (TO-39) 336	<b>BUX67</b> $V_{CE(SUS)} = 175 \text{ V}$ $I_c = 2 \text{ A}$ (TO-66) 871	<b>BUX66</b> $V_{CE(SUS)} = -175 \text{ V}$ $I_c = -2 \text{ A}$ (TO-66) 870
<b>2N6176</b> $V_{CE(SUS)} = 350 \text{ V}$ $I_c = 0.2 \text{ A}$ (Plastic TO-5) 508 E	<b>BFT19B</b> $V_{CE(SUS)} = -400 \text{ V}$ $I_c = -0.2 \text{ A}$ (TO-39) 683	<b>BUX67A</b> $V_{CE(SUS)} = 275 \text{ V}$ $I_c = 2 \text{ A}$ (TO-66) 871	<b>BUX66A</b> $V_{CE(SUS)} = -275 \text{ V}$ $I_c = -2 \text{ A}$ (TO-66) 870
		<b>BUX67B</b> $V_{CE(SUS)} = 350 \text{ V}$ $I_c = 2 \text{ A}$ (TO-66) 871	<b>BUX66B</b> $V_{CE(SUS)} = -350 \text{ V}$ $I_c = -2 \text{ A}$ (TO-66) 870
		<b>BUX67C</b> $V_{CE(SUS)} = 400 \text{ V}$ $I_c = 2 \text{ A}$ (TO-66) 871	<b>BUX66C</b> $V_{CE(SUS)} = -400 \text{ V}$ $I_c = -2 \text{ A}$ (TO-66) 870

Note: The collector current ( $I_c$ ) value shown is for  $h_{FE}$  of 10 min.

### High-Speed

$I_c = 1 \text{ A}$		$I_c = 1 \text{ A}$	
N-P-N	P-N-P	N-P-N	P-N-P
<b>2N3053</b> $V_{CE(SUS)} = 50 \text{ V}$ $I_c = 1 \text{ A}$ (TO-39) File No. 432 E	<b>2N4037</b> $V_{CE(SUS)} = -60 \text{ V}$ $I_c = -1 \text{ A}$ (TO-39) File No. 216E	<b>2N6179</b> $V_{CE(SUS)} = 65 \text{ V}$ $I_c = 1 \text{ A}$ (Plastic TO-5) File No. 562	<b>2N6181</b> $V_{CE(SUS)} = -65 \text{ V}$ $I_c = -1 \text{ A}$ (Plastic TO-5) 562
<b>2N2102</b> $V_{CE(SUS)} = 80 \text{ V}$ $I_c = 1 \text{ A}$ (TO-39) 106 E	<b>2N4036</b> $V_{CE(SUS)} = -85 \text{ V}$ $I_c = -1 \text{ A}$ (TO-39) 216 E	<b>2N6178</b> $V_{CE(SUS)} = 90 \text{ V}$ $I_c = 1 \text{ A}$ (Plastic TO-5) 562	<b>2N6180</b> $V_{CE(SUS)} = -90 \text{ V}$ $I_c = -1 \text{ A}$ (Plastic TO-5) 562
<b>2N5321</b> $V_{CE(SUS)} = 65 \text{ V}$ $I_c = 1 \text{ A}$ (TO-39) 325 E	<b>2N5323</b> $V_{CE(SUS)} = -65 \text{ V}$ $I_c = -1 \text{ A}$ (TO-39) 325 E		
<b>2N5320</b> $V_{CE(SUS)} = 90 \text{ V}$ $I_c = 1 \text{ A}$ (TO-39) 325 E	<b>2N5322</b> $V_{CE(SUS)} = -90 \text{ V}$ $I_c = -1 \text{ A}$ (TO-39) 325 E		

File No. (e.g. File No. 322), where shown, relates to data bulletin.  
See Epitaxial-Base and Monolithic Darlington Matrices for additional Complementary-Pair Power Types.

### 2N5786 FAMILY [n-p-n] (silicon) [cont'd]

$f_T = 1 \text{ MHz min}; P_T = 10 \text{ W max}$


#### DESCRIPTION

#### AUDIO TYPES

- 40610 Output, 3-W Audio Ampli.
- 40615 Output, 5-W Audio Ampli.
- 40620 Output, 7-W Audio Ampli.

$V_{CE0(sus)}$ V	$V_{CER(sus)}$ V	$V_{CEV(sus)}$ V		$h_{FE}$		$I_{CER-mA}$			$V_{CE(sat)-V}$			$V_{BE-V}$	
				$I_C$ A	$V_{CE}$ V	Temp. $^{\circ}C$ 25	150	$V_{CE}$ V	$I_C$ A	$I_B$ A	$I_C$ A		
25	—	—	20-100	1.2	1	1▲	—	25	—	—	—	—	—
30	—	—	20-100	1.2	1	1▲	—	25	—	—	—	—	—
32	—	—	20-100	1.5	1	1▲	—	25	—	—	—	—	—

▲ $I_{CER} - \mu A$



### 2N5840 FAMILY [n-p-n] (silicon)

$f_T = 5 \text{ MHz min}; P_T = 100 \text{ W max}$

#### 2N TYPES

- 2N5838 High Voltage, Fast Switch
- 2N5839 High Voltage, Fast Switch
- 2N5840 High Voltage, Fast Switch

250	275	275	8-40	3	2	5●	8■	265	1	3	0.375	2	3
275	300	300	10-50	2	3	2●	5■	290	1.5	2	0.2	2	2
350	375	375	10-50	2	3	2●	5■	360	1.5	2	0.2	2	2

#### AUDIO TYPES

- 41016 Output, 70-W Amplifier


100	120	—	10-50	4	4	1	—	90	2	4	0.8	2	4
-----	-----	---	-------	---	---	---	---	----	---	---	-----	---	---

#### OTHER TYPES

- 410 † High Voltage, Inverter Applications
- 411 † High Voltage, Inverter Applications
- 413 † High Voltage, Inverter Applications
- 423 † High Voltage, Inverter Applications
- 431 † High Voltage, Inverter Applications
- 40852 Off-Line Switching-Regulator for Power Supplies

200	—	—	30-90	1	5	0.25*	0.5▲	200	0.8	1	0.1	1.5	1
300	—	—	30-90	1	5	0.25	0.5▲	300	0.8	1	0.1	1.5	1
325	—	—	20-80	0.5	5	0.25	0.5▲	400	0.8	0.5	0.05	1.5	0.5
325	—	—	30-90	1	5	0.25	0.5▲	400	0.8	1	0.1	1.5	1
325	—	—	15-35	2.5	5	2.5	5▲	400	0.7	2.5	0.5	1.5	2.5
350	375	—	12 min.	1.2	1	0.5●	5▲	450	3	4	0.8	2	4

● $I_{CEV}$  ■ $I_{CEV}$  @ 100°C \* $I_{CEO}$  ▲ $I_{CEV}$  @ 125°C † Not recommended as replacement types.

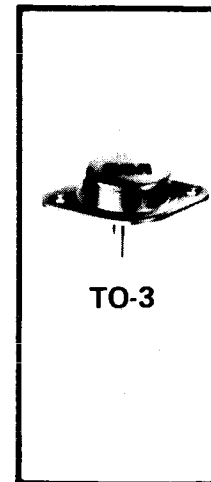

### 2N5954 FAMILY [p-n-p] (silicon)

$f_T = 5 \text{ MHz min}; P_T = 40 \text{ W max}$

#### 2N TYPES

- 2N5956 General Purpose, Medium Power
- 2N5955 General Purpose, Medium Power
- 2N5954 General Purpose, Medium Power

-40	-45	-50▲	20-100	-3	-4	-100●		-35	-1	-3	-0.3	-2	-3
-60	-65	-70▲	20-100	-2.5	-4	-100●		-55	-1	-2.5	-0.25	-2	-2.5
-80	-85	-90▲	20-100	-2	-4	-100●		-75	-1	-2	-0.2	-2	-2

▲ $V_{CEX(sus)}$

● $I_{CER} - \mu A$

