

500 mW DO-35 Hermetically Sealed Glass Fast Switching Diodes

Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Value	Units
P_D	Power Dissipation	500	mW
T_{STG}	Storage Temperature Range	-65 to +200	°C
T_J	Operating Junction Temperature	+175	°C
W_{IV}	Working Inverse Voltage	75	V
I_o	Average Rectified Current	150	mA
I_{FM}	Non-repetitive Peak Forward Current	450	mA
I_{FSURGE}	Peak Forward Surge Current	2	A



These ratings are limiting values above which the serviceability of the diode may be impaired.

Specification Features:

- Fast Switching Device ($T_{RR} < 4.0 \text{ nS}$)
- DO-35 Package (JEDEC)
- Through-Hole Device Type Mounting
- Hermetically Sealed Glass
- Compression Bonded Construction
- All external surfaces are corrosion resistant and leads are readily solderable
- Cathode indicated by polarity band



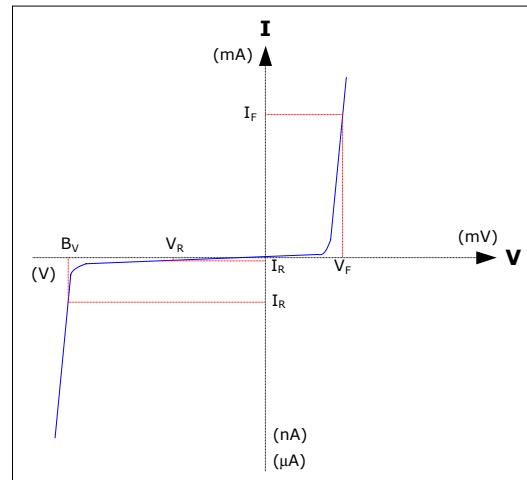
ELECTRICAL SYMBOL

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Test Condition	Limits		Unit
			Min	Max	
B_V	Breakdown Voltage	$I_R=100\mu\text{A}$ $I_R=5\mu\text{A}$	100		Volts
I_R	Reverse Leakage Current	$V_R=20\text{V}$ $V_R=75\text{V}$		25 5	nA μA
V_F	Forward Voltage TC1N4448, TC1N914B TC1N4148 TC1N4448, TC1N914B	$I_F=5\text{mA}$	0.62	0.72	Volts
		$I_F=10\text{mA}$		1.0	
		$I_F=100\text{mA}$		1.0	
T_{RR}	Reverse Recovery Time	$I_F=I_R=10\text{mA}$ $R_L=100\Omega$ $I_{RR}=1\text{mA}$		4	nS
C	Capacitance	$V_R=0\text{V}, f=1\text{MHz}$		4	pF

Electrical Symbol Definition

Symbol	Parameter
B_V	Breakdown Voltage @ I_R
I_R	Reverse Leakage Current @ V_R
V_R	Reverse Voltage
I_F	Forward Current
V_F	Forward Voltage @ I_F

Typical Characteristics

Ordering Information

Device	Package	Quantity
TC1NXXX	Bulk	10,000
TC1NXXX	Tape and Ammo	5,000
TC1NXXX	Tape and Reel	10,000
TC1NXXX	Others (...contact Tak Cheong sales representatives)	

Axial-Lead Tape Packaging Standards

This axial-lead component's packaging requirements use in automatic testing and assembly equipment. And this standard practices for lead-tape packaging of axial-lead components meets the requirements of EIA Standard RS-296-D "Lead-taping of Components on Axial Lead Configuration for Automatic Insertion".