



**Features**

- Small plastic SMD package
- High switching speed: max.4ns
- Continuous reverse voltage: max.100V
- Repetitive peak reverse voltage: max.100V
- Repetitive peak forward current: max.500mA



**Schematic Diagram**

**Absolute Maximum Ratings** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

Characteristic	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$	100	V
Continuous Reverse Voltage	$V_R$	100	V
Continuous Forward Current	$I_F$	250	mA
Repetitive Peak Forward Current	$I_{FRM}$	500	mA
Non-Repetitive Peak Forward Current	$I_{FSM}$	t=1 $\mu$ s	4
		t=1ms	1
		t=1s	0.5
Power Dissipation	$P_D$	400	mW
Junction and Storage Temperature Range	$T_J, T_{STG}$	-65 to +150	$^{\circ}\text{C}$

**Electrical Characteristics** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage	$V_{(BR)R}$	100	-	V	$I_R=100\mu\text{A}$
Forward Voltage	$V_F$	-	0.715 0.855 1.0 1.25	V	$I_F=1.0\text{mA}$ $I_F=10\text{mA}$ $I_F=50\text{mA}$ $I_F=150\text{mA}$
Reverse Current	$I_R$	-	1.0 0.03	$\mu\text{A}$	$V_R=75\text{V}$ $V_R=25\text{V}$
Capacitance Between Terminals	$C_T$	-	1.5	pF	$V_R=0, f=1.0\text{MHz}$
Reverse Recovery Time	$t_{rr}$	-	4.0	ns	$I_F=I_R=10\text{mA}, R_L=100\Omega$

**Ratings and Characteristics Curves**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


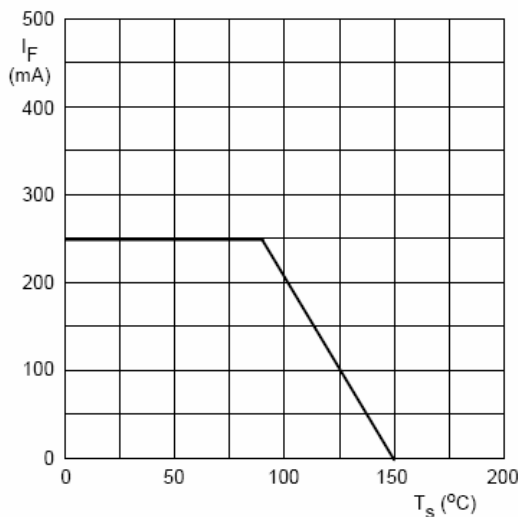


Fig.1 Maximum permissible continuous forward current as a function of soldering point temperature.

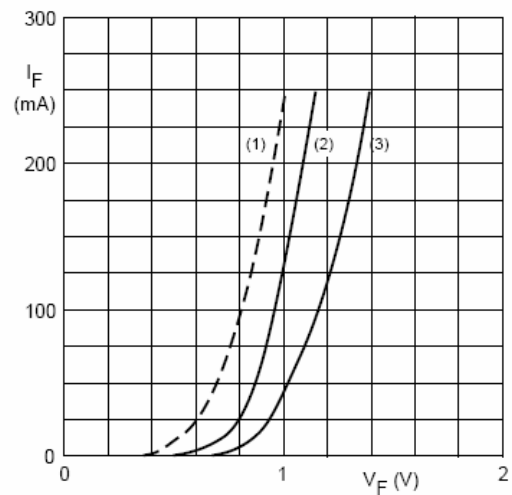

- (1)  $T_j = 150^\circ\text{C}$ ; typical values.
- (2)  $T_j = 25^\circ\text{C}$ ; typical values.
- (3)  $T_j = 25^\circ\text{C}$ ; maximum values.

Fig.2 Forward current as a function of forward voltage.

**Ratings and Characteristics Curves**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


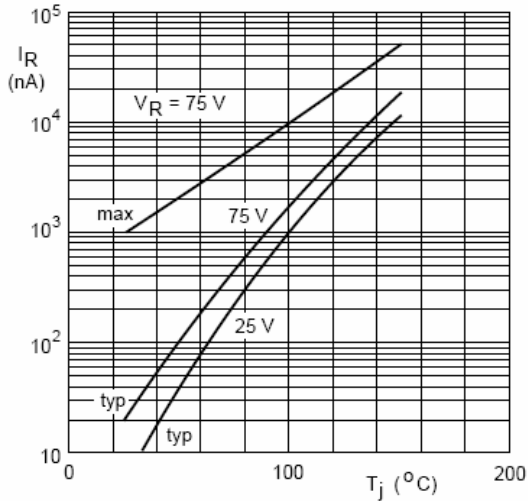


Fig.3 Reverse current as a function of junction temperature.

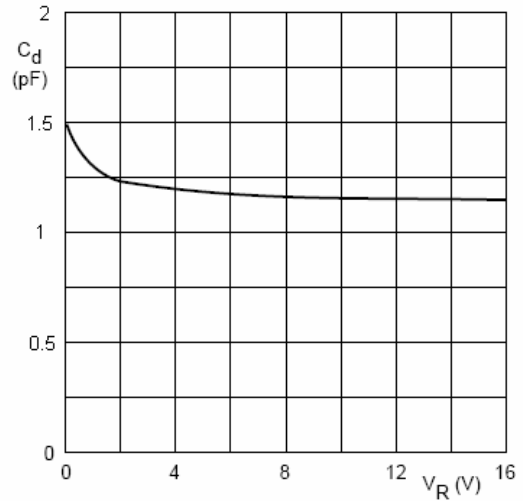


$f = 1 \text{ MHz}; T_j = 25^\circ\text{C}$ .

Fig.4 Diode capacitance as a function of reverse voltage; typical values.

**Package Outline Dimensions**

SOD-323		
Dim	Min	Max
A	1.60	1.80
B	1.20	1.40
C	0.9 Max	
D	0.30 Typical	
E	0.22	0.42
H	0.02	0.1
J	0.1 Typical	
K	2.55	2.75
All Dimensions in mm		

### Soldering Footprint

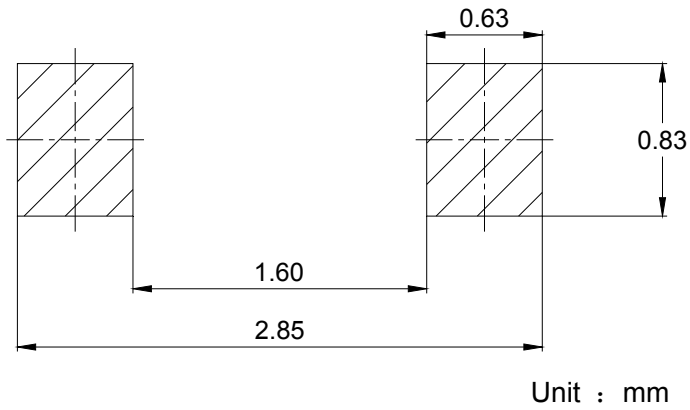

### Ordering Information

Device	Package	Marking	Quantity	HSF Status
BAS316	SOD-323	A6	3000pcs / Reel	RoHS Compliant