

2N5954 2N5955 2N5956 PNP
2N6372 2N6373 2N6374 NPN

**COMPLEMENTARY SILICON
POWER TRANSISTORS**



TO-66 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N5954 and 2N6372 SERIES types are complementary Silicon Power Transistors manufactured by the epitaxial base process, mounted in a hermetically sealed metal case designed for general purpose amplifier and switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^\circ\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Collector-Emitter Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Continuous Base Current
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL	2N5954	2N5955	2N5956	UNITS
	2N6372	2N6373	2N6374	
V_{CBO}	90	70	50	V
V_{CEV}	90	70	50	V
V_{CER}	85	65	45	V
V_{CEO}	80	60	40	V
V_{EBO}		5.0		V
I_C		6.0		A
I_B		2.0		A
P_D		40		W
T_J, T_{stg}		-65 to +200		$^\circ\text{C}$
θ_{JC}		4.3		$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N5954		2N5955		2N5956		UNITS
		2N6372	2N6373	2N6373	2N6374	2N6374		
		MIN	MAX	MIN	MAX	MIN	MAX	
I_{CEV}	$V_{CE}=85\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega$	-	100	-	-	-	-	μA
I_{CEV}	$V_{CE}=65\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega$	-	-	-	100	-	-	μA
I_{CEV}	$V_{CE}=45\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega$	-	-	-	-	-	100	μA
I_{CEV}	$V_{CE}=85\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega, T_C=150^\circ\text{C}$	-	2.0	-	-	-	-	mA
I_{CEV}	$V_{CE}=65\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega, T_C=150^\circ\text{C}$	-	-	-	2.0	-	-	mA
I_{CEV}	$V_{CE}=45\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega, T_C=150^\circ\text{C}$	-	-	-	-	-	2.0	mA
I_{CER}	$V_{CE}=75\text{V}$	-	100	-	-	-	-	μA
I_{CER}	$V_{CE}=55\text{V}$	-	-	-	100	-	-	μA
I_{CER}	$V_{CE}=35\text{V}$	-	-	-	-	-	100	μA
I_{CEO}	$V_{CE}=65\text{V}$	-	1.0	-	-	-	-	mA
I_{CEO}	$V_{CE}=45\text{V}$	-	-	-	1.0	-	-	mA
I_{CEO}	$V_{CE}=25\text{V}$	-	-	-	-	-	1.0	mA
I_{EBO}	$V_{BE}=5.0\text{V}$	-	0.1	-	0.1	-	0.1	mA
BV_{CEV}	$I_C=100\text{mA}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega$	90	-	70	-	50	-	V
BV_{CER}	$I_C=100\text{mA}, R_{BE}=100\Omega$	85	-	65	-	45	-	V
BV_{CEO}	$I_C=100\text{mA}$	80	-	60	-	40	-	V

R1 (24-November 2010)

2N5954 2N5955 2N5956 PNP
 2N6372 2N6373 2N6374 NPN




**COMPLEMENTARY SILICON
 POWER TRANSISTORS**

ELECTRICAL CHARACTERISTICS - Continued: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N5954 2N6372		2N5955 2N6373		2N5956 2N6374		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
$V_{CE(SAT)}$	$I_C=2.0\text{A}, I_B=200\text{mA}$	-	1.0	-	-	-	-	V
$V_{CE(SAT)}$	$I_C=2.5\text{A}, I_B=250\text{mA}$	-	-	-	1.0	-	-	V
$V_{CE(SAT)}$	$I_C=3.0\text{A}, I_B=300\text{mA}$	-	-	-	-	-	1.0	V
$V_{CE(SAT)}$	$I_C=6.0\text{A}, I_B=1.2\text{A}$ (PNP types)	-	2.0	-	2.0	-	2.0	V
$V_{BE(ON)}$	$V_{CE}=4.0\text{V}, I_C=2.0\text{A}$	-	2.0	-	-	-	-	V
$V_{BE(ON)}$	$V_{CE}=4.0\text{V}, I_C=2.5\text{A}$	-	-	-	2.0	-	-	V
$V_{BE(ON)}$	$V_{CE}=4.0\text{V}, I_C=3.0\text{A}$	-	-	-	-	-	2.0	V
$V_{BE(ON)}$	$V_{CE}=4.0\text{V}, I_C=6.0\text{A}$ (NPN types)	-	3.0	-	3.0	-	3.0	V
h_{FE}	$V_{CE}=4.0\text{V}, I_C=2.0\text{A}$	20	100	-	-	-	-	
h_{FE}	$V_{CE}=4.0\text{V}, I_C=2.5\text{A}$	-	-	20	100	-	-	
h_{FE}	$V_{CE}=4.0\text{V}, I_C=3.0\text{A}$	-	-	-	-	20	100	
h_{FE}	$V_{CE}=4.0\text{V}, I_C=6.0\text{A}$	5.0	-	5.0	-	5.0	-	
h_{fe}	$V_{CE}=4.0\text{V}, I_C=0.5\text{A}, f=1.0\text{kHz}$	25	-	25	-	25	-	
f_T	$V_{CE}=4.0\text{V}, I_C=1.0\text{A}, f=1.0\text{MHz}$ (NPN types)	4.0	-	4.0	-	4.0	-	MHz
f_T	$V_{CE}=4.0\text{V}, I_C=1.0\text{A}, f=1.0\text{MHz}$ (PNP types)	5.0	-	5.0	-	5.0	-	MHz

TO-66 CASE - MECHANICAL OUTLINE

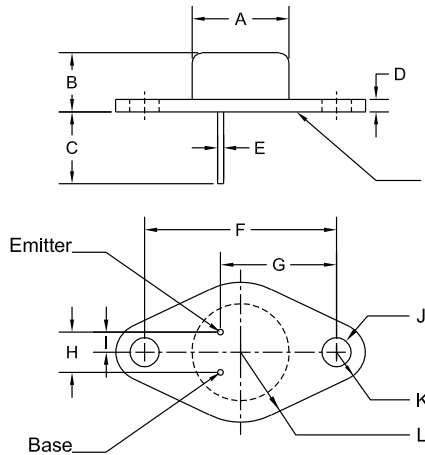

Seating Plane:
 The seating plane must be within 0.001" concave to 0.004" convex within 0.600" diameter from the center of the device.

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
A (DIA)	0.470	0.500	11.94	12.70
B	0.250	0.340	6.35	8.64
C	0.360	-	9.14	-
D	0.050	0.075	1.27	1.91
E (DIA)	0.028	0.034	0.71	0.86
F	0.958	0.962	24.33	24.43
G	0.570	0.590	14.48	14.99
H	0.190	0.210	4.83	5.33
I	0.093	0.107	2.36	2.72
J (DIA)	0.142	0.152	3.61	3.86
K (RAD)	0.145		3.68	
L (RAD)	0.350		8.89	

TO-66 (REV:R2)

**MARKING:
 FULL PART NUMBER**

R2

R1 (24-November 2010)