

500 mW DO-34 Hermetically Sealed Glass Fast Switching Diodes



Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

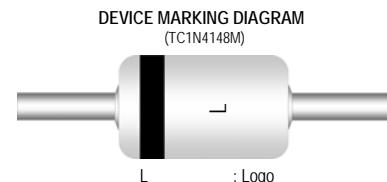
Symbol	Parameter	Value	Units
P_D	Power Dissipation	500	mW
T_{STG}	Storage Temperature Range	-65 to +200	°C
T_J	Operating Junction Temperature	+175	°C
W_{IV}	Working Inverse Voltage	75	V
I_o	Average Rectified Current	150	mA
I_{FM}	Non-repetitive Peak Forward Current	450	mA
I_{FSURGE}	Peak Forward Surge Current	2	A

These ratings are limiting values above which the serviceability of the diode may be impaired.

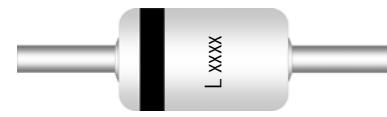
Specification Features:

- Fast Switching Device ($T_{RR} < 4.0 \text{ nS}$)
- DO-34 Package (JEDEC DO-204)
- Through-Hole Device Type Mounting
- Hermetically Sealed Glass
- Compression Bonded Construction
- All external surfaces are corrosion resistant and leads are readily solderable
- Cathode indicated by polarity band

DEVICE MARKING DIAGRAM
(TC1N4148M)



DEVICE MARKING DIAGRAM
(TC1N4448M / TC1N914BM)



L : Logo
Device Code : TC1NxxxxM

Cathode Anode

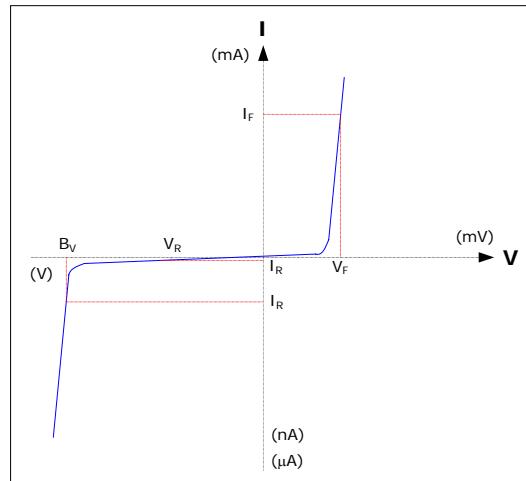
ELECTRICAL SYMBOL

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Test Condition	Limits		Unit
			Min	Max	
B_V	Breakdown Voltage	$I_R=100\mu\text{A}$ $I_R=5\mu\text{A}$	100 75		Volts
I_R	Reverse Leakage Current	$V_R=20\text{V}$ $V_R=75\text{V}$		25 5	nA μA
V_F	Forward Voltage TC1N4448M, TC1N914BM TC1N4148M TC1N4448M, TC1N914BM	$I_F=5\text{mA}$ $I_F=10\text{mA}$ $I_F=100\text{mA}$	0.62 1.0 1.0	0.72 1.0 1.0	Volts
T_{RR}	Reverse Recovery Time	$I_F=10\text{mA}, V_R=6\text{V}$ $R_L=100\Omega$ $I_{RR}=1\text{mA}$		4	nS
C	Capacitance	$V_R=0\text{V}, f=1\text{MHz}$		4	pF

Electrical Symbol Definition

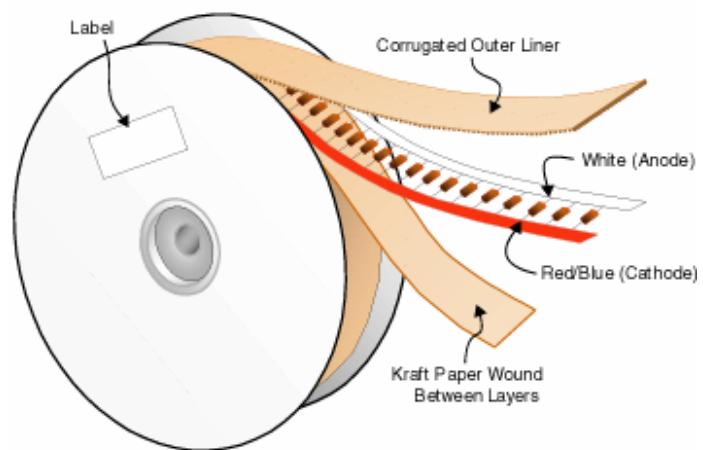
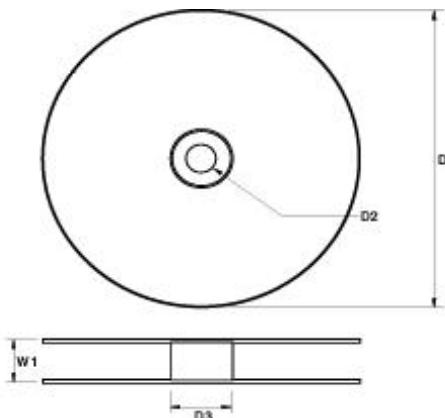
Symbol	Parameter
B_V	Breakdown Voltage @ I_R
I_R	Reverse Leakage Current @ V_R
V_R	Reverse Voltage
I_F	Forward Current
V_F	Forward Voltage @ I_F

Typical Characteristics

Ordering Information

Device	Package	Quantity
TC1NxxxxM	Bulk	10,000
TC1NxxxxM.TB	Tape and Ammo	5,000
TC1NxxxxM.TR	Tape and Reel	10,000
TC1NxxxxM	Others (...contact Tak Cheong sales representatives)	

Axial-Lead Tape Packaging Standards

This axial-lead component's packaging requirements use in automatic testing and assembly equipment. And this standard practices for lead-tape packaging of axial-lead components meets the requirements of EIA Standard RS-296-D "Lead-taping of Components on Axial Lead Configuration for Automatic Insertion".

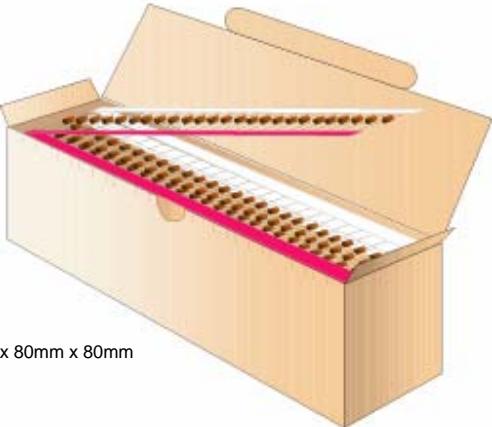
Tape & Reel Packaging Information
Tape & Reel Outline

Reel Dimensions


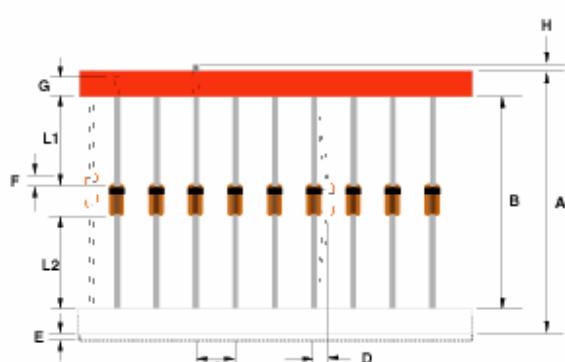
DIM	Millimeters
D1	356
D2	30
D3	84
W1	77.5

Quantity Per Reel

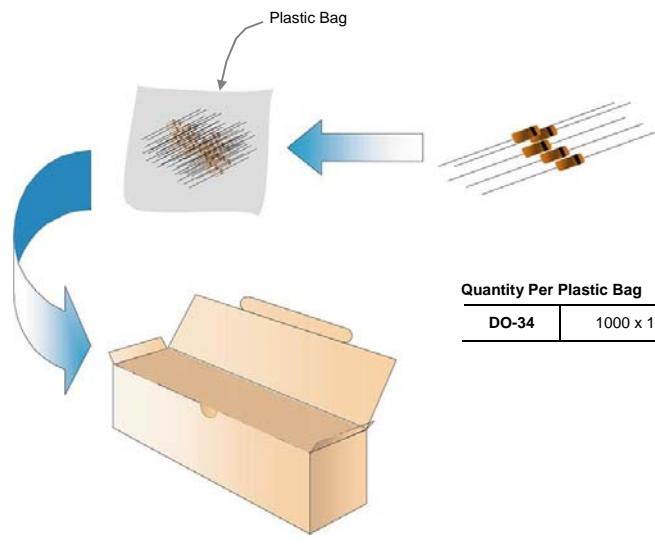
PKG Type	Quantity Per Reel
DO-34	10,000

Tape & Ammo Packaging Information

Tape & Ammo Outline	 250mm x 80mm x 80mm				
Quantity Per Ammo Box	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">PKG Type</th><th style="text-align: center;">Quantity Per Box</th></tr> </thead> <tbody> <tr> <td style="text-align: center;">DO-34</td><td style="text-align: center;">5,000</td></tr> </tbody> </table>	PKG Type	Quantity Per Box	DO-34	5,000
PKG Type	Quantity Per Box				
DO-34	5,000				

Taping Dimensions


Description	Millimeters	
Standard Width	52	26
Tape Spacing (B)	52 ± 0.69	$26 +0.5 / -0$
Component Pitch (C)	5.08 ± 0.4	5.08 ± 0.4
Untaped Lead (L1 - L2)	± 0.69	± 0.69
Glass Offset (F)	± 0.69	± 0.69
Bent (D)	1.2 Max	1.2 Max
Tape Width (G)	6.138 ± 0.576	6.138 ± 0.576
Tape Mismatch (E)	0.55 Max	0.55 Max
Taped Lead (G)	3.2 Min	3.2 Min
Lead Beyond Tape (H)	0	0

Bulk Packaging Information**Bulk Outline****Quantity Per Plastic Bag**

DO-34	1000 x 10 Plastic Bag
-------	-----------------------

Quantity Per Box

PKG Type	Quantity Per Box
DO-34	10,000

Package Outline

Package	Case Outline				
DO-34	DO-34				
	DIM	Millimeters		Inches	
	Min	Max	Min	Max	
	A	0.46	0.55	0.018	0.022
	B	2.16	3.04	0.085	0.120
	C	25.40	38.10	1.000	1.500
	D	1.27	1.90	0.050	0.075

Notes:

1. All dimensions are within JEDEC standard.
2. DO34 polarity denoted by cathode band.