


## Pin Grid Array Adapters

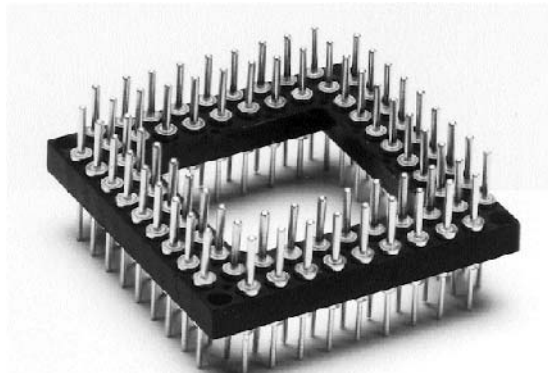

## Standard Quick Turn Terminals

### Features:

- Screw machined terminals.
- Easily customized to fit your application.

### Terminals:

Brass - Copper Alloy (C36000)  
ASTM-B-16

### Plating:

Gold over Nickel or  
Tin-Lead over Nickel



Gold per MIL-G-45204  
Tin-Lead per MIL-P-81728  
Nickel per QQ-N-290


### Body Material:

**HCA** - High Temp. Glass Filled  
Thermoplastic (P.P.S.), U.L. Rated 94V-O,  
-60°C to 260°C (-76°F to 500°F)

**KA** - Polyimide Film, Temperature range  
-269°C to 400°C (-452°F to 752°F)

### How To Order

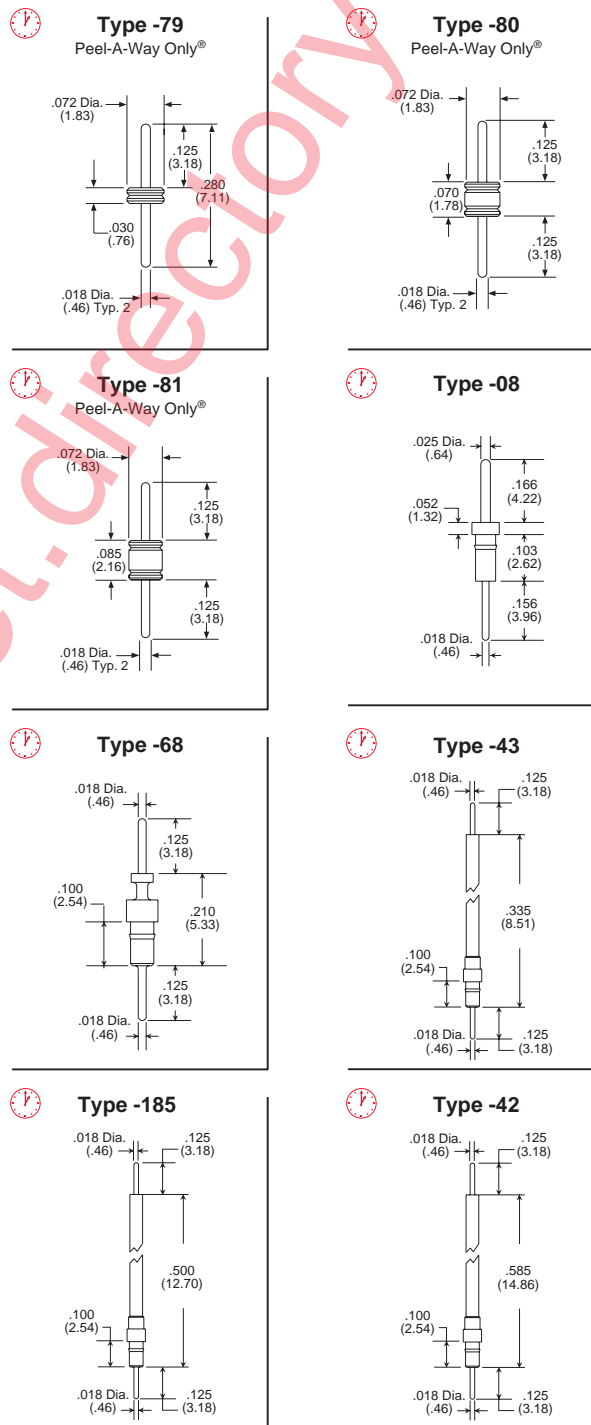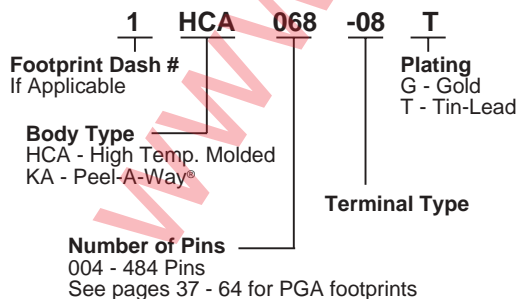

 **Quick turn delivery**  
available on standard terminal types.

**Additional terminal types available.**  
See terminal section for detailed terminal information.

Peel-A-Way® covered by patent rights issued and/or pending.