

## Sub-Miniature Cone Lock Indicator Lamp

## Single Chip LED

### Push Fit

### IP67 - Ø5.0



#### Features

Self sealing indicator sealed to IP67;

For high density applications;

Fast, easy push fit mounting;

Optional black anodised body.

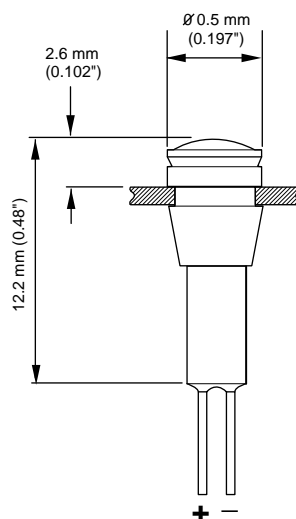

Mounting Hole SSI/5

### Ordering Information and Technical Characteristics (Ta = 25°C)

Ordering Information	Colour	Lens Type	Forward Voltage	Current (mA)	Luminous Intensity	Reverse Voltage	Viewing Angle	Operating Temp	Storage Temp			
SSI/5/RD		Coloured	2.1	20	1	5	80°	-40	-40			
SSI/5/AR			2.1	20	1.5	5						
SSI/5/GN			2.1	20	1.5	5						
SSI/5/REF1/RD			2.1	20	1	5						
SSI/5/REF1/AR			2.1	20	1.5	5						
SSI/5/REF1/GN			2.1	20	1.5	5						
SSI/5/REF1/RD			2.1	20	1	5						
SSI/5/REF1/AR			2.1	20	1.5	5						
SSI/5/REF1/GN			2.1	20	1.5	5						
SSI/5/REF1/RD			Lens	2.1	20	1				5	+85	+85
SSI/5/REF1/AR				2.1	20	1.5				5		
SSI/5/REF1/GN				2.1	20	1.5				5		
SSI/5/RD		2.1		20	1	5						
SSI/5/AR		2.1		20	1.5	5						
			<b>V</b>	<b>mA</b>	<b>mcd</b>	<b>V</b>		<b>°C</b>	<b>°C</b>			

Mean time before failure 90,000 hrs

For optional black anodised body include BB within the part number. E.G. SSIBB/5/  
Customer specials available on request.