

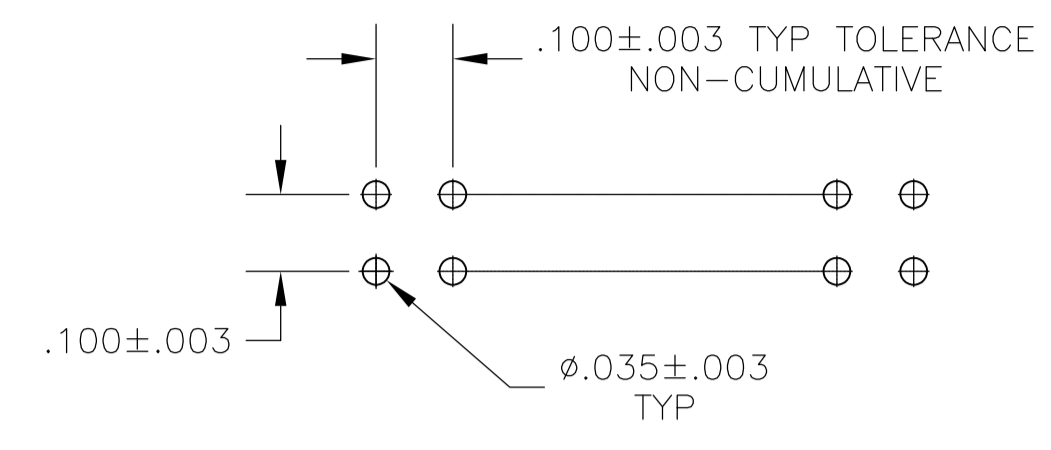
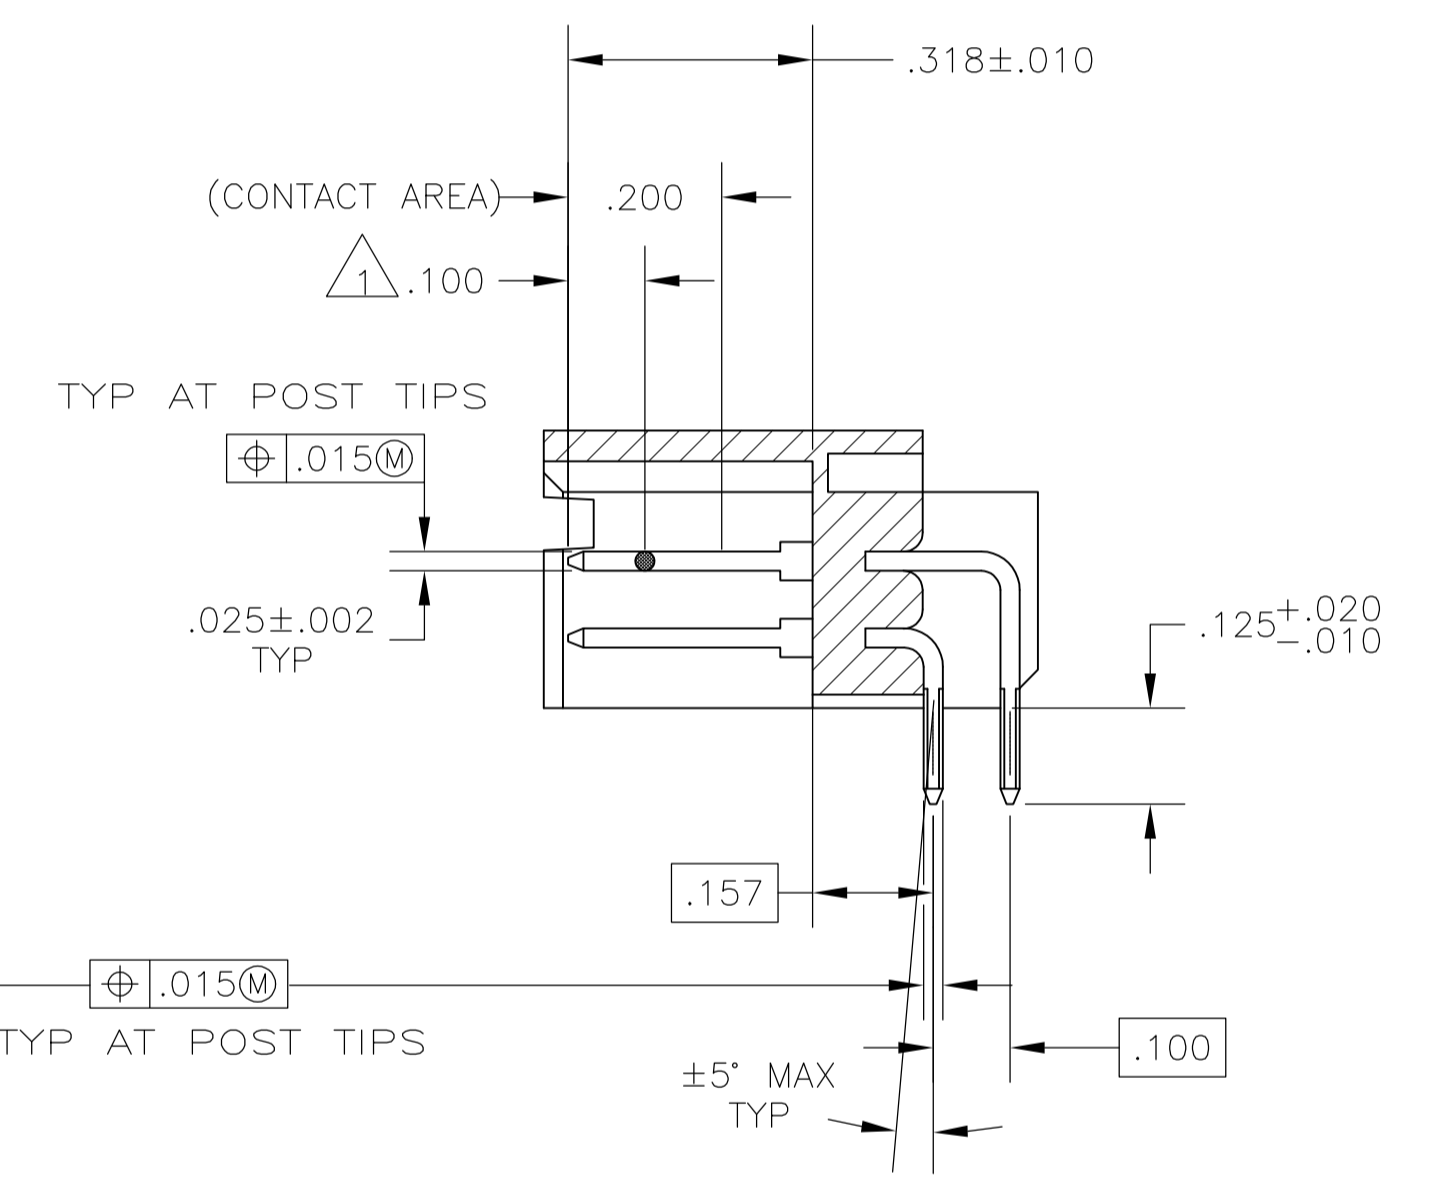


LOC		DIST		REVISIONS			
AD	00	REV	DATE	BY	CHK	APP	REV
K	EC	063C	0209	05	26APR05	BSV	JLG
K1	REVISED	PER	ECO-09-020774		24AUG09	KK	AEG

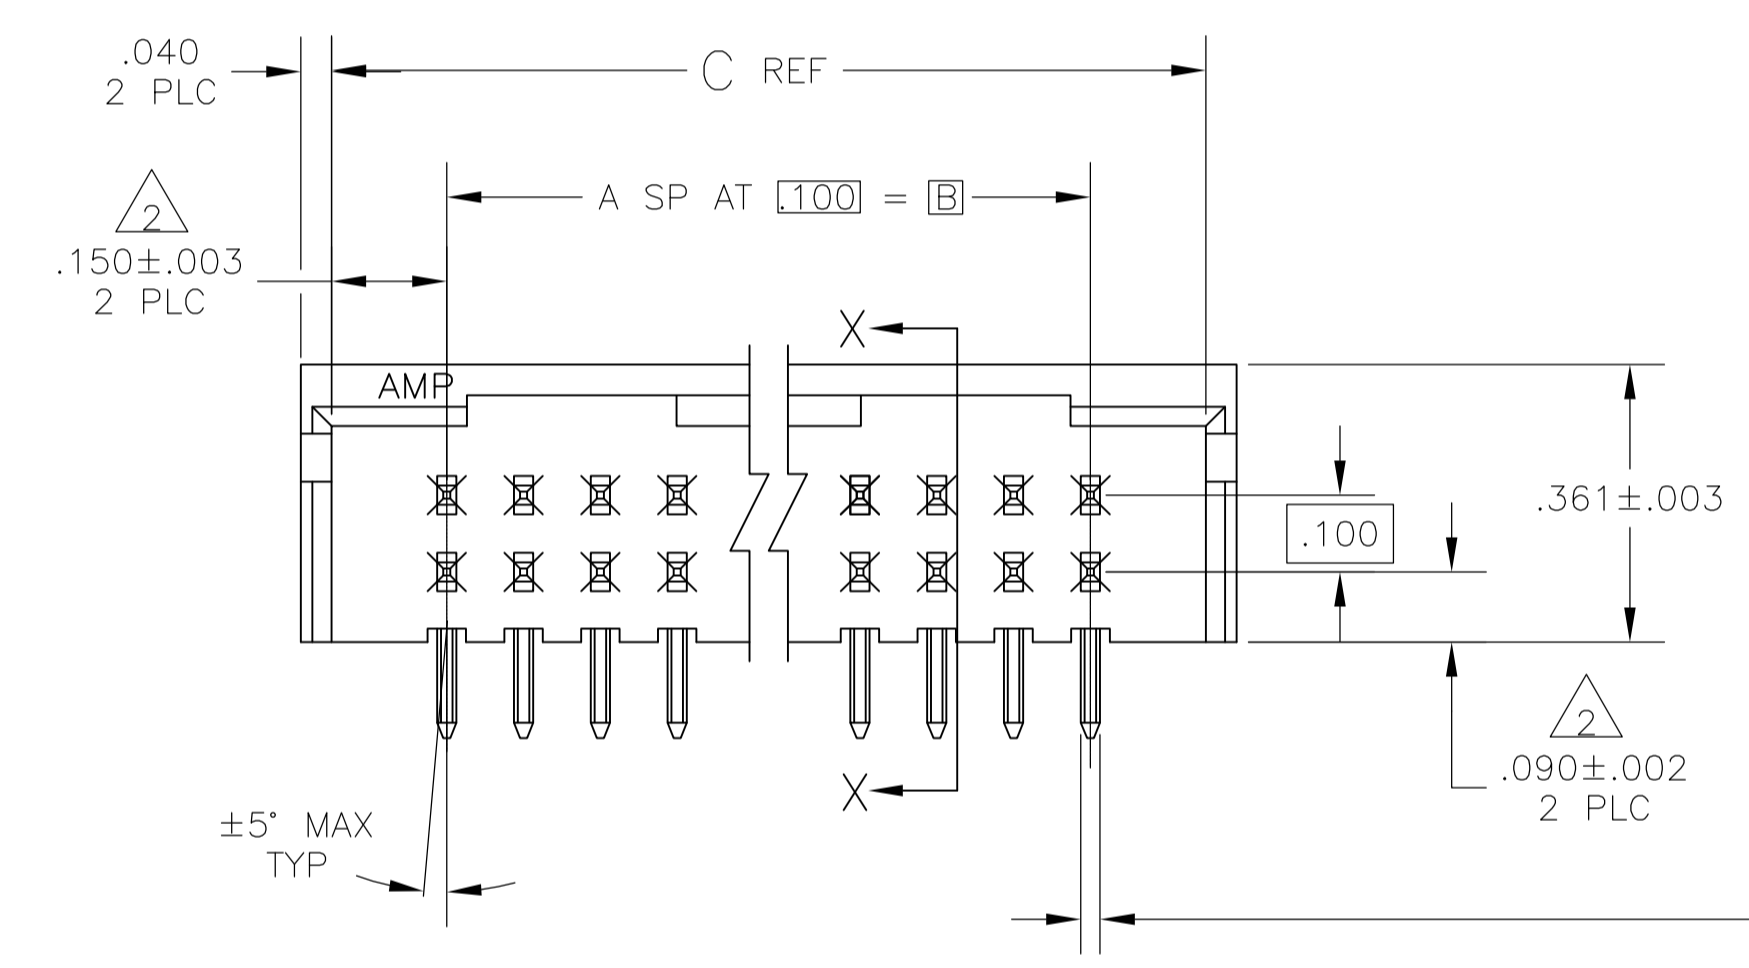

RECOMMENDED HOLE LAYOUT

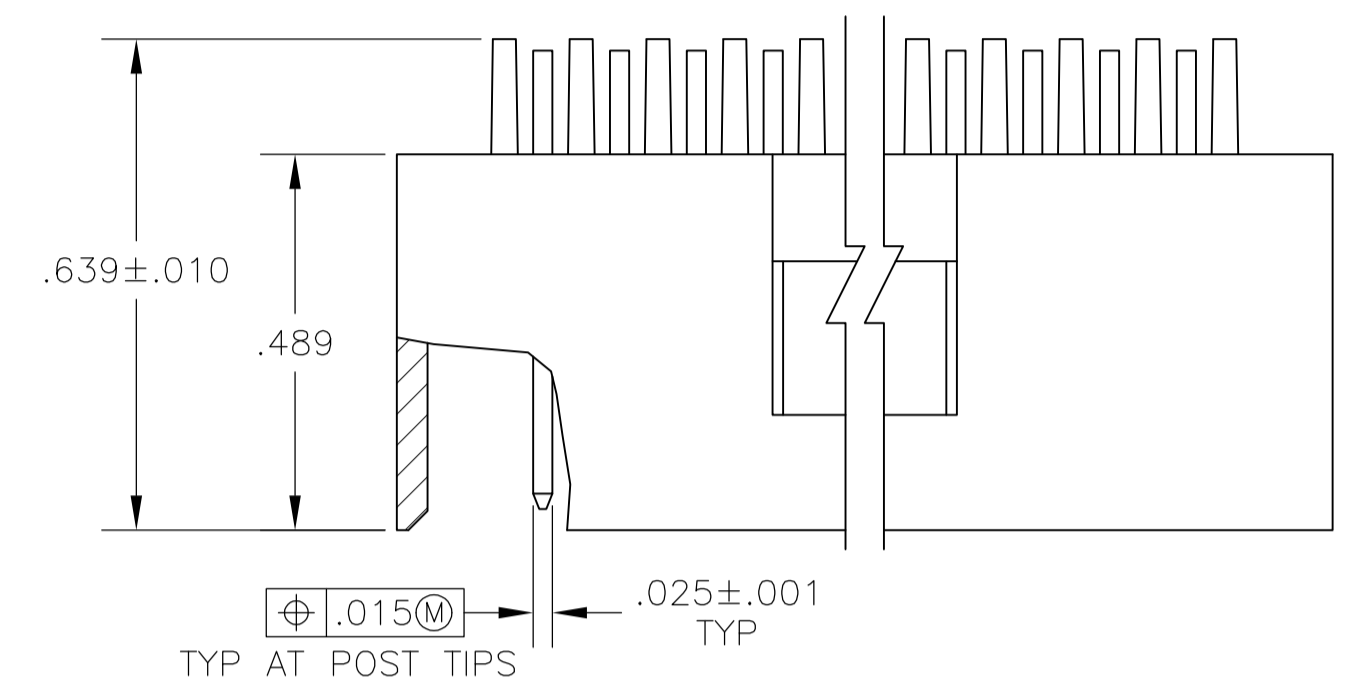

SECTION X-X

PLATING	C	B	A	NO OF POSN	PART NUMBER
△5	3.200	2.900	29	60	7-102620-6
△5	2.700	2.400	24	50	7-102620-1
△5	2.200	1.900	19	40	6-102620-6
△5	1.900	1.600	16	34	6-102620-3
△5	1.700	1.400	14	30	6-102620-1
△5	1.500	1.200	12	26	5-102620-9
△5	1.400	1.100	11	24	5-102620-8
△5	1.200	.900	9	20	5-102620-6
△5	1.100	.800	8	18	5-102620-5
△5	1.000	.700	7	16	5-102620-4
△5	.900	.600	6	14	5-102620-3
△5	.800	.500	5	12	5-102620-2
△5	.700	.400	4	10	5-102620-1
△4	3.800	3.500	35	72	△3 3-102620-2
△4	3.700	3.400	34	70	△3 3-102620-1
△4	3.600	3.300	33	68	△3 3-102620-0
△4	3.500	3.200	32	66	△3 2-102620-9
△4	3.400	3.100	31	64	△3 2-102620-8
△4	3.300	3.000	30	62	△3 2-102620-7
△4	3.200	2.900	29	60	2-102620-6
△4	3.100	2.800	28	58	△3 2-102620-5
△4	3.000	2.700	27	56	△3 2-102620-4
△4	2.900	2.600	26	54	△3 2-102620-3
△4	2.800	2.500	25	52	△3 2-102620-2
△4	2.700	2.400	24	50	2-102620-1
△4	2.600	2.300	23	48	△3 2-102620-0
△4	2.500	2.200	22	46	△3 1-102620-9
△4	2.400	2.100	21	44	△3 1-102620-8
△4	2.300	2.000	20	42	△3 1-102620-7
△4	2.200	1.900	19	40	1-102620-6
△4	2.100	1.800	18	38	△3 1-102620-5
△4	2.000	1.700	17	36	△3 1-102620-4
△4	1.900	1.600	16	34	1-102620-3
△4	1.800	1.500	15	32	△3 1-102620-2
△4	1.700	1.400	14	30	1-102620-1
△4	1.600	1.300	13	28	1-102620-0
△4	1.500	1.200	12	26	102620-9
△4	1.400	1.100	11	24	102620-8
△4	1.300	1.000	10	22	△3 102620-7
△4	1.200	.900	9	20	102620-6
△4	1.100	.800	8	18	102620-5
△4	1.000	.700	7	16	102620-4
△4	.900	.600	6	14	102620-3
△4	.800	.500	5	12	102620-2
△4	.700	.400	4	10	102620-1

- △1 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- △2 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING
- △3 OBSOLETE PART NUMBER
- △4 POSTS: .000015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- △5 POSTS: .000015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- △6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

Datasheet.Directory

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .005	4 PLC ± -	ANGLES ± -
--------------------	--	-----------	-----------	-----------	--------------	-----------	------------

MATERIAL: HOUSING: FLAME RETARDANT COLOR: BLACK POSTPHOS BRONZE FINISH: SEE TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT. BIN: H MOLL 16NOV87. CHK: R FEJDT 16NOV87. APVD: R FLICKER 17NOV87. NAME: Tyco Electronics Corporation, Harrisburg, Pa 17105-3608.

PRODUCT SPEC: HEADER ASSY, MOD II, DBL ROW, .100X.100 C/L, RIGHT ANGLE, (3) SIDED SHROUD

APPLICATION SPEC: SIZE: A1. CAGE CODE: 00779. DRAWING NO: 102620. WEIGHT: -. RESTRICTED TO: CUSTOMER DRAWING. SCALE: 4:1. SHEET: 1 OF 1. REV: K1.