

7597360 RAYTHEON CO.

57C 04443 D T-79-05-10

PRODUCT SPECIFICATIONS

LINEAR INTEGRATED CIRCUITS

Raytheon

General Purpose Operational Amplifier

LM101A/
201A/301A

Features

- Offset voltage 3.0mV maximum over temperature
 - Input current 100nA maximum over temperature
 - Offset current 20nA maximum over temperature
 - Offsets guaranteed over entire common-mode range and supply voltage range
 - Frequency compensated 30pF
 - Supply voltage ± 5.0 V to ± 20 V

advanced epitaxial process. The units may be fully compensated with the addition of a 30pF capacitor stabilizing the circuit for all feedback configurations including capacitive loads.

The device may be operated as a comparator with a differential input as high as $\pm 30V$. Used as a comparator the output can be clamped at any desired level to make it compatible with logic circuits.


The LM101A operates over the full military temperature range from -55°C to $+125^{\circ}\text{C}$. The commercial version, LM301A operates over a temperature range from 0°C to $+70^{\circ}\text{C}$.

The LM201A is the same as the LM101A except its performance is guaranteed from -25°C to $+85^{\circ}\text{C}$.

Description


The LM101A, 201A, and 301A are general purpose high performance operational amplifiers fabricated monolithically on a silicon chip by an

Schematic Diagram

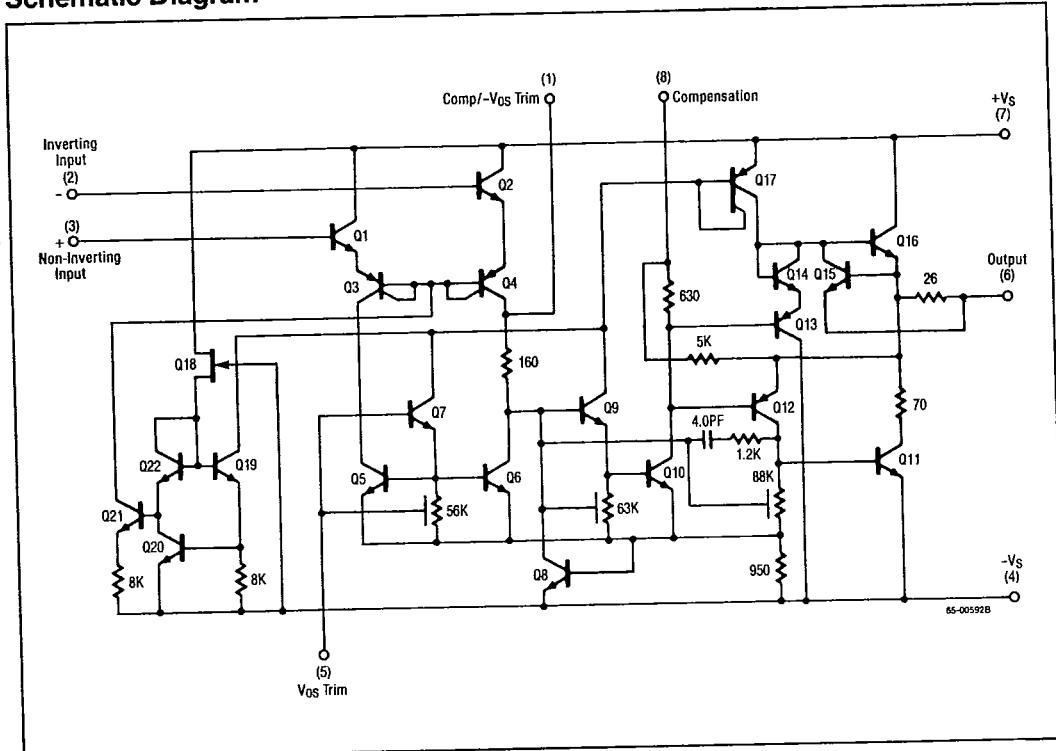

7597360 RAYTHEON CO.

57C 04444 D T-79-05-10

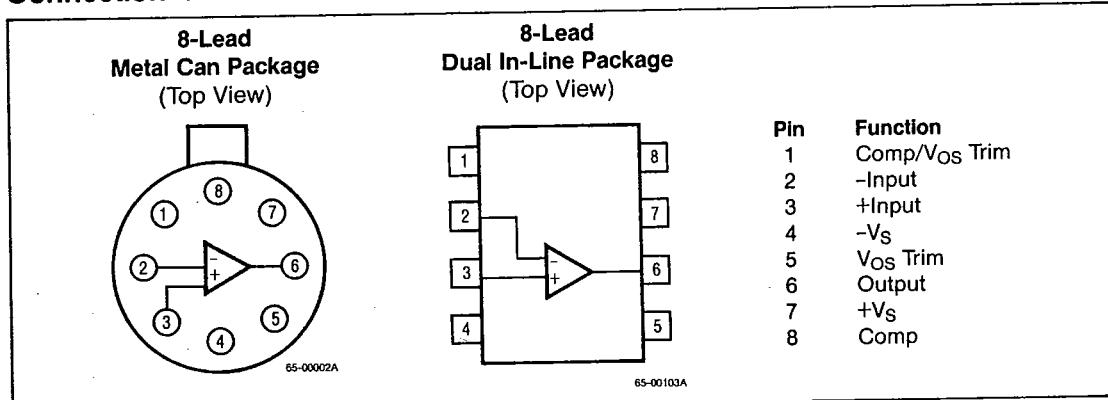LM101A/201A/301A**General Purpose Operational Amplifier****Connection Information****Absolute Maximum Ratings**

Supply Voltage	
LM101A/LM201A	$\pm 22V$
LM301A	$\pm 18V$
Differential Input Voltage	30V
Input Voltage ¹	$\pm 15V$
Output Short-Circuit Duration ²	Indefinite
Storage Temperature Range	-65°C to +150°C
Operating Temperature Range	
LM101A	-55°C to +125°C
LM201A	-25°C to +85°C
LM301A	0°C to +70°C
Lead Soldering Temperature (60 Sec)	+300°C

- Notes:
- For supply voltages less than $\pm 15V$, the absolute maximum input voltage is equal to the supply voltage.
 - Continuous short-circuit is allowed for case temperatures to +125°C and ambient temperatures to +75°C for LM107; case temperatures to +70°C and ambient temperatures to +55°C for LM307.


Thermal Characteristics

	8-Lead Plastic DIP	8-Lead Ceramic DIP	8-Lead TO-99 Metal Can
Max. Junc. Temp.	125°C	175°C	175°C
Max. P _D T _A < 50°C	468mW	833mW	658mW
Therm. Res. θ _{JC}	—	45°C/W	50°C/W
Therm. Res. θ _{JA}	160°C/W	150°C/W	190°C/W
For T _A > 50°C Derate at	6.25mW per °C	8.33mW per °C	5.26mW per °C

Ordering Information

Part Number	Package	Operating Temperature Range
LM101ADE	Ceramic	-55°C to +125°C
LM101ADE/883C*	Ceramic	-55°C to +125°C
LM101AH	TO-99	-55°C to +125°C
LM101AH/883C*	TO-99	-55°C to +125°C
LM201ADE	Ceramic	-25°C to +85°C
LM201ADE/883C*	Ceramic	-25°C to +85°C
LM201AH	TO-99	-25°C to +85°C
LM201AH/883C*	TO-99	-25°C to +85°C
LM301ADE	Ceramic	0°C to +70°C
LM301AH	TO-99	0°C to +70°C
LM301AN	Plastic	0°C to +70°C

*MIL-STD-883, Level C Processing

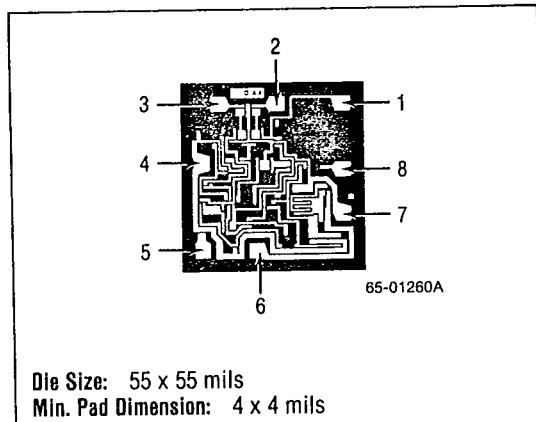Mask Pattern

7597360 RAYTHEON CO.

57C 04445 D T-79-05-10

General Purpose Operational Amplifier

LM101A/201A/301A**Electrical Characteristics**(C = 30pF; LM101A, LM201A: $\pm 5.0V \leq V_S \leq \pm 20V$; LM301A: $\pm 5.0V \leq V_S \leq \pm 15V$; see Note 1)

Parameters	Test Conditions	LM101A/LM201A			LM301A			Units
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	$T_A = +25^\circ C, R_S \leq 50k\Omega$		0.7	2.0		2.0	7.5	mV
Input Offset Current	$T_A = +25^\circ C$		1.5	10		3.0	50	nA
Input Bias Current	$T_A = +25^\circ C$		30	75		70	250	nA
Input Resistance	$T_A = +25^\circ C$	1.5	4.0		0.5	2.0		MΩ
Supply Current	$T_A = +25^\circ C$ (Note 2)		1.8	3.0		1.8	3.0	mA
Large Signal Voltage Gain	$T_A = +25^\circ C, V_S = \pm 15V, V_{OUT} = \pm 10V, R_L \geq 2k\Omega$	50	160		25	160		V/mV
Input Offset Voltage	$R_S \geq 50k\Omega$			3.0			10	mV
Average Input Offset Voltage Drift				3.0	15		6.0	µV/°C
Input Offset Current				20			70	nA
Average Input Offset Current Drift	$+25^\circ C \leq T_A \leq +125^\circ C$		0.01	0.1				nA/°C
	$+25^\circ C \leq T_A \leq +70^\circ C$					0.01	0.3	
	$-55^\circ C \leq T_A \leq +25^\circ C$		0.02	0.2				
	$0^\circ C \leq T_A \leq +25^\circ C$					0.02	0.6	
Input Bias Current				100			300	nA
Supply Current	$T_A = +125^\circ C, V_S = \pm 20V$		1.2	2.5				mA
Large Signal Voltage Gain	$T_A = +15^\circ C, V_{OUT} = \pm 10V, R_L \geq 2k\Omega$	25			15			V/mV
Output Voltage Swing	$V_S = \pm 15V, R_L = 10k\Omega$	±12	±14		±12	±14		V
	$R_L \geq 2k\Omega$	±10	±13		±10	±13		
Input Voltage Range	(Note 2)	±15			±12			V
Common Mode Rejection Ratio	$R_S \leq 50k\Omega$	80	96		70	90		dB
Power Supply Rejection Ratio	$R_S \leq 50k\Omega$	80	96		70	96		dB

Notes: 1. These specifications apply for $-55^\circ C < T_A < +125^\circ C$ LM101A, $-25^\circ C$ to $+85^\circ C$ LM201A, and $0^\circ C < T_A < +70^\circ C$ LM301A, unless otherwise specified.

2. $V_S = \pm 20V$ for LM101A and LM201A, $V_S = \pm 15V$ for LM301A.

The information contained in this data sheet has been carefully compiled; however, it shall not by implication or otherwise become part of the terms and conditions of any subsequent sale. Raytheon's liability shall be determined solely by its standard terms and conditions of sale. No representation as to application or use or that the circuits are either licensed or free from patent infringement is intended or implied. Raytheon reserves the right to change the circuitry and other data at any time without notice and assumes no liability for inadvertent errors.

Raytheon







7597360 RAYTHEON CO,

57C 04446 D T-79-05-10

LM101A/201A/301A

General Purpose Operational Amplifier

Typical Performance Characteristics

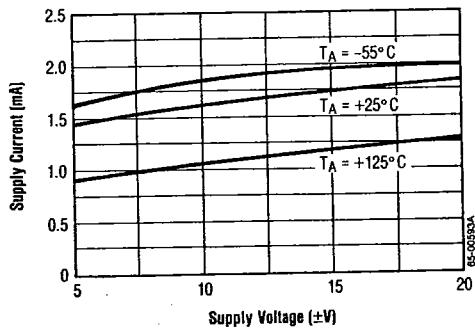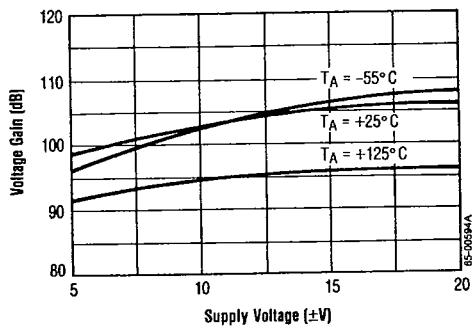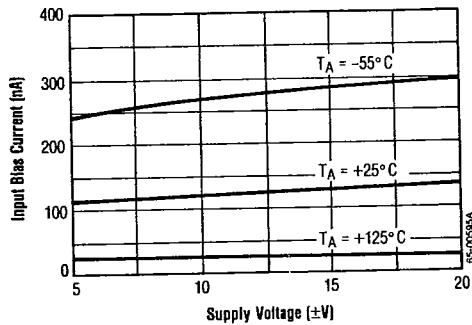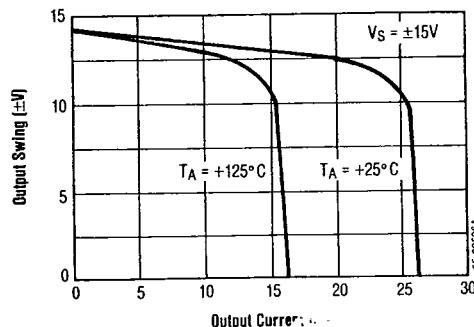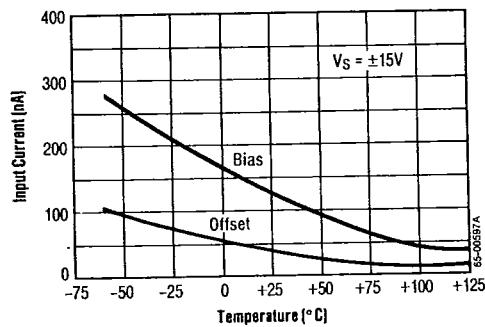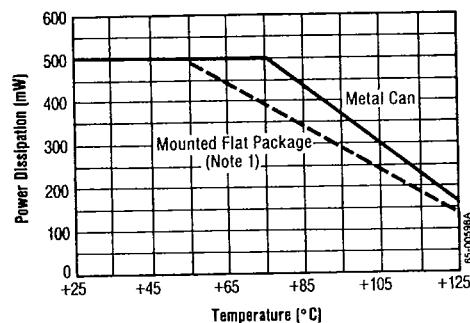Supply Current**Voltage Gain****Input Bias Current****Current Limiting****Input Current****Maximum Power Dissipation**

7597360 RAYTHEON CO.

57C 04447


D T-79-05-10

General Purpose Operational Amplifier


LM101A/201A/301A

Typical Performance Characteristics (Continued)


Open Loop Frequency Response

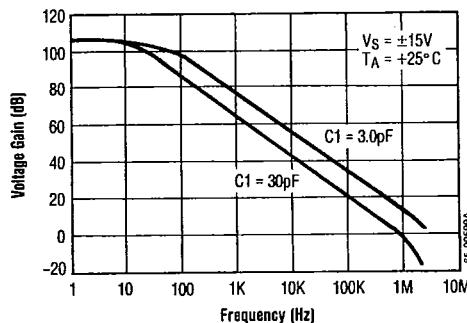

Large Signal Frequency Response

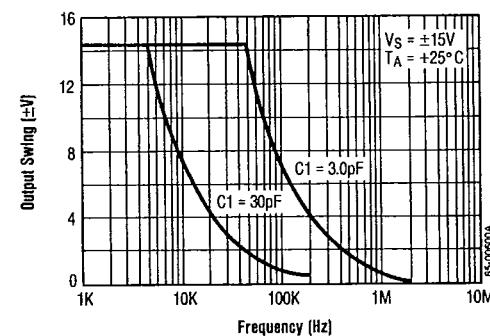

Voltage Follower Pulse Response

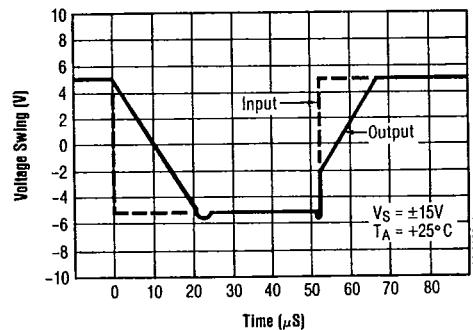

7597360 RAYTHEON CO.


57C 04448 D T-79-05-10

General Purpose Operational Amplifier


LM101A/201A/301A

Typical Applications

Inverting Amplifier With Balancing Circuit

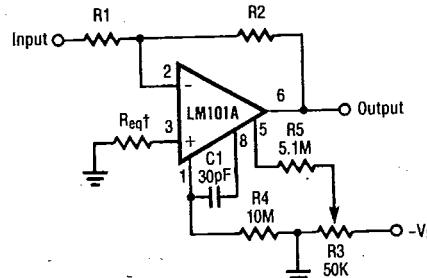


Voltage Comparator for Driving DTL or TTL Integrated Circuits

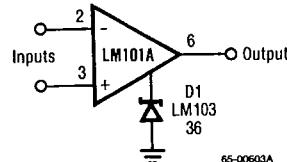

†May be zero or equal to parallel combination of R1 and R2 for minimum offset.


65-00602A

Low Drift Sample and Hold

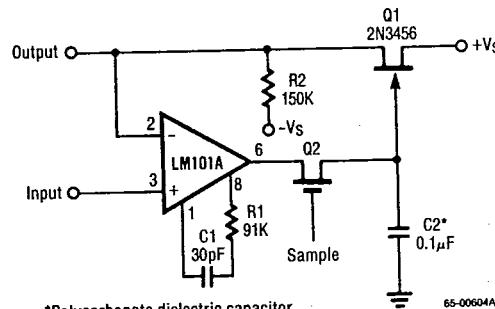

*Polycarbonate dielectric capacitor

Voltage Comparator for Driving RTL Logic or High Current Driver

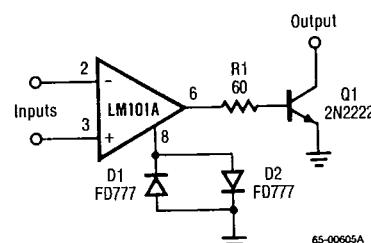

65-00605A