
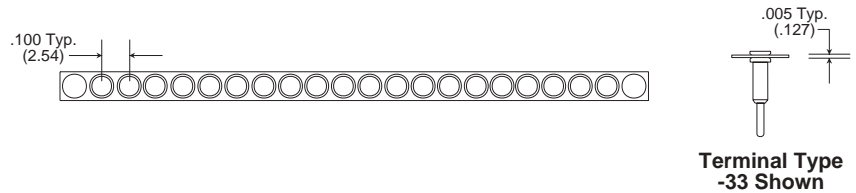


Peel A-Way® Single In-Line Sockets

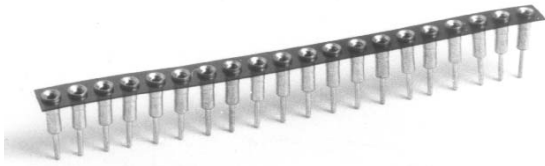

Terminal Information

Features:

- Peel away terminal carrier after soldering.
- Disposable terminal carrier.
- Complete soldering visibility on both sides of PCB.
- Maximum air flow.
- Better flux rinse.
- No contact pull out due to extraction of terminal carrier.

Terminals and Contacts:

Terminal: Brass - Copper Alloy (C36000), ASTM-B-16

Contact: Beryllium Copper - Copper Alloy (C17200), ASTM-B-194

Solder Preform:

63% Tin, 37% Lead


Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel

Contact: Gold over Nickel or Tin-Lead over Nickel

Body Material:


KSS - Polyimide Film
Temp. range -269°C to 400°C
(-452°F to 752°F)

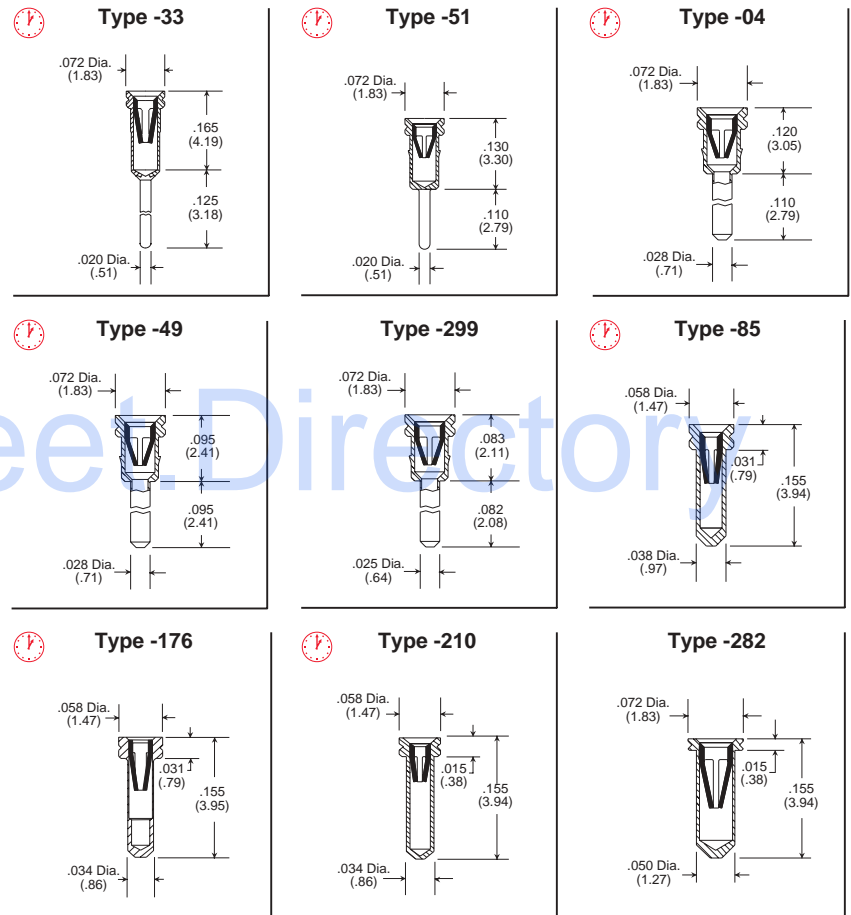

Quick turn delivery available on standard terminal types.


Additional terminal types available. See terminal section for detailed terminal information.

How To Order

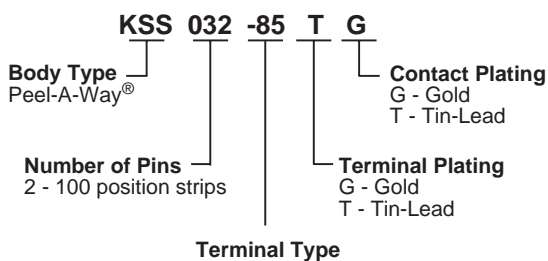


Solder Preform Terminals

Type -111



Type -150



See page 81 for complete details.

Peel-A-Way® covered by patent rights issued and/or pending.