


Glass Passivated Single-Phase Bridge Rectifier

Major Ratings and Characteristics

| | |
|-------------|----------------|
| $I_{F(AV)}$ | 4 A |
| V_{RRM} | 50 V to 1000 V |
| I_{FSM} | 150 A |
| I_R | 5 μ A |
| V_F | 1.0 V |
| T_j max. | 150 °C |

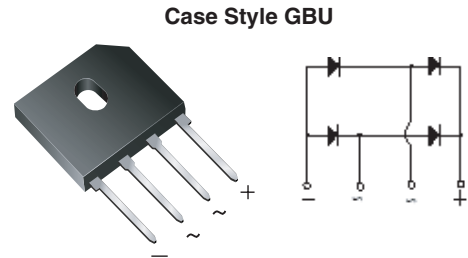

Features

- UL Recognition file number E54214
- Ideal for printed circuit boards
- High surge current capability
- High case dielectric strength of 1500 V_{RMS}
- Solder Dip 260 °C, 40 seconds



Mechanical Data

Case: GBU

Epoxy meets UL-94V-0 Flammability rating

Terminals: Matte tin plated (E3 Suffix) leads, solderable per J-STD-002B and JESD22-B102D

Polarity: As marked on body

Mounting Torque: 10 cm-kg (8.8 inches-lbs) max.

Recommended Torque: 5.7 cm-kg (5 inches-lbs)

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, Switching Mode Power Supply, Adapter, Audio equipment, and Home Appliances applications.

Maximum Ratings

$T_A = 25$ °C, unless otherwise specified

| Parameter | Symbols | GBU4A | GBU4B | GBU4D | GBU4G | GBU4J | GBU4K | GBU4M | Units | |
|--|-------------------------------|---------------|-------|-------|-------|-------|-------|-------|-------|--------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V | |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | |
| Maximum average forward rectified output current at | $I_{F(AV)}$ | 4.0 | | | | | | 3.0 | | A |
| | $T_C = 100$ °C ⁽¹⁾ | | | | | | | | | |
| | $T_A = 40$ °C ⁽²⁾ | | | | | | | | | |
| Peak forward surge current single sine-wave superimposed on rated load | I_{FSM} | 150 | | | | | | | | A |
| Rating for fusing ($t < 8.3$ ms) | I^2t | 93 | | | | | | | | A ² sec |
| Operating junction and storage temperature range | T_J, T_{STG} | - 55 to + 150 | | | | | | | | °C |

Note:

(1) Unit case mounted on 1.6 x 1.6 x 0.06" thick (4.0 x 4.0 x 0.15 cm) Al. Plate

(2) Units mounted on P.C.B. with 0.5 x 0.5" (12 x 12 mm) copper pads and 0.375" (9.5 mm) lead length

Electrical Characteristics

$T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified

| Parameter | Test condition | Symbols | GBU4A | GBU4B | GBU4D | GBU4G | GBU4J | GBU4K | GBU4M | Units | |
|---|---|---------|------------|-------|-------|-------|-------|-------|-------|-------|---------------|
| Maximum instantaneous forward drop per leg | at 4.0 A | V_F | 1.0 | | | | | | | | V |
| Maximum DC reverse current at rated DC blocking voltage per leg | $T_A = 25\text{ }^\circ\text{C}$ $T_A = 125\text{ }^\circ\text{C}$ | I_R | 5.0 500 | | | | | | | | μA |
| Typical junction capacitance per leg | at 4.0 A, 1 MHz | C_J | 100 | | | | 45 | | | | pF |

Thermal Characteristics

$T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified

| Parameter | Symbols | GBU4A | GBU4B | GBU4D | GBU4G | GBU4J | GBU4K | GBU4M | Units | |
|------------------------------------|--|-------|-------|-------|-------|-----------|-------|-------|-------|--------------------|
| Typical thermal resistance per leg | $R_{\theta JA}^{(2)}$ $R_{\theta JC}^{(1)}$ | | | | | 22 4.2 | | | | $^\circ\text{C/W}$ |

Note:

- (1) Unit case mounted on Al plate heatsink
- (2) Units mounted on P.C.B. with 0.5 x 0.5" (12 x 12 mm) copper pads and 0.375" (9.5 mm) lead length

Ratings and Characteristics Curves

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

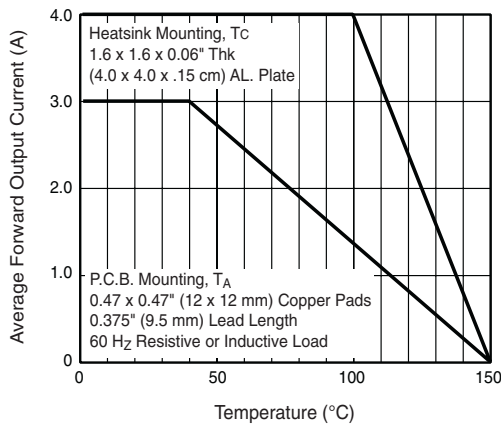


Figure 1. Derating Curve Output Rectified Current

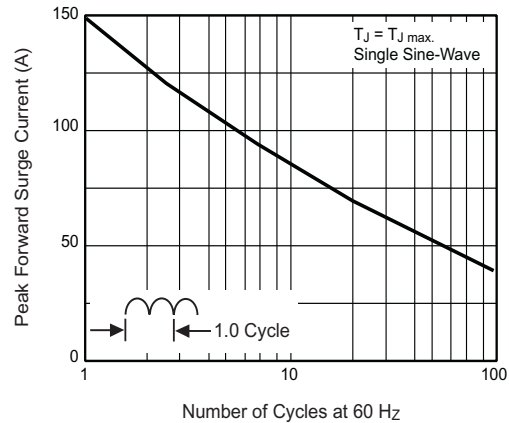


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

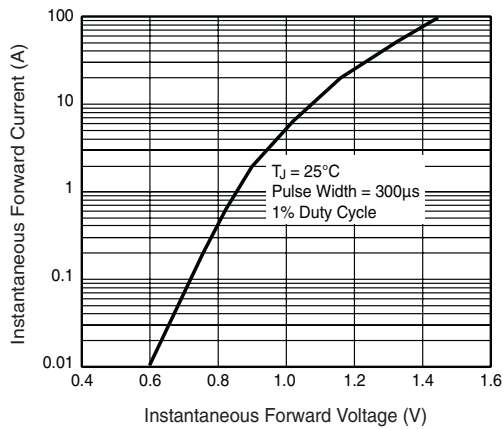


Figure 3. Typical Forward Characteristics Per Leg

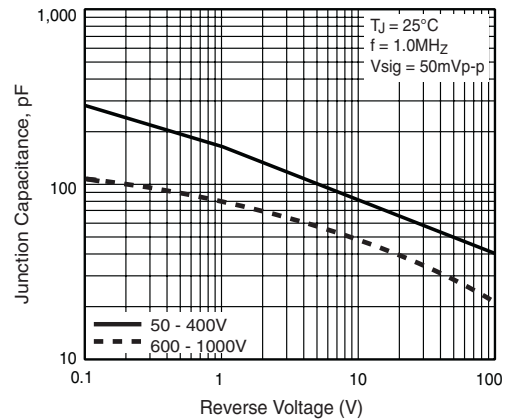


Figure 5. Typical Junction Capacitance Per Leg

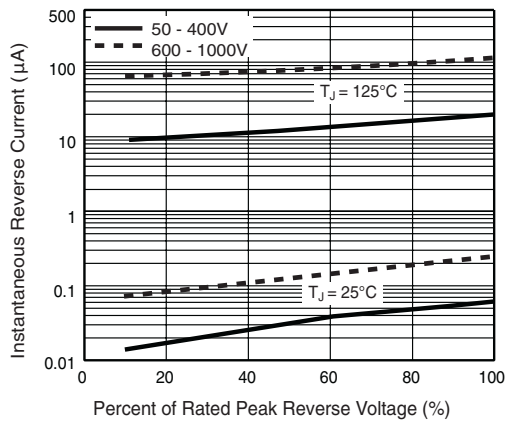


Figure 4. Typical Reverse Leakage Characteristics Per Leg


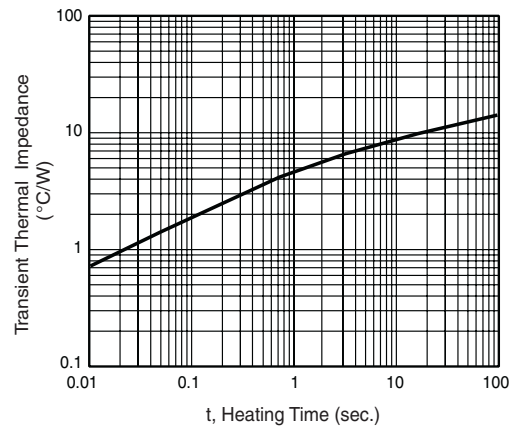


Figure 6. Typical Transient Thermal Impedance

Package outline dimensions in inches (millimeters)

Case Type GBU

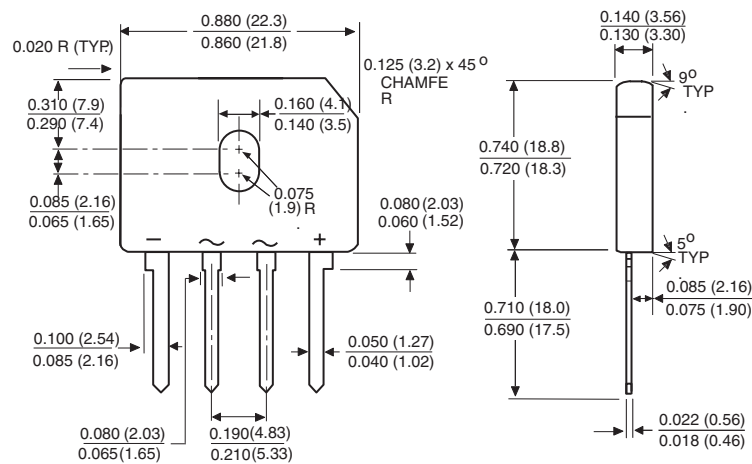

Polarity shown on front side of case, positive lead by beveled corner



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.