

- Interchangeable with MIL-C-26482 Series 1
- Operating temperature - 55°C to + 200°C


The PV connector is designed to meet the rugged requirements of MIL-C-26482, Series 2/MIL-C-83723 Series 1*, the specification which delineates the critical requirements of space-age applications. PV connectors have been used extensively on major aerospace programs requiring general-purpose, miniature cylindrical bayonet coupling connectors such as Space Shuttle, Apollo, ATM, OWS Minuteman, Skylab, Thor-Delta, Titan IIIC, and Viking.

The PV series is an important member of the Universal Interconnect System (UIS) - the only system that can perform all interconnection missions. This system is adaptable for use with connectors of all shapes and sizes, including circular and rectangular configurations, standard, miniature and subminiature sizes. UIS is a rear servicing system that evolved from the LITTLE CAESAR® rear release contact retention assembly, pioneered and developed by ITT Cannon. Since this time, ITT Cannon, and its licensees, have supplied to industry over 250 million interconnections utilizing this system.

PV7 connectors are available under numerous industrial specifications, some of which are listed below:

- CS512089 Jet Propulsion Laboratory
- 40M39569 NASA, George C. Marshall Space Flight Center
- 81D52 Martin Marietta, Denver Division
- MG414-0365 Rockwell International Space Division
- AC414-0013 Rockwell International Autonetics Division
- STS0003 McDonnell Douglas Astronautics

This connector series is manufactured to accommodate the following backshells: M85049/31 (MS3416), M85049/51 (MS3418) and M85049/52 (MS3417). Backshells are not included with connector and must be ordered separately. Backshells on page 161 are Non-MS type.

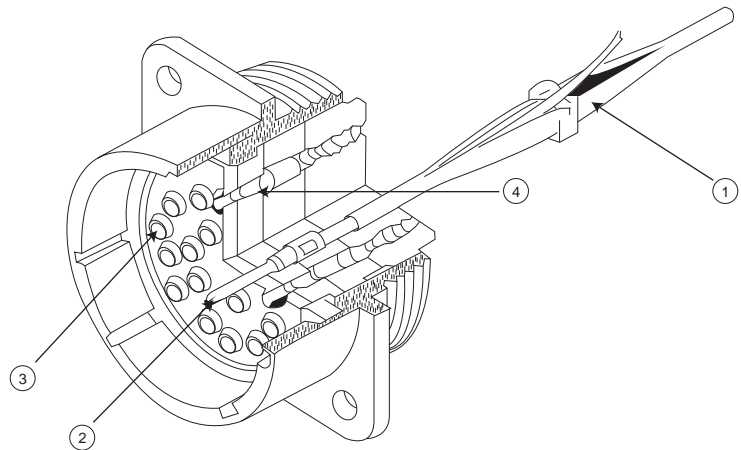

Universal Insertion / Extraction Tool Style - A single, expendable plastic tool is used for insertion and extraction of both pins and sockets.

Simple, Strong Contact Design - One basic configuration eliminates undercuts and maximizes bend resistance for positive contact mating.

Closed-Entry Socket Insert - Hard dielectric socket face of mating connector has lead-in chamfers for positive alignment of pins and sockets.



Interfacial Pin Insert Seal - Universal interconnect permits design of raised moisture barriers around each pin which mate into lead-in chambers of hard face sockets insert for individual contact sealing. Interfacial sealing is never touched by service tools.

Superior Contact Stability - Rear Contact Release System (LITTLE CAESAR contact assembly) features a stamped metal retaining clip captivated by molded-in shoulders of each contact cavity in the insulator. A rear-inserted plastic tool expands the tines beyond the contact shoulder, releasing the contact.

Polarized Backshells - Interlocking teeth on the front of the backshell and rear portion of the shell allow endbells to be positioned as desired, eliminating chafing of wire during assembly.

Military Specification Cross Reference

| PV7 and MIL-C-26482 (Series 2) Replacement for | MS Standards | ITT Cannon Prefix | MIL-C-83723* | | Description |
|---|--------------|--------------------|---------------|------------|-----------------------------|
| | | Commercial Design | Socket | Pin | |
| MIL-C-26482 (Series 1) | | MIL-C-26482 | Socket | Pin | |
| MS3110,MS3120 | MS3470 | PV70 | /1 | /2 | Narrow Flange Receptacle |
| MS3111,MS3121 | MS3471 | PV71 | /7 | /8 | Cable Connecting Receptacle |
| MS3112,MS3122 | MS3470 | PV70 | /1 | /12 | Narrow Flange Receptacle |
| MS3114,MS3124 | MS3474 | PV74 | /5 | /6 | Jam Nut Receptacle |
| MS3116,MS3126 | MS3476 | PV76 | /13 | /14 | Straight Plug |
| | MS3472 | PV72 | /3 | /4 | Wide Flange Receptacle |
| | MS3475 | PV75 | /43 | /42 | Straight Plug, RFI Shielded |
| NAS1599 | | | | | |
| NAS1650,NAS1699 | MS3470 | | /1 | /2 | Narrow Flange Receptacle |
| NAS1651,NAS1700 | MS3472 | | /3 | /4 | Wide Flange Receptacle |
| NAS1652,NAS1701 | MS3474 | | /5 | /6 | Jam Nut Receptacle |
| NAS1653,NAS1702 | MS3476 | | /13 | /14 | Straight Plug |

*NOTE: M83723 series has been superseded by MIL-C-26482 Series 2.

Performance and Material Specifications

MATERIALS AND FINISHES


| Description | Material | Finish |
|---|---|---|
| Shell | Aluminum alloy per QQ-A-367, QQ-A-591 or QQ-A-225 | Electroless nickel per MIL-C-26074, anodized per MIL-A-8625 or olive drab cadmium over nickel |
| Insulators | Rigid dielectric | None |
| Elastomers (grommets, interfacial and O ring seals) | Silicone rubber (ITT Cannon blend) or Fluorosilicone rubber (ITT Cannon blen) | None None |
| Contacts | Copper alloy | Gold page per MIL-G-45204 |
| Coupling Nut | Aluminum alloy per QQ-A-591 | Electroless nickel per MIL-C-26074, anodized per MIL-A-8625 or olive drab cadmium over nickel |
| Jam Nut (on PV74) | Aluminum alloy per QQ-A-225 | Electroless nickel per MIL-C-26074, anodized per MIL-A-8625 or olive drab cadmium over nickel |

ELECTRICAL

| Contact Size | Wire Size | Insulation O.D. Limits, inch (mm) | | Max Current for Test (amps) | Potential Drop (Millivolts at 25°C) |
|--------------|-----------|-----------------------------------|-------------|-----------------------------|-------------------------------------|
| | | min. | max. | | |
| 12 | 12 | .097 (2.46) | .158 (4.01) | 23 | 50 |
| | 14 | | | | |
| 16 | 16 | .053 (1.53) | .103 (2.62) | 13 | 50 |
| | 20 | | | | |
| 20 | 20 | .040 (1.02) | .083 (2.11) | 7.5 | 55 |
| | 24 | | | | |

| Service Rating | Dielectric Withstanding Voltage (Test Volatge) | | |
|----------------|--|---------------------|----------------------|
| | Sea Level | 70,000 ft. Altitude | (25°C) |
| I | 1500 Vac rms | 375 Vac rms | 5000 megohms minimum |
| II | 2300 Vac rms | 500 Vac rms | 5000 megohms minimum |

How to Order

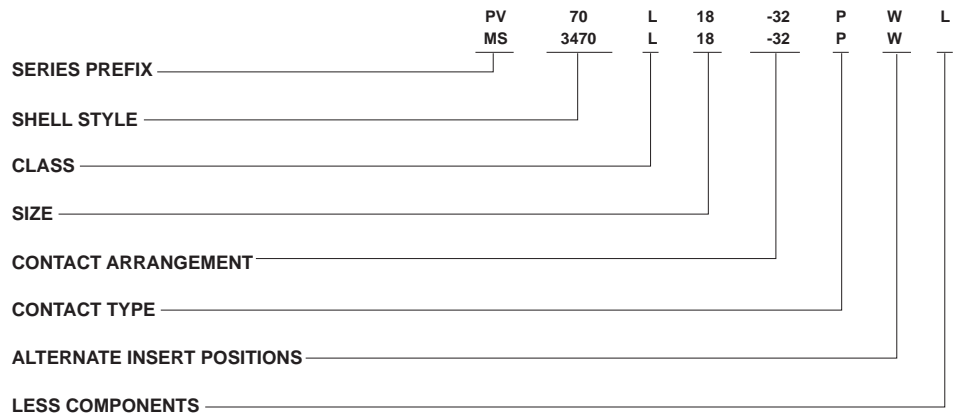

SERIES PREFIX

MS - Complies with MIL-C-26482 Series 2
 PV - ITT Cannon Interchangeable with MIL-C-26482, Series 2

SHELL STYLE

| ITT Cannon Part No. | Military No. | Description |
|---------------------|--------------|-------------------------------|
| PV70 | MS3470 | - Narrow Flange Receptacle |
| PV71 | MS3471 | - Cable Connecting Receptacle |
| PV72 | MS3472 | - Wide Flange Receptacle |
| PV74 | MS3474 | - Jam Nut Receptacle |
| PV75 | MS3475 | - Straight Plug, RFI Shielded |
| PV76 | MS3476 | - Straight Plug |

CLASS

(PV Series and MS Series)
 *A - Fluid resistant, 200°C, non-conductive (anodized)
 L - Fluid resistant, 200°C, conductive, finish (nickely)
 W - Corrosive and fluid resistant, 175°C (cadmium over nickel)

SHELL SIZE

8, 10, 12, 14, 16, 18, 20, 22 and 24
 (Size 8 available in PV70 & 76 only)

CONTACT ARRANGEMENTS

See page 162.

CONTACT TYPE

P - Pin contact
 S - Socket contact
 A - Less pin contact* (MS only)
 B - Less socket contacts* (MS only)
 * The "A" and "B" designators are used only when other than power contacts are ato be installed (i.e. shielded, coaxial and thermocouple contacts).

ALTERNATE INSERT POSITIONS

No designation required for normal position.
 Standard MS alternate positions available.

LESS COMPONENTS



Use "L" if PV connectors are ordered less contacts, sealing plugs and insertion/extraction tool ("L" is not stamped on connectors). To order MS connectors *less contacts*, purchase order must state less contacts.

*Consult factory for availability.

Narrow Flange Receptacle

MS3470

PV70


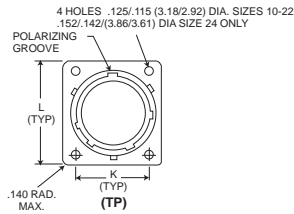


| Shell Size* | B Max | F Max | G Max | J Max | K | L | U Thread UNEF Class 2A |
|-------------|--------------|---------------|---------------|-------------|---------------|---------------|------------------------|
| 8 | .462 (11.73) | .474 (12.04) | 1.215 (30.85) | .078 (1.98) | .594 (15.09) | .828 (21.03) | 1/2-20 |
| 10 | .462 (11.73) | .594 (15.01) | 1.215 (30.85) | .078 (1.98) | .719 (18.26) | .954 (24.23) | 5/8-24 |
| 12 | .462 (11.73) | .751 (19.08) | 1.215 (30.85) | .078 (1.98) | .812 (20.62) | 1.047 (26.59) | 3/4-20 |
| 14 | .462 (11.73) | .876 (22.25) | 1.215 (30.85) | .078 (1.98) | .906 (23.01) | 1.141 (28.98) | 7/8-20 |
| 16 | .462 (11.73) | 1.001 (25.43) | 1.215 (30.85) | .078 (1.98) | .969 (24.61) | 1.234 (31.34) | 1-20 |
| 18 | .462 (11.73) | 1.126 (28.60) | 1.215 (30.85) | .078 (1.98) | 1.062 (26.97) | 1.328 (33.73) | 1-1/16-18 |
| 20 | .587 (14.91) | 1.251 (31.78) | 1.275 (32.40) | .110 (2.79) | 1.156 (29.36) | 1.453 (36.91) | 1-3/16-18 |
| 22 | .587 (14.91) | 1.376 (34.95) | 1.275 (32.40) | .110 (2.79) | 1.250 (31.75) | 1.578 (40.08) | 1-5/16-18 |
| 24 | .620 (15.75) | 1.501 (38.13) | 1.275 (32.40) | .110 (2.79) | 1.375 (34.93) | 1.703 (43.26) | 1-7/16-18 |


Cable Connecting Receptacle

MS3471

PV71



| Shell Size* | A Max | B Max | J Max | R Dia. Max | S Max | W Max | U Thread UNEF Class 2A |
|-------------|---------------|--------------|-------------|---------------|---------------|---------------|------------------------|
| 10 | .591 (15.01) | .462 (11.73) | .078 (1.98) | 1.082 (27.48) | .954 (24.23) | 1.215 (30.86) | 5/8-24 |
| 12 | .751 (19.08) | .462 (11.73) | .078 (1.98) | 1.176 (29.87) | 1.047 (26.59) | 1.215 (30.86) | 3/4-20 |
| 14 | .876 (22.25) | .462 (11.73) | .078 (1.98) | 1.270 (32.26) | 1.141 (28.98) | 1.215 (30.86) | 7/8-20 |
| 16 | 1.001 (25.43) | .462 (11.73) | .078 (1.98) | 1.364 (34.64) | 1.234 (31.34) | 1.215 (30.86) | 1-20 |
| 18 | 1.126 (28.60) | .462 (11.73) | .078 (1.98) | 1.458 (37.03) | 1.328 (33.73) | 1.215 (30.86) | 1-1/16-18 |
| 20 | 1.251 (31.78) | .587 (14.91) | .110 (2.79) | 1.708 (43.38) | 1.578 (40.08) | 1.275 (32.38) | 1-5/16-18 |
| 22 | 1.376 (34.95) | .587 (14.91) | .110 (2.79) | 1.708 (43.38) | 1.578 (40.08) | 1.275 (32.38) | 1-5/16-18 |
| 24 | 1.501 (38.13) | .620 (15.75) | .110 (2.79) | 1.832 (46.53) | 1.703 (43.26) | 1.275 (32.38) | 1-7/16-18 |

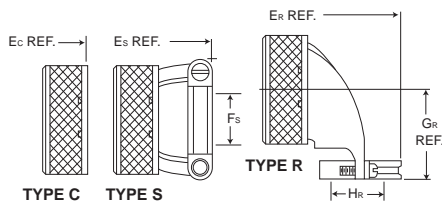

Backshell Assemblies not supplied with MS connectors.

Performance Specifications - Page 158

Contacts, Sealing Plugs, Assembly Tools - Pages 163, 165

Contacts Arrangements - Page 162

Receptacle Assembly With Backshell†


| Shell Size* | TYPE C | | TYPE S | | TYPE R | | |
|-------------|---------------|---------------|---------------|---------------|---------------|---------------|--|
| | Ec Max. | Fs Max. | Es Max. | Gr Max. | Hr Max. | Er Max. | |
| 10 | 1.492 (37.90) | .286 (7.26) | 1.842 (46.79) | .880 (23.35) | .286 (7.26) | 2.115 (53.72) | |
| 12 | 1.492 (37.90) | .416 (10.57) | 1.842 (46.79) | .950 (24.13) | .416 (10.57) | 2.250 (57.15) | |
| 14 | 1.492 (37.90) | .476 (12.09) | 2.077 (52.76) | 1.010 (25.65) | .476 (12.09) | 2.340 (59.44) | |
| 16 | 1.492 (37.90) | .626 (15.90) | 2.077 (52.76) | 1.070 (27.18) | .626 (15.90) | 2.475 (62.87) | |
| 18 | 1.492 (37.90) | .706 (17.93) | 2.077 (52.76) | 1.130 (28.70) | .706 (17.93) | 2.574 (65.38) | |
| 20 | 1.552 (39.42) | .831 (21.11) | 2.137 (54.28) | 1.190 (30.23) | .831 (21.11) | 2.767 (70.28) | |
| 22 | 1.552 (39.42) | .956 (24.28) | 2.137 (54.28) | 1.260 (32.00) | .956 (24.28) | 2.890 (73.41) | |
| 24 | 1.552 (39.42) | 1.081 (27.46) | 2.137 (54.28) | 1.320 (33.53) | 1.081 (27.46) | 3.012 (76.50) | |

*See page 158 for part numbers.† To order backshell assemblies separately, see page 161.

Wide Flange Receptacle

MS3472

PV72

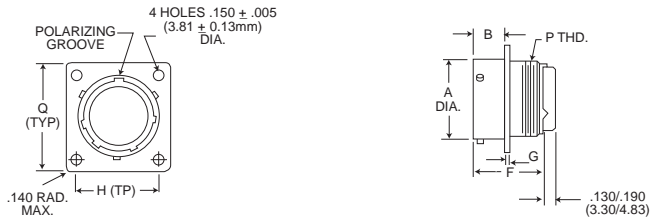


| Shell Size* | A Max. | B Max. | F Max. | G Max. | H Max. | Q Max. | P Thread UNEF Class A |
|-------------|---------------|--------------|---------------|-------------|---------------|---------------|-----------------------|
| 10 | .591 (15.01) | .493 (12.52) | 1.215 (30.85) | .078 (1.98) | .812 (20.62) | 1.141 (28.98) | 5/8-24 |
| 12 | .751 (19.08) | .493 (12.52) | 1.215 (30.85) | .078 (1.98) | .938 (23.83) | 1.266 (32.16) | 3/4-20 |
| 14 | .876 (22.25) | .493 (12.52) | 1.215 (30.85) | .078 (1.98) | 1.031 (26.19) | 1.360 (34.54) | 7/8-20 |
| 16 | 1.001 (25.43) | .493 (12.52) | 1.215 (30.85) | .078 (1.98) | 1.125 (28.58) | 1.453 (36.91) | 1-20 |
| 18 | 1.126 (28.60) | .493 (12.52) | 1.215 (30.85) | .078 (1.98) | 1.203 (30.56) | 1.532 (38.91) | 1-1/16-18 |
| 20 | 1.251 (31.78) | .587 (14.91) | 1.275 (32.40) | .110 (1.98) | 1.297 (32.94) | 1.688 (42.88) | 1-3/16-18 |
| 22 | 1.376 (34.95) | .587 (14.91) | 1.275 (32.40) | .110 (1.98) | 1.375 (34.93) | 1.766 (44.86) | 1-5/16-18 |
| 24 | 1.501 (38.13) | .620 (15.75) | 1.275 (32.40) | .110 (1.98) | 1.500 (38.10) | 1.891 (48.03) | 1-7/16-18 |


Jam Nut Receptacle

MS3474

PV74

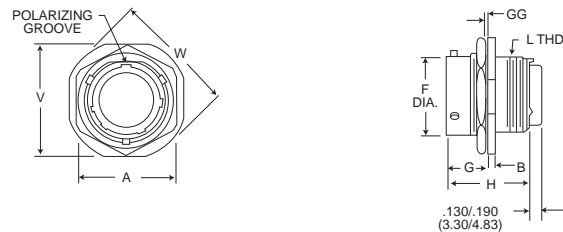

| Shell Size* | V Max. | A Max. | B Max. | F Max. | G Max. | GG Panel Thickness | H Max. | W Dia. Max. | L Thread UNEF Class 2 |
|-------------|---------------|---------------|-------------|---------------|--------------|-----------------------|---------------|---------------|-----------------------|
| 8 | .954 (24.23) | .767 (19.48) | .113 (2.87) | .474 (12.04) | .707 (17.96) | .187/.062 (4.75/1.57) | 1.215 (30.86) | 1.078 (27.38) | 1/2-20 |
| 10 | 1.078 (27.38) | .892 (22.66) | .113 (2.87) | .591 (15.01) | .707 (17.96) | .187/.062 (4.75/1.57) | 1.215 (30.85) | 1.203 (30.56) | 5/8-24 |
| 12 | 1.266 (32.16) | 1.079 (27.41) | .113 (2.87) | .751 (19.08) | .707 (17.96) | .187/.062 (4.75/1.57) | 1.215 (30.85) | 1.391 (35.33) | 3/4-20 |
| 14 | 1.391 (35.33) | 1.205 (30.61) | .113 (2.87) | .876 (22.25) | .707 (17.96) | .187/.062 (4.75/1.57) | 1.215 (30.85) | 1.516 (38.51) | 7/8-20 |
| 16 | 1.516 (38.51) | 1.329 (33.76) | .113 (2.87) | 1.001 (25.43) | .707 (17.96) | .187/.062 (4.75/1.57) | 1.215 (30.85) | 1.641 (41.68) | 1-20 |
| 18 | 1.641 (41.68) | 1.455 (36.96) | .113 (2.87) | 1.126 (28.60) | .707 (17.96) | .187/.062 (4.75/1.57) | 1.215 (30.85) | 1.766 (44.86) | 1-1/16-18 |
| 20 | 1.828 (46.43) | 1.579 (40.11) | .148 (3.76) | 1.251 (31.78) | .772 (19.61) | .250/.062 (6.35/1.57) | 1.275 (32.40) | 1.954 (49.63) | 1-3/16-18 |
| 22 | 1.954 (49.63) | 1.705 (40.11) | .148 (3.76) | 1.376 (34.95) | .772 (19.61) | .250/.062 (6.35/1.57) | 1.275 (32.40) | 2.078 (52.78) | 1-5/16-18 |
| 24 | 2.078 (52.78) | 1.829 (46.46) | .148 (3.76) | 1.501 (38.13) | .772 (19.61) | .219/.062 (5.56/1.57) | 1.275 (32.40) | 2.203 (55.96) | 1-7/16-18 |

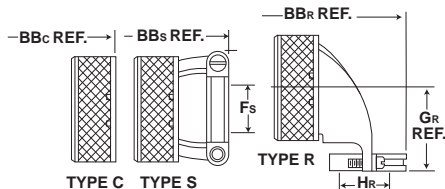

Backshell Assemblies not supplied with MS connectors.

Performance Specifications - Page 158

Contacts, Sealing Plugs, Assembly Tools - Pages 163, 165

Contact Arrangements - Page 162

Receptacle Assembly With Backshell†



| Shell Size* | TYPE C | | | TYPE S | | TYPE R | | |
|-------------|---------------|---------------|---------------|---------------|---------------|---------------|--|--|
| | BBc Max. | BBs Max. | Fs Max. | BBr Max. | Gr Max. | Hr Max. | | |
| 10 | 1.492 (37.90) | 1.842 (46.79) | .286 (7.26) | 2.115 (53.72) | .880 (22.35) | .286 (7.26) | | |
| 12 | 1.492 (37.90) | 1.842 (46.79) | .416 (10.57) | 2.250 (57.15) | .950 (24.13) | .416 (10.57) | | |
| 14 | 1.492 (37.90) | 2.077 (52.76) | .476 (12.09) | 2.340 (59.44) | 1.010 (25.65) | .476 (12.09) | | |
| 16 | 1.492 (37.90) | 2.077 (52.76) | .626 (15.90) | 2.475 (62.87) | 1.070 (27.18) | .626 (15.90) | | |
| 18 | 1.492 (37.90) | 2.077 (52.76) | .706 (17.93) | 2.574 (65.38) | 1.130 (28.70) | .706 (17.93) | | |
| 20 | 1.552 (39.42) | 2.137 (54.28) | .831 (21.11) | 2.767 (70.28) | 1.190 (30.23) | .831 (21.11) | | |
| 22 | 1.552 (39.42) | 2.137 (54.28) | .956 (24.28) | 2.890 (73.41) | 1.260 (32.00) | .956 (24.28) | | |
| 24 | 1.552 (39.42) | 2.137 (54.28) | 1.081 (27.46) | 3.012 (76.50) | 1.320 (33.53) | 1.081 (27.46) | | |

* See page 158 for part numbers. † To order backshell assemblies separately, see page 161.

Straight Plug

MS3476

PV76

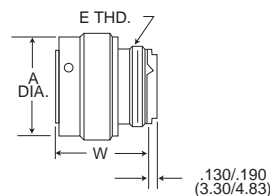

| Shell Size* | A Dia. Max. | U Max. | W Max. | E Thread UNEF Class 2A |
|-------------|---------------|---------------|---------------|------------------------|
| 8 | .765 (19.43) | .782 (19.86) | 1.230 (31.24) | 1/2-20 |
| 10 | .840 (21.34) | .926 (23.52) | 1.230 (31.24) | 5/8-24 |
| 12 | .999 (25.37) | 1.043 (26.49) | 1.230 (31.24) | 3/4-20 |
| 14 | 1.139 (28.93) | 1.183 (30.05) | 1.230 (31.24) | 7/8-20 |
| 16 | 1.261 (32.03) | 1.305 (33.15) | 1.230 (31.24) | 1-20 |
| 18 | 1.337 (33.96) | 1.391 (35.33) | 1.230 (31.24) | 1-1/16-18 |
| 20 | 1.477 (37.52) | 1.531 (38.89) | 1.230 (31.24) | 1-3/16-18 |
| 22 | 1.602 (40.69) | 1.656 (42.06) | 1.230 (31.24) | 1-5/16-18 |
| 24 | 1.723 (43.76) | 1.777 (45.14) | 1.230 (31.24) | 1-7/16-18 |

MS34745

PV75


Straight Plug, RFI Shielded



| Shell Size* | E Thread UNEF Class 2A | A Dia. Max. | U Max. | W Max. |
|-------------|------------------------|---------------|---------------|---------------|
| 10 | 5/8-24 | .840 (21.34) | .926 (21.72) | 1.230 (31.24) |
| 12 | 3/4-20 | .999 (25.37) | 1.043 (26.42) | 1.230 (31.24) |
| 14 | 7/8-20 | 1.139 (28.93) | 1.183 (29.97) | 1.230 (31.24) |
| 16 | 1-20 | 1.261 (32.03) | 1.305 (33.15) | 1.230 (31.24) |
| 18 | 1-1/16-18 | 1.337 (33.96) | 1.391 (35.33) | 1.230 (31.24) |
| 20 | 1-3/16-18 | 1.477 (37.52) | 1.531 (38.89) | 1.230 (31.24) |
| 22 | 1-5/16-18 | 1.602 (40.69) | 1.656 (42.06) | 1.230 (31.24) |
| 24 | 1-7/16-18 | 1.723 (43.76) | 1.777 (45.14) | 1.230 (31.24) |

* See page 158 for part numbers.

Plug Assemblies with Backshell †

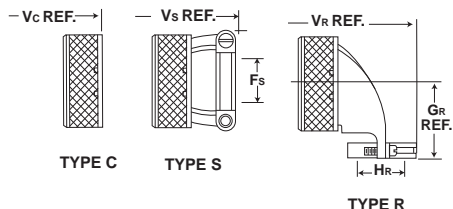

Backshell Assemblies not supplied with MS connectors.

Performance Specifications - Page 158

Contacts, Sealing Plugs, Assembly Tools - Pages 163, 165


Contact Arrangements - Page 162

| Shell Size* | TYPE C | TYPE S | | TYPE R | | |
|-------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | Vc Max. | Fs Max. | Vs Max. | Gr Max. | Hr Max. | Vr Max. |
| 8 | | | | | | |
| 10 | 1.507 (38.28) | .286 (7.26) | 1.857 (47.17) | .880 (22.35) | .286 (7.26) | 2.130 (54.10) |
| 12 | 1.507 (38.28) | .416 (10.57) | 1.857 (47.17) | .950 (24.13) | .416 (10.57) | 2.265 (57.53) |
| 14 | 1.507 (38.28) | .476 (12.09) | 2.092 (53.14) | 1.010 (25.65) | .476 (12.09) | 2.355 (59.82) |
| 16 | 1.507 (38.28) | .626 (15.90) | 2.092 (53.14) | 1.070 (27.18) | .626 (15.90) | 2.490 (63.25) |
| 18 | 1.507 (38.28) | .706 (17.93) | 2.092 (53.14) | 1.130 (28.70) | .706 (17.93) | 2.589 (65.76) |
| 20 | 1.507 (38.28) | .831 (21.11) | 2.092 (53.14) | 1.190 (30.23) | .831 (21.11) | 2.722 (69.14) |
| 22 | 1.507 (38.28) | .956 (24.28) | 2.092 (53.14) | 1.260 (32.00) | .956 (24.28) | 2.845 (72.26) |
| 24 | 1.507 (38.28) | 1.081 (27.46) | 2.092 (52.14) | 1.320 (33.53) | 1.081 (27.46) | 2.967 (75.36) |

* See page 158 for part numbers. † To order backshell assemblies separately, see page 161.

Backshells (Non-MS)

(Not supplied with MS Connectors)

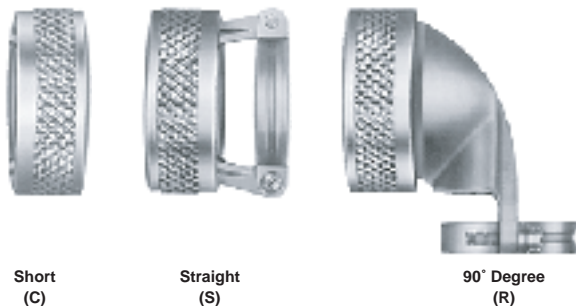

| Shell Size* | TYPE C (SHORT) | TYPE S (Straight) | TYPE R (90°) |
|-------------|---------------------------------------|---------------------------------------|---------------------------------------|
| | ITT CANNON Conductive (Nickel finish) | ITT CANNON Conductive (Nickel finish) | ITT CANNON Conductive (Nickel finish) |
| 10 | 057-0716-002 | 057-0683-002 | 057-0704-001 |
| 12 | 057-0717-002 | 057-0684-002 | 057-0705-001 |
| 14 | 057-0718-002 | 057-0685-002 | 057-0706-001 |
| 16 | 057-0719-002 | 057-0686-002 | 057-0707-001 |
| 18 | 057-0720-002 | 057-0687-002 | 057-0708-001 |
| 20 | 057-0721-002 | 057-0688-002 | 057-0709-001 |
| 22 | 057-0722-002 | 057-0689-002 | 057-0710-001 |
| 24 | 057-0723-002 | 057-0731-002 | 057-0711-001 |

Contact Arrangements


Face view, pin insert

| | | | | | | | | |
|-----------------|----------------|---------------|--------|---------------|--------|---------------|--------|-------|
| Shell Size | 8-33* | 8-98* | 10-6 | 12-3 | 12-8 | 12-10 | 14-4 | 14-5 |
| No. of Contacts | 3-#20 | 3-#20 | 6-#20 | 3-#16 | 8-#20 | 10-#20 | 4-#12 | 5-#16 |
| Service Rating | I | I | I | II | I | I | I | II |
| Shell Size | 14-12 | 14-15 | 14-18 | 14-19 | 16-8 | 16-23 | 16-26 | 18-8 |
| No. of Contacts | 4-#16, 8-#20 | 1-#16, 14-#20 | 18-#20 | 19-#20 | 8-#16 | 1-#16, 22-#20 | 26-#20 | 8-#12 |
| Service Rating | I | I | I | I | II | I | I | I |
| Shell Size | 18-11 | 18-32 | 20-16 | 20-39 | 20-41 | 22-21 | | |
| No. of Contacts | 11-#16 | 32-#20 | 16-#16 | 2-#16, 37-#20 | 41-#20 | 21-#16 | | |
| Service Rating | II | I | II | I | I | II | | |
| Shell Size | 22-41 | 22-55 | 24-19 | 24-31 | 24-61 | | | |
| No. of Contacts | 24-#20, 14-#16 | 55-#20 | 19-#12 | 31-#16 | 61-#20 | | | |
| Service Rating | I | I | II | I | I | | | |

* Layouts are available in shell styles MS3470 and MS3476 only.

Alternate Insert Positions

Face view, pin insert




Contact arrangements requiring reduced diameter for lead-in chamfer on outer row of contact cavities as indicated below.

| Shell | Contact Arrangements | Contact Cavities |
|-------|----------------------|--|
| 8 | 33, 38 | A, B, C |
| 12 | 10 | C, G |
| 14 | 12 | A, B, C, D, E, F, G, and H |
| 14 | 18 | A, C, E, G, J, and L |
| 14 | 19 | B, D, F, H, K, and M |
| 16 | 26 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, and R) |
| 18 | 32 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, and T |
| 22 | 41 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, and Y |

| SHELL SIZE | ARRANGEMENT | POS CODE | | | | |
|------------|-------------|----------|------|------|------|------|
| | | N | W | X | Y | Z |
| 8 | 33 | 0° | 90° | - | - | - |
| | 98 | 0° | - | - | - | - |
| 10 | 6 | 0° | 90° | - | - | - |
| | 3 | 0° | - | - | 180° | - |
| 12 | 8 | 0° | 90° | 112° | 203° | 292° |
| | 10 | 0° | 60° | 155° | 270° | 295° |
| 14 | 4 | 0° | 45° | - | - | - |
| | 5 | 0° | 40° | 92° | 184° | 273° |
| | 12 | 0° | 43° | 90° | - | - |
| | 15 | 0° | 17° | 110° | 155° | 234° |
| | 18 | 0° | 15° | 90° | 180° | 270° |
| 16 | 19 | 0° | 30° | 165° | 315° | - |
| | 8 | 0° | 54° | 152° | 180° | 331° |
| | 23 | 0° | 158° | 270° | - | - |
| | 26 | 0° | 60° | - | 275° | 338° |
| 18 | 8 | 0° | 180° | - | - | - |
| | 11 | 0° | 62° | 119° | 241° | 340° |
| 20 | 32 | 0° | 85° | 138° | 222° | 265° |
| | 16 | 0° | 238° | 318° | 333° | 347° |
| | 39 | 0° | 63° | 144° | 252° | 333° |
| 22 | 41 | 0° | 45° | 126° | 225° | - |
| | 21 | 0° | 16° | 135° | 175° | 349° |
| 24 | 41 | 0° | 39° | 135° | 264° | - |
| | 55 | 0° | 30° | 142° | 226° | 314° |
| 24 | 19 | 0° | 30° | 165° | 315° | - |
| | 31 | 0° | 90° | 225° | 225° | - |
| | 61 | 0° | 90° | 180° | 270° | 324° |

Thru-Bulkhead Receptacle

PV-TBF

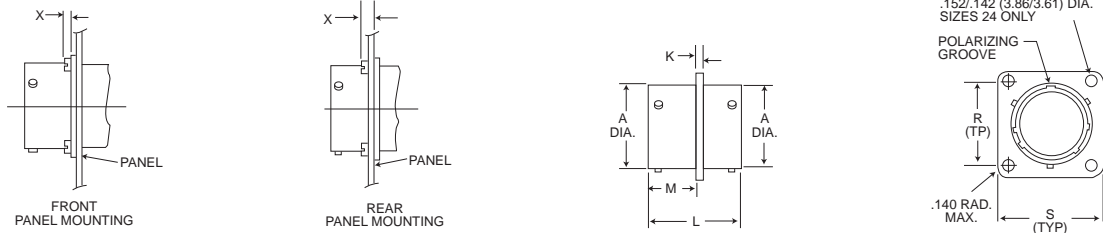

| Shell Size | A Dia $\pm .003$ (0.08) | K $\pm .016$ (0.41) | L Max. | M $\pm .016$ (0.41) | R (TP) | S Max. | X Max. |
|------------|-------------------------|---------------------|---------------|---------------------|---------------|---------------|-------------|
| 8 | .471 (11.96) | .062 (1.57) | 1.125 (28.58) | .577 (14.66) | .594 (15.09) | .828 (21.03) | .218 (5.54) |
| 10 | .588 (14.94) | .062 (1.57) | 1.125 (28.58) | .577 (14.66) | .719 (18.26) | .954 (24.23) | .218 (5.54) |
| 12 | .748 (19.00) | .062 (1.57) | 1.125 (28.58) | .577 (14.66) | .812 (20.62) | 1.047 (26.59) | .218 (5.54) |
| 14 | .873 (22.17) | .062 (1.57) | 1.125 (28.58) | .577 (14.66) | .906 (23.01) | 1.141 (28.98) | .218 (5.54) |
| 16 | .998 (25.35) | .062 (1.57) | 1.125 (28.58) | .577 (14.66) | .969 (24.61) | 1.234 (31.34) | .218 (5.54) |
| 18 | 1.123 (28.52) | .062 (1.57) | 1.125 (28.58) | .577 (14.66) | 1.062 (26.97) | 1.328 (33.73) | .218 (5.54) |
| 20 | 1.248 (31.70) | .094 (2.39) | 1.406 (35.71) | .703 (17.86) | 1.156 (29.36) | 1.453 (36.91) | .344 (8.74) |
| 22 | 1.373 (34.87) | .094 (2.39) | 1.406 (35.71) | .703 (17.86) | 1.250 (31.75) | 1.578 (40.08) | .344 (8.74) |
| 24 | 1.498 (38.05) | .094 (2.39) | 1.406 (35.71) | .703 (17.86) | 1.375 (34.92) | 1.703 (43.26) | .311 (7.90) |

Notes: 1) Shell available in conductive (nickel finish) only. 2) Contacts are nonremovable.

How to Order - PV-TBF

SERIES PREFIX

PV-TBF - ITT Cannon prefix

SHELL SIZE

8 through 24

INSERT ARRANGEMENTS

10-6, 14-19, 16-8, 16-26, 18-32, 20-39, 20-41, 22-41, 22-55, 24-61.

SERIES PREFIX

SHELL SIZE

INSERT ARRANGEMENTS

CONTACT STYLE

ALTERNATE POLARIZING POSITION

CONTACT STYLE

Pin and socket

ALTERNATE POLARIZING POSITION

No designation required for normal. Standard MS alternate positions available.

Notes: 1) Shell available in conductive (nickel finish) only.
2) Contacts are nonremovable.
3) Designed to MS3119 configuration and meets the performance requirements of MIL-C-26482 Series 2.

PV-TBF 10 -6 PS W

Tooling



Crimp Tool
M22520/1-01 Crimp Tool
with M22520/1-02 Turret



Insertion/Extraction Tools




CBT 520/530


| Contact Size | Wire Contact Tools | | | | | Unwired Contact Tools Cannon Pt. No. |
|--------------|------------------------------|--------------------|---------------------|----------------------|-----------------------------------|---|
| | Cannon Part Number | M81969 Part Number | Insertion Color Tip | Extraction Color Tip | Superseded Mil. Pt. No. | |
| 20 | CIET-20-11 (274-7001-006) | M81969/14-11 | Red | White | MS27534-20, MS3447-20, NAS1664-20 | 274-7007-000 |
| 16 | CIET-16-03 (274-7002-000) | M81969/14-03 | Blue | White | MS27534-16, MS3447-16, NAS1664-16 | 274-7008-000 |
| 12 | CIET-12-04 (274-7003-000) | M81969/14-04 | Yellow | White | MS27534-12, MS3447-12, NAS1664-12 | 274-7009-000 |

Panel Cutouts

Jam Nut Receptacle



Narrow Flange and Thru-Bulkhead/Wide Flange

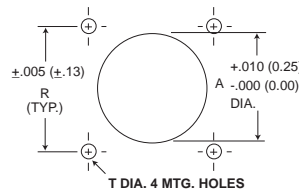

| Shell Size | E ±.005 (0.13) | F Dia. ±.005 (0.13) |
|------------|-------------------|------------------------|
| 10 | .661 (16.79) | .697 (17.70) |
| 12 | .824 (20.93) | .895 (22.73) |
| 14 | .948 (24.08) | 1.010 (25.65) |
| 16 | 1.072 (27.23) | 1.135 (28.33) |
| 18 | 1.197 (30.40) | 1.260 (32.00) |
| 20 | 1.322 (33.58) | 1.385 (35.18) |
| 22 | 1.447 (36.75) | 1.510 (38.35) |
| 24 | 1.572 (39.93) | 1.635 (41.53) |


| Shell Size | Flange Front and Rear Mounting | | Mounting Hole | |
|------------|--------------------------------|---------------|---------------|------------|
| | A Dia. | R | T Dia. | Screw Size |
| 8 | .620 (15.75) | .594 (18.26) | .125 (3.14) | #4 |
| 10 | .740 (18.80) | .719 (18.26) | .125 (3.17) | #4 |
| 12 | .864 (21.95) | .812 (20.62) | .125 (3.17) | #4 |
| 14 | .990 (25.15) | .906 (23.01) | .125 (3.17) | #4 |
| 16 | 1.118 (28.40) | .969 (24.61) | .125 (3.17) | #4 |
| 18 | 1.240 (31.50) | 1.062 (26.97) | .125 (3.17) | #4 |
| 20 | 1.366 (34.70) | 1.156 (29.36) | .125 (3.17) | #4 |
| 22 | 1.490 (37.85) | 1.250 (31.75) | .125 (3.17) | #4 |
| 24 | 1.616 (41.05) | 1.375 (34.92) | .155 (3.97) | #6 |

| Shell Size | Flange Front and Rear Mounting | | Mounting Hole | |
|------------|--------------------------------|---------------|---------------|------------|
| | A Dia. | R | T Dia. | Screw Size |
| 10 | .740 (18.80) | .812 (20.62) | .155 (3.97) | #6 |
| 12 | .864 (21.95) | .938 (23.93) | .155 (3.97) | #6 |
| 14 | .990 (25.15) | 1.031 (26.19) | .155 (3.97) | #6 |
| 16 | 1.118 (28.40) | 1.125 (28.58) | .155 (3.97) | #6 |
| 18 | 1.240 (31.50) | 1.203 (30.56) | .155 (3.97) | #6 |
| 20 | 1.366 (34.70) | 1.297 (32.94) | .155 (3.97) | #6 |
| 22 | 1.490 (37.85) | 1.375 (34.92) | .155 (3.97) | #6 |
| 24 | 1.616 (41.05) | 1.500 (38.10) | .155 (3.97) | #6 |


Panel Thickness

Shown here are the maximum panel thickness including screw head height allowable to ensure complete connector operation.

Narrow Flange Receptacle

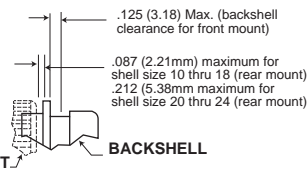


Wide Flange Receptacle

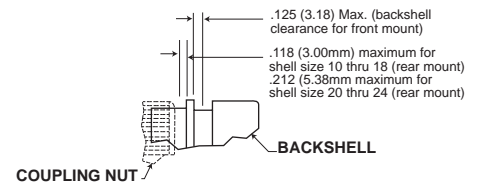



Dummy Stowage Receptacles

How to Order

PV DESCRIPTION

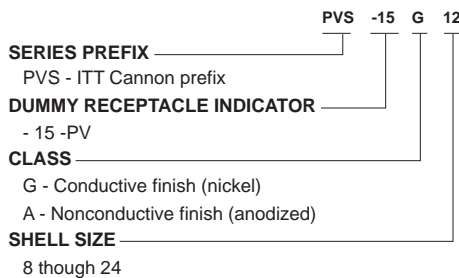

MS DESCRIPTION

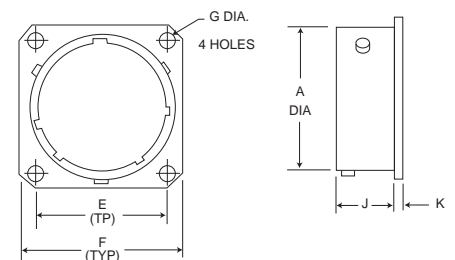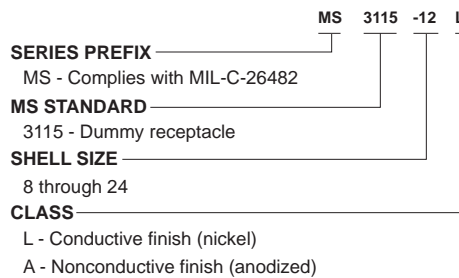


NOTE: Usable on KPT/KPSE series also.


| Shell Size | A Dia. Max. | E (TYP) | F Max. | G Max. | J Max. | K Max. |
|------------|---------------|---------------|---------------|-------------|--------------|-------------|
| 8 | .474 (12.04) | .594 (15.09) | .828 (21.03) | .125 (3.18) | .493 (12.52) | .078 (1.98) |
| 10 | .591 (15.01) | .719 (18.26) | .954 (24.23) | .125 (3.18) | .493 (12.52) | .078 (1.98) |
| 12 | .751 (19.08) | .812 (20.62) | 1.047 (26.59) | .125 (3.18) | .493 (12.52) | .078 (1.98) |
| 14 | .876 (22.25) | .906 (23.01) | 1.141 (28.98) | .125 (3.18) | .493 (12.52) | .078 (1.98) |
| 16 | 1.001 (25.43) | .969 (24.61) | 1.234 (31.34) | .125 (3.18) | .493 (12.52) | .078 (1.98) |
| 18 | 1.126 (28.60) | 1.062 (26.97) | 1.328 (33.73) | .125 (3.18) | .493 (12.52) | .078 (1.98) |
| 20 | 1.251 (31.78) | 1.156 (29.36) | 1.453 (36.91) | .125 (3.16) | .587 (14.91) | .110 (2.79) |
| 22 | 1.376 (34.95) | 1.250 (31.75) | 1.578 (40.08) | .125 (3.18) | .587 (14.91) | .110 (2.79) |
| 24 | 1.501 (38.13) | 1.375 (34.92) | 1.703 (43.26) | .152 (3.86) | .620 (15.75) | .110 (2.79) |

Protective Metal Caps

Plugs

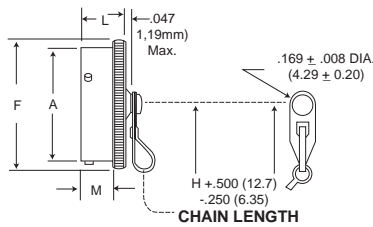

Receptacles

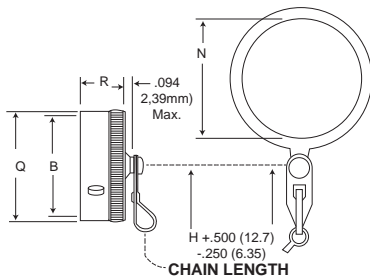

SERIES PREFIX

PVS - ITT Cannon Prefix
MS - Complies with MIL-C-26482 (Series 2)

TYPE

80 or 3180 - Plug Cap
81 or 3181 - Receptacle Cap

SHELL SIZE

8 thru 24

TERMINATION STYLE

C - Sash chain (MS approved)
N - Sash chain with ring (81 or 3181 type only) MS approved

FINISH

A - Hard anodic, non-conductive (MS approved)
G - Nickel, conductive (not MS) (PVS only)

NOTE: Usable on KPT/KPSE series also.
N style used primarily on Jam Nut Receptacle.

PVS 80 -12 C A
MS 3180 -12 C A

| Shell Size | A Max. Dia. | B Max. | F Max. Dia. | H | L Max. | M Max. | N Min. Dia. | Q Max. | R Max. |
|------------|---------------|---------------|---------------|----------------|--------------|--------------|---------------|---------------|--------------|
| 8 | .474 (12.04) | .486 (12.34) | .719 (18.26) | 3.000 (76.20) | .562 (14.27) | .399 (10.13) | .578 (14.68) | .734 (18.64) | .562 (14.27) |
| 10 | .591 (15.01) | .607 (15.42) | .844 (21.44) | 3.000 (76.20) | .562 (14.27) | .399 (10.13) | .703 (17.86) | .859 (21.82) | .562 (14.27) |
| 12 | .751 (19.08) | .766 (19.46) | 1.000 (25.40) | 3.500 (76.20) | .562 (14.27) | .399 (10.13) | .891 (22.63) | 1.000 (25.40) | .562 (14.27) |
| 14 | .876 (22.25) | .890 (22.60) | 1.125 (28.58) | 3.500 (88.90) | .562 (14.27) | .399 (10.13) | 1.016 (25.81) | 1.125 (28.58) | .562 (14.27) |
| 16 | 1.001 (25.43) | 1.015 (25.78) | 1.250 (31.75) | 3.500 (88.90) | .562 (14.27) | .399 (10.13) | 1.141 (28.98) | 1.250 (31.75) | .562 (14.27) |
| 18 | 1.126 (28.60) | 1.141 (28.98) | 1.375 (34.93) | 3.500 (88.90) | .562 (14.27) | .399 (10.13) | 1.266 (32.16) | 1.375 (34.93) | .562 (14.27) |
| 20 | 1.251 (31.78) | 1.265 (32.13) | 1.500 (38.10) | 4.000 (101.60) | .625 (15.88) | .461 (11.71) | 1.391 (35.33) | 1.500 (38.10) | .562 (14.27) |
| 22 | 1.376 (34.96) | 1.390 (35.31) | 1.625 (41.26) | 4.000 (101.60) | .625 (15.88) | .461 (11.71) | 1.516 (38.51) | 1.625 (41.26) | .562 (14.27) |
| 24 | 1.501 (38.13) | 1.515 (38.48) | 1.750 (44.45) | 4.000 (101.60) | .658 (16.71) | .494 (12.55) | 1.641 (41.68) | 1.750 (44.45) | .602 (15.29) |

Contacts

Thermocouple Contacts

| Contact Size | Type | M39029 Number | Color Brands | | | ITT Cannon |
|--------------|--------|---------------|--------------|-------|--------|--------------|
| | | | 1st | 2nd | 3rd | |
| 20 | Socket | M39029/5-115 | Brown | Brown | Green | 031-9174-004 |
| 20 | Pin | M39029/4-110 | Brown | Brown | Black | 030-9173-006 |
| 16 | Socket | M39029/5-116 | Brown | Brown | Blue | 031-9206-006 |
| 16 | Pin | M39029/4-111 | Brown | Brown | Brown | 030-9205-007 |
| 12 | Socket | M39029/5-118 | Brown | Brown | Grey | 031-9186-003 |
| 12 | Pin | M39029/4-113 | Brown | Brown | Orange | 030-9185-003 |

| Contact Size | Alumel | Chromal |
|--------------|--------------|--------------|
| 20 Pin | 030-1831-000 | 030-1832-000 |
| 20 Socket | 031-1013-000 | 031-1014-000 |

Contacts for printed circuit applications are also available. Consult factory.


Wire Hole Fillers



| Contact Size | Part Number | | | Color Code |
|--------------|--------------|------------|---------------------------|------------|
| | Cannon | Military | Superseded Mil. Pt. No. | |
| 20 | 225-0070-000 | MS27488-20 | MS3187-20 M83723/28-20 | Red |
| 16 | 225-0071-000 | MS27488-16 | MS3187-16 M83723/28-16 | Blue |
| 12 | 225-0072-000 | MS27488-12 | MS3187-12 M83723/28-12 | Yellow |

Assembly Procedures

STRIPPING AND CRIMPING

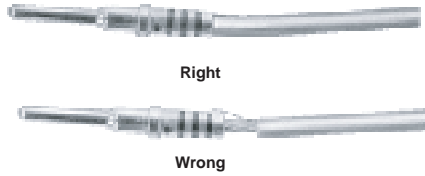

1. Strip wires according to contact size: 3/16" for #20 and 9/32" for #16 and #12. #20 contacts accommodate AWG wire sizes 20, 22, or 24; #16 accommodates 16, 18 or 20; and #12 accommodates 12 or 14.

2. Insert wire into rear of contact. Wire insulation must butt against rear of contact. Wire must be visible thru inspection hole.

3. Use M22520/1-01 crimp tool with proper crimp locator M22520/1-02. The color code hand on the contact (red for #20, blue for #16 and yellow for #12) must match the color code of the locator and the insertion tool throughout the crimping and assembly operations.



CONTACT INSERTION




OPENING

COLORED END FOR INSERTION

4. Insert contact and wire into tool jaws. To crimp, squeeze handles together fully until ratchet release and allows handles to expand; otherwise, contact cannot be extracted from tool jaws. Maintain slight insertion pressure on wire while crimping contact to wire.

1. Remove backshell and put wired contacts thru cable clamp opening.

2. Used colored end of CIET tool for insertion. Place wire into tool at large opening. To facilitate contact insertion, a 6-in. min. free length of wire is recommended.

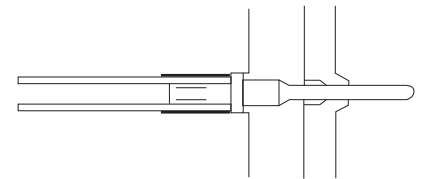

3. Slide back tool on wire while holding thumb against wire at opening. Wire will slip into tool.

NOTE: Socket contacts should be inserted partially into grommet by hand before using insertion tool.

4. With tool pressed against shoulder of contact, starting at the center cavity, insert wired contact and tool into properly identified cavity at rear of plug with firm, even pressure. Do not use excessive pressure.

5. When contact bottoms, a slight click can be heard as tines of metal retaining clip snaps into place behind contact shoulder.




CONTACT EXTRACTION



6. Withdraw tool from rear of plug. To be sure that contact is locked, pull back lightly on wire. Then remove tool from wire and proceed with other contacts.

7. After all contacts are inserted, fill unwired cavities with sealing plugs (insert head last and leave end protruding for ease of removal), assemble backshell on rear of connector.

1. Remove backshell and slide back along wires to allow access. To extract a contact, use white end of CIET tool. Place wire into tool at large opening. Slide back tool on wire while holding thumb against wire at opening. Wire will slip into tool.

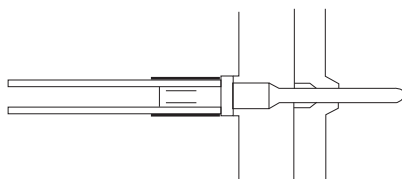

COMPLETION

BROKEN CIRCLE

BREAK

2. Push tool into rear of plug until it bottoms. At this point, tool releases tines on retaining clip so that contact can be extracted.

3. While maintaining slight insertion force on tool, firmly hold wire against serrated shoulder at center of tool and extract both wired contact and tool from plug.

4. Check face of plug or receptacle for proper contact installation. In socket inserts with a large number of contact, cavities are identified in a spiral pattern. A projecting line from the spiral indicates omission of a letter; a broken circle around a cavity indicates transition between capitals and lower case and double letters.