213

2.80

FCI CONFIDENTIAL

	PRODUCT						DIMANA
	NUMBER		NO. OF POS	DIM K	DIM J	DIM C	DIM W DIM Z
	78211-003	LF	3	7 <u>.</u> 47	5.08	1.35	0.05
	78211-004	LF	4	10 <u>.</u> 01	7.62	1.35	0.05
	78211-005	LF	5	12.55	10.16	1.35	0.05
	78211-006	LF	6	15.09	12.70	1.35	0.10
	78211-007	LF	7	17.63	15.24	1.35	0.10
	78211-008	LF	8	20.17	17.78	1.35	0.10
	78211-009	LF	9	22 <u>.</u> 71	20.32	1.35	0.10
	78211-010	LF	10	25.25	22.86	1.35	0.10
	78211-011	LF	11	27.79	25.40	1.35	0.15
	78211-012	LF	12	30.33	27.94	1.35	0.15
	78211-013	LF	13	32.87	30.48	1.35	0.15
	78211-014	LF	14	35.41	33.02	1.35	0.15
	78211-015	LF	15	37.95	35.56	1.35	0.15
	78211-103	LF	3	7.47	5.08	2.54	0.05
	78211-105	LF	5	12.55	10.16	2.54	0.05
	78211-106	LF	6	15.09	12.70	2.54	0.10

11

NOTES:

ບີ້

rr is the property of and embodies CONFIDENTIAL f information of FCL. No part of the information ment may be used in any way ar disclosed to written consent of FCL.

1. MOLDING MATERIAL

## MODIFIED POLYPHELYNENE COLOR BLACK, UL 94 VO

2

2. LATCH MUST WITHSTAND 18N MIN PULL OUT FORCE


- 3. STANDARD PACKAGING IN POLYBAGS
- 4. TERMINALS MUST BE CRIMPED PROPERLY FOR SATISFACTORY LATCHING :
  - FOR CRIMPING INSTRUCTIONS, SEE TA-75 AND TA-295 - FOR TERMINAL APPLICATION SEE TA-531.

PRODUCT SPECIFICATION: BUS-12-067.

- 5. THIS HOUSING IS INTENDED FOR USE WITH MINI PV TERMINAL WITH 22-36 GAUGE WIRE
- 6. RoHs COMPLIANT PRODUCT SPECIFICATIONS :

1

- MEETS PACKAGING SPECS AS PER GS-14-920
- PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

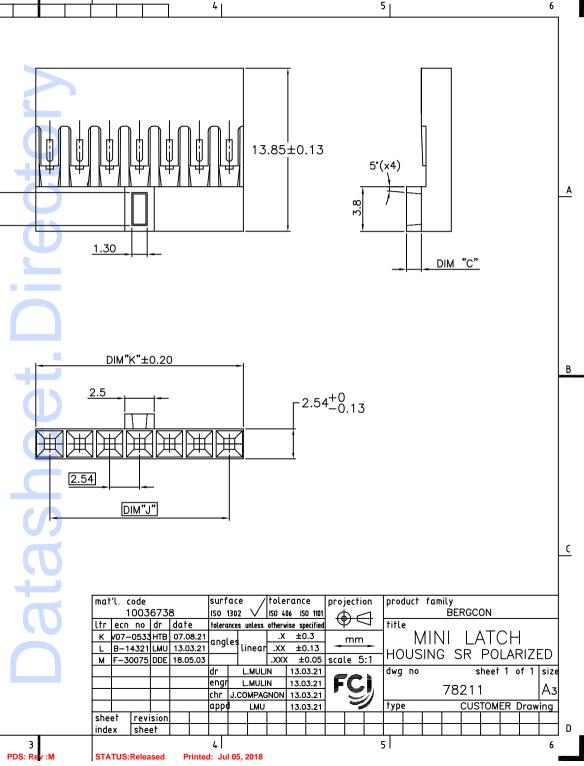

form: A3

D