


## Unidirectional and Bidirectional Transient Voltage Suppressor

- High Reliability controlled devices
- Economical series for thru hole mounting
- Unidirectional (A) and Bidirectional (CA) construction
- Selections for 6.8 to 400 V standoff voltages ( $V_{WM}$ )

DEVICES	M1.5KE6.8A thru M1.5KE400CA, e3	LEVELS M, MA, MX, MXL
<b>FEATURES</b>		  CASE 1
<ul style="list-style-type: none"> <li>▪ High reliability controlled devices with wafer fabrication and assembly lot traceability</li> <li>▪ 100 % surge tested devices</li> <li>▪ Suppresses transients up to 1500 watts @ 10/1000 <math>\mu</math>s</li> <li>▪ Optional upscreening available by replacing the M prefix with MA, MX or MXL. These prefixes specify various screening and conformance inspection options based on MIL-PRF-19500. Refer to <a href="#">MicroNote 129</a> for more details on the screening options.</li> <li>▪ Surface mount equivalent packages are available as MSMC(G)(J)5.0A - SMC(G)(J)170CA (consult factory for other surface mount options)</li> <li>▪ Moisture classification is Level 1 with no dry pack required per IPC/JEDEC J-STD-020B</li> <li>▪ RoHS Compliant devices available by adding "e3" suffix</li> <li>▪ 3<math>\sigma</math> lot norm screening performed on Standby Current <math>I_b</math></li> </ul>		
<b>APPLICATIONS / BENEFITS</b>		
<ul style="list-style-type: none"> <li>▪ Protection from switching transients and induced RF</li> <li>▪ Protection from ESD and EFT per IEC 61000-4-2 and IEC 61000-4-4 with fast response</li> <li>▪ Secondary lightning protection per IEC 61000-4-5 with 42 Ohms source impedance:             <ul style="list-style-type: none"> <li>○ Class 1: M1.5KE6.8A to M1.5KE200CA</li> <li>○ Class 2: M1.5KE5.0A to M1.5KE180CA</li> <li>○ Class 3: M1.5KE5.0A to M1.5KE91CA</li> <li>○ Class 4: M1.5KE5.0A to M1.5KE43CA</li> </ul> </li> <li>▪ Secondary lightning protection per IEC61000-4-5 with 12 Ohms source impedance:             <ul style="list-style-type: none"> <li>○ Class 1 : M1.5KE5.0A to M1.5KE110CA</li> <li>○ Class 2: M1.5KE5.0A to M1.5KE56CA</li> <li>○ Class 3: M1.5KE5.0A to M1.5KE27ACA</li> <li>○ Class 4: M1.5KE5.0A to M1.5KE13CA</li> </ul> </li> <li>▪ Secondary lightning protection per IEC61000-4-5 with 2 Ohms source impedance:             <ul style="list-style-type: none"> <li>○ Class 2: M1.5KE5.0A to M1.5KE24CA</li> <li>○ Class 3: M1.5KE5.0A to M1.5KE12CA</li> </ul> </li> </ul>		
<b>MAXIMUM RATINGS</b>		
<ul style="list-style-type: none"> <li>▪ Peak Pulse Power dissipation at 25 °C: 1500 watts at 10/1000 <math>\mu</math>s (also see Figures 1, 2, and 3) with impulse repetition rate (duty factor) of 0.01 % or less</li> <li>▪ <math>t_{clamping}</math> (0 volts to <math>V_{BR}</math> min.): &lt; 100 ps theoretical for unidirectional and &lt; 5 ns for bidirectional</li> <li>▪ Operating and Storage temperature: -65 °C to +150 °C</li> <li>▪ Thermal Resistance: 22 °C/W junction to lead at 3/8 inch (10 mm) from body, or 82 °C/W junction to ambient when mounted on FR4 PC board with 4 mm<sup>2</sup> copper pads (1oz) and track width 1 mm, length 25 mm</li> <li>▪ Steady-State Power dissipation: 5 watts at <math>T_L = 40</math> °C, or 1.52 watts at <math>T_A = 25</math> °C when mounted on FR4 PC board described for thermal resistance</li> <li>▪ Forward Surge: 200 Amps peak impulse of 8.3 ms half-sine wave at 25°C (unidirectional only).</li> <li>▪ Solder temperatures: 260 °C for 10 s (maximum)</li> </ul>		

## MECHANICAL AND PACKAGING

- Void-free transfer molded thermosetting epoxy body meeting UL94V-0
- Tin-Lead (90 % Sn, 10 % Pb) or RoHS (100% Sn) Compliant annealed matte-Tin plating readily solderable per MIL-STD-750, method 2026
- Body marked with part number
- Cathode indicated by band. No cathode band on bi-directional devices.
- Available in bulk or custom tape-and-reel packaging
- TAPE-AND-REEL standard per EIA-296 (add "TR" suffix to part number)
- WEIGHT: 1.5 gram (approximate)

## PACKAGE DIMENSIONS



**NOTE:** Cathode indicated by band  
 All dimensions in inches  
 millimeters

## SYMBOLS & DEFINITIONS

Symbol	Definition	Symbol	Definition
$V_{WM}$	Working Peak (Standoff) Voltage	$I_{PP}$	Peak Pulse Current
$P_{PP}$	Peak Pulse Power	$V_C$	Clamping Voltage
$V_{BR}$	Breakdown Voltage	$I_{BR}$	Breakdown Current for $V_{BR}$
$I_D$	Standby Current		

## ELECTRICAL CHARACTERISTICS @ 25°C

Industry Type Number (Note 2)	JEDEC Type Number	Rated Standoff Voltage $V_{WM}$ (Note 1)	Breakdown Voltage		Maximum Clamping Voltage $V_C$ @ $I_{FP}$	Maximum Standby Current $I_D$ @ $V_{WM}$	Peak Pulse Current (see Fig. 2) $I_{PP}$	Maximum Temperature Coefficient of $V_{BR}$ ( $\alpha_{V(BR)}$ )
			$V_{BR}$ @	$I_{BR}$				
			V	mA				
M1.5KE6.8A	1N6267A	5.80	6.45 – 7.14	10	10.5	1000	143.0	.057
M1.5KE7.5A	1N6268A	6.40	7.13 – 7.88	10	11.3	500	132.0	.061
M1.5KE8.2A	1N6269A	7.02	7.79 – 8.61	10	12.1	200	124.0	.065
M1.5KE9.1A	1N6270A	7.78	8.65 – 9.55	1	13.4	50	112.0	.068
M1.5KE10A	1N6271A	8.55	9.50 – 10.50	1	14.5	10	103.0	.073
M1.5KE11A	1N6272A	9.40	10.50 – 11.60	1	15.6	5	96.0	.075
M1.5KE12A	1N6273A	10.220	11.40 – 12.60	1	16.7	5	90.0	.078
M1.5KE13A	1N6274A	11.10	12.40 – 13.70	1	18.2	5	82.0	.081
M1.5KE15A	1N6275A	12.80	14.30 – 15.80	1	21.2	1	71.0	.084
M1.5KE16A	1N6276A	13.60	15.20 – 16.80	1	22.5	1	67.0	.086
M1.5KE18A	1N6277A	15.30	17.10 – 18.90	1	25.2	1	59.5	.088
M1.5KE20A	1N6278A	17.10	19.00 – 21.00	1	27.7	1	54.0	.090
M1.5KE22A	1N6279A	18.80	20.90 – 23.10	1	30.6	1	49.0	.092
M1.5KE24A	1N6280A	20.50	22.80 – 25.20	1	33.2	1	45.0	.094
M1.5KE27A	1N6281A	23.10	25.70 – 28.40	1	37.5	1	40.0	.096
M1.5KE30A	1N6282A	25.60	28.50 – 31.50	1	41.4	1	36.0	.097
M1.5KE33A	1N6283A	28.20	31.40 – 34.70	1	45.7	1	33.0	.098
M1.5KE36A	1N6284A	30.80	34.20 – 37.80	1	49.9	1	30.0	.099
M1.5KE39A	1N6285A	33.30	37.10 – 41.00	1	53.9	1	28.0	.100
M1.5KE43A	1N6286A	36.80	40.90 – 45.20	1	59.3	1	25.3	.101
M1.5KE47A	1N6287A	40.20	44.70 – 49.40	1	64.8	1	23.2	.101
M1.5KE51A	1N6288A	43.60	48.50 – 53.60	1	70.1	1	21.4	.102
M1.5KE56A	1N6289A	47.80	53.20 – 58.80	1	77.0	1	19.5	.103
M1.5KE62A	1N6290A	53.00	58.90 – 65.10	1	85.0	1	17.7	.104
M1.5KE68A	1N6291A	58.10	64.60 – 71.40	1	92.0	1	16.3	.104
M1.5KE75A	1N6292A	64.10	71.30 – 78.80	1	103.0	1	14.6	.105
M1.5KE82A	1N6293A	70.10	77.90 – 86.10	1	113.0	1	13.3	.105
M1.5KE91A	1N6294A	77.80	86.50 – 95.50	1	125.0	1	12.0	.106
M1.5KE100A	1N6295A	85.50	95.00 – 105.00	1	137.0	1	11.0	.106
M1.5KE110A	1N6296A	94.00	105.00 – 116.00	1	152.0	1	9.9	.107
M1.5KE120A	1N6297A	102.00	114.00 – 126.00	1	165.0	1	9.1	.107
M1.5KE130A	1N6298A	111.00	124.00 – 137.00	1	179.0	1	8.4	.107
M1.5KE150A	1N6299A	128.00	143.00 – 158.00	1	207.0	1	7.2	.108
M1.5KE160A	1N6300A	136.00	152.00 – 168.00	1	219.0	1	6.8	.108
M1.5KE170A	1N6301A	145.00	162.00 – 179.00	1	234.0	1	6.4	.108
M1.5KE180A	1N6303A	154.00	171.00 – 189.00	1	246.0	1	6.1	.108
M1.5KE200A	-	171.00	190.00 – 210.00	1	274.0	1	5.5	.108
M1.5KE220A	-	185.00	209.00 – 231.00	1	328.0	1	4.6	.110
M1.5KE250A	-	214.00	237.00 – 263.00	1	344.0	1	5.0	.110
M1.5KE300A	-	256.00	285.00 – 315.00	1	414.0	1	5.0	.111
M1.5KE350A	-	300.00	332.00 – 368.00	1	482.0	1	4.0	.111
M1.5KE400A	-	324.00	380.00 – 420.00	1	548.0	1	4.0	.111

**NOTE 1:** Normal selection criteria for TVS devices is by rated stand-off voltage ( $V_{WM}$ ) and should be equal or greater than dc or continuous peak operating voltage.

**NOTE 2:** For bidirectional construction, indicate a CA as suffix after part number (e.g. M1.5KE33CA). For Bidirectional types having  $V_{WM}$  of 8 volts and under, the  $I_D$  leakage current is doubled. Bidirectional capacitance is half that shown in Figure 4 at zero volts.

**NOTE 3:** For unidirectional, the forward voltage ( $V_F$ ) is 3.5 volts maximum at 100 Amps peak for 8.3 ms half-sine wave.

## GRAPHS



FIGURE 1 – Peak Pulse Power vs. Pulse Time ( $t_w$ ) in  $\mu s$

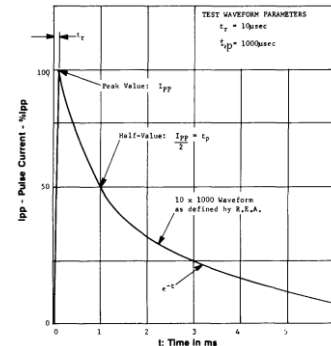


FIGURE 2 Pulse Wave Form



FIGURE 3 Derating Curve

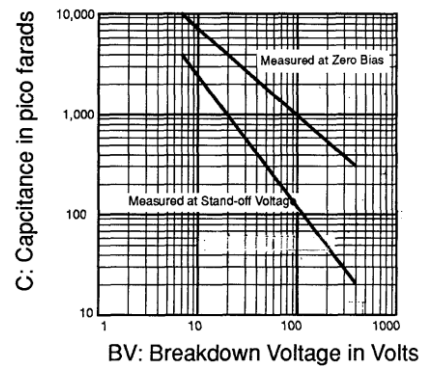


FIGURE 4 Typical Capacitance vs. Breakdown Voltage