



Panasonic


ideas for life

DIP 6-pin type with new-generation MOS capable of 2A to 3A high-frequency load switching.

PhotoMOS[®]
HE 1 Form A
High Capacity



mm inch



RoHS compliant

FEATURES

- Greatly increased load current in a compact DIP package**
Continuous load current: 3.5A (AQV251G)
- Greatly improved specifications allow you to use this in place of mercury and mechanical relays.**
- Low on-resistance (typ. 35mΩ, AQV251G)**

TYPICAL APPLICATIONS

- **Measuring instrument market** (Testers etc.)
- **Industrial machinery and equipment**
- **Power supply controls**
- **Security/Disaster prevention market** I/O sections of warning devices, security systems, etc.

TYPES

	Output rating*		Package	Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal			Tube	Tape and reel
	Load voltage	Load current	Tube packing style	Tape and reel packing style					
				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side				
AC/DC dual use	30 V	3.5 A	DIP6-pin	AQV251G	AQV251GA	AQV251GAX	AQV251GAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.
	60 V	2.5 A	DIP6-pin	AQV252G	AQV252GA	AQV252GAX	AQV252GAZ		

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item	Symbol	Type of connection	AQV251G(A)		AQV252G(A)		Remarks
			A	B, C	A	B, C	
Input	LED forward current	I_F	50 mA				
	LED reverse voltage	V_R	5 V				
	Peak forward current	I_{FP}	1 A				f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P_{in}	75 mW				
Load voltage (peak AC)	V_L		30 V		60 V		
Output	Continuous load current	I_L	A	3.5 A		2.5 A	A connection: Peak AC, DC B, C connection: DC
	Peak load current	I_{peak}	B	4.0 A		3.5 A	
	Power dissipation	P_{out}	C	6.0 A		5.0 A	
Total power dissipation	P_T		6.0 A				100ms (1 shot), $V_L = DC$
I/O isolation voltage	V_{iso}		600 mW				
Temperature limits	Operating	T_{opr}	650 mW				
	Storage	T_{stg}	1,500 V AC				
			-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures
			-40°C to +100°C -40°F to +212°F				

HE 1 Form A High Capacity

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV251G(A)	AQV252G(A)	Condition	
Input	LED operate current	Typical	I _{Fon}	—	0.55 mA	0.5 mA	
		Maximum			3 mA	3 mA	
	LED turn off current	Minimum	I _{Foff}	—	0.2 mA	0.2 mA	
		Typical			0.45 mA	0.45 mA	
LED dropout voltage	Typical	V _F	—	1.14 V (1.32 V at I _F = 50 mA)		I _F = 5 mA	
	Maximum			1.5 V			
Output	On resistance	Typical	R _{on}	A	0.035 Ω	0.08 Ω	
		Maximum			0.08 Ω	0.12 Ω	
		Typical	R _{on}	B	0.018 Ω	0.04 Ω	
		Maximum			0.04 Ω	0.06 Ω	
		Typical	R _{on}	C	0.01 Ω	0.02 Ω	
		Maximum			0.02 Ω	0.03 Ω	
Off state leakage current	Maximum	I _{Leak}	—	1 μA		I _F = 0 mA, V _L = Max.	
Transfer characteristics	Turn on time*	Typical	T _{on}	—	1.1 ms		I _F = 5 mA, I _L = 100 mA V _L = 10 V
		Maximum			5.0 ms		
	Turn off time*	Typical	T _{off}	—	0.1 ms	0.25 ms	I _F = 5 mA, I _L = 100 mA V _L = 10 V
		Maximum			0.5 ms		
	I/O capacitance	Typical	C _{iso}	—	0.8 pF		f = 1 MHz V _B = 0 V
Maximum		1.5 pF					
Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ		500 V DC	

*Turn on/Turn off time

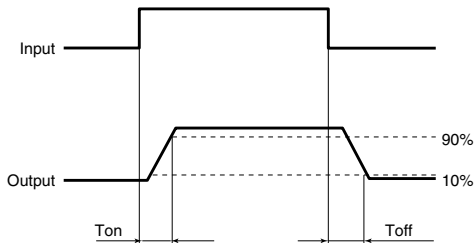

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	5 to 10	mA

- For Dimensions.
- For Schematic and Wiring Diagrams.
- For Cautions for Use.

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

For more information.

REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics

Tested sample: AQV251G;
Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

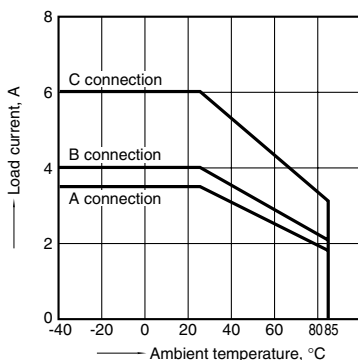


1.-(2) Load current vs. ambient temperature characteristics

Tested sample: AQV252G;
Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

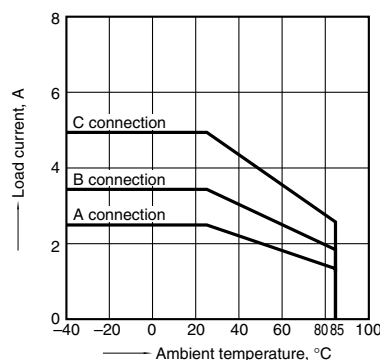


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max.(DC)

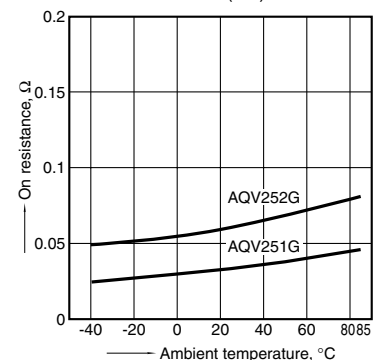


3. Turn on time vs. ambient temperature characteristics

Tested sample: All; LED current: 5 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

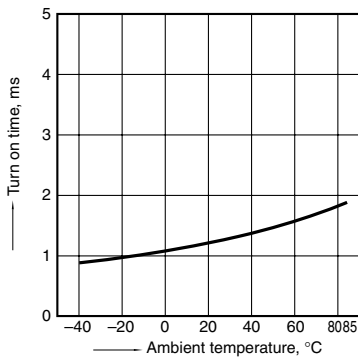


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

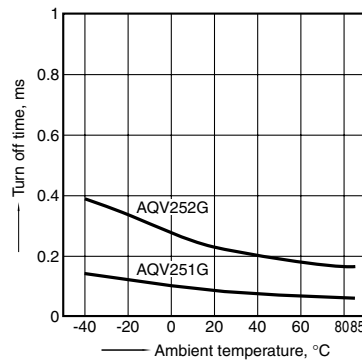


5. LED operate current vs. ambient temperature characteristics

Tested sample: All; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

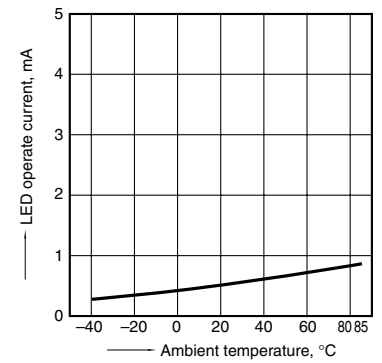


6. LED turn off current vs. ambient temperature characteristics

Tested sample: All; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

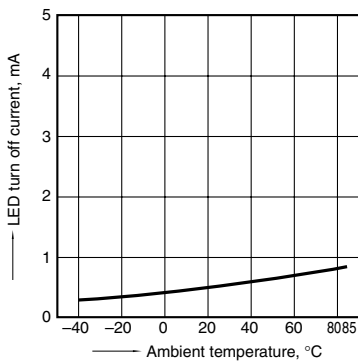


7. LED dropout voltage vs. ambient temperature characteristics

Tested sample: All; LED current: 5 to 50 mA

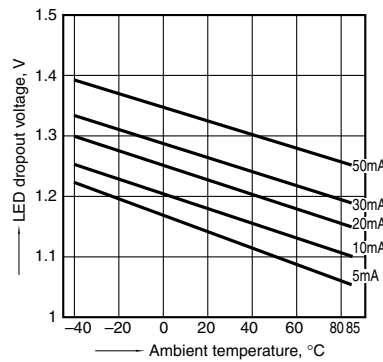


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

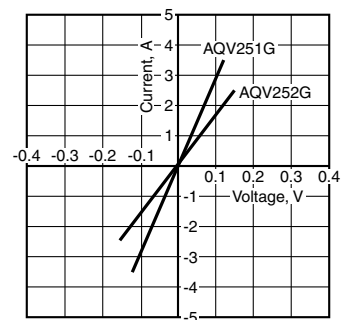


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

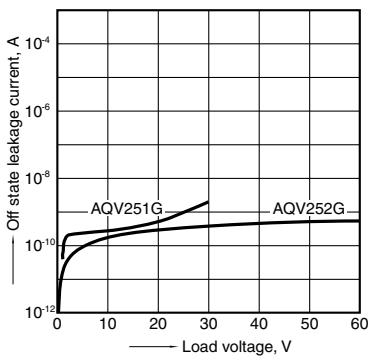


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6; Tested sample: All; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

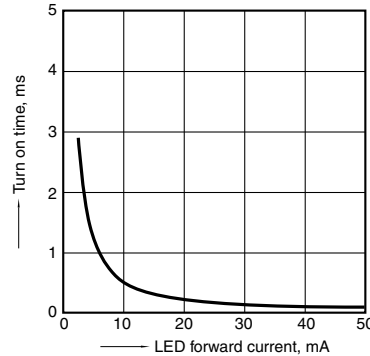


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

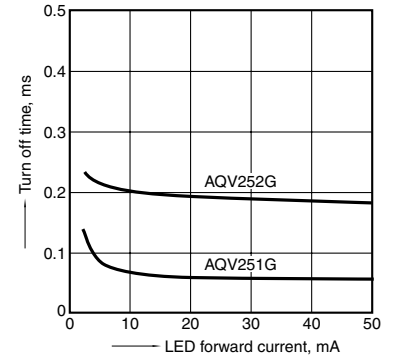

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

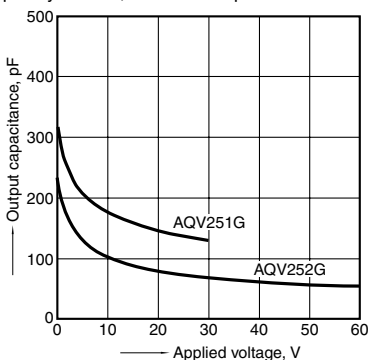

13. Max. switching frequency

Tested sample: AQV251G; LED current: 5 mA; Ambient temperature: 25°C 77°F

