

# International IOR Rectifier

## MBRB20...CTG MBR20...CTG-1

SCHOTTKY RECTIFIER

20 Amp

$I_{F(AV)} = 20 \text{ Amp}$   
 $V_R = 80/100V$

### Major Ratings and Characteristics





Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	20	A
$I_{FRM}$ @ $T_C = 133^\circ\text{C}$ (PerLeg)	20	A
$V_{RRM}$	80/ 100	V
$I_{FSM}$ @ tp = 5 $\mu\text{s}$ sine	850	A
$V_F$ @ 10Apk, $T_J = 125^\circ\text{C}$	0.70	V
$T_J$ range	-65 to 150	$^\circ\text{C}$

### Description/ Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to  $150^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $150^\circ\text{C}$   $T_J$  operation
- Center tap D<sup>2</sup>Pak and TO-262 packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

### Case Styles

<p>MBRB20...CTG</p>  <p>Base Common Cathode 2</p>  <p>1 Anode    2 Common Cathode    3 Anode</p> <p>D<sup>2</sup>PAK</p>	<p>MBR20...CTG-1</p>  <p>Base Common Cathode 2</p>  <p>1 Anode    2 Common Cathode    3 Anode</p> <p>TO-262</p>
--	---

Voltage Ratings

Parameters	MBRB2080CTG MBR2080CTG-1	MBRB2090CTG MBR2090CTG-1	MBRB20100CTG MBR20100CTG-1
V <sub>R</sub> Max. DC Reverse Voltage (V)	80	90	100
V <sub>RWM</sub> Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
I <sub>F(AV)</sub> Max. Average Forward Current (Per Leg) (Per Device)	10	A	@ T <sub>C</sub> = 133° C, (Rated V <sub>R</sub> )
	20		
I <sub>FRM</sub> Peak Repetitive Forward Current (Per Leg)	20	A	Rated V <sub>R</sub> , square wave, 20kHz T <sub>C</sub> = 133° C
I <sub>FSM</sub> Non Repetitive Peak Surge Current	850	A	5µs Sine or 3µs Rect. pulse Following any rated load condition and with rated V <sub>RRM</sub> applied Surge applied at rated load conditions halfwave, single phase, 60Hz
	150		
I <sub>RRM</sub> Peak Repetitive Reverse Surge Current	0.5	A	2.0 µsec 1.0KHz
E <sub>AS</sub> Non-Repetitive Avalanche Energy (Per Leg)	24	mJ	T <sub>J</sub> = 25° C, I <sub>AS</sub> = 2 Amps, L = 12 mH

Electrical Specifications

Parameters	Values	Units	Conditions
V <sub>FM</sub> Max. Forward Voltage Drop (1)	0.80	V	@ 10A
	0.95	V	@ 20A
	0.70	V	@ 10A
	0.85	V	@ 20A
I <sub>RM</sub> Max. Instantaneous Reverse Current (1)	0.10	mA	T <sub>J</sub> = 25° C
	6	mA	T <sub>J</sub> = 125° C
V <sub>F(TO)</sub> Threshold Voltage	0.433	V	T <sub>J</sub> = T <sub>J</sub> max.
r <sub>t</sub> Forward Slope Resistance	15.8	mΩ	
C <sub>T</sub> Max. Junction Capacitance	400	pF	V <sub>R</sub> = 5V <sub>DC</sub> (test signal range 100Khz to 1Mhz) 25° C
L <sub>S</sub> Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change	10000	V/ µs	(Rated V <sub>R</sub> )

(1) Pulse Width < 300µs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T <sub>J</sub> Max. Junction Temperature Range	-65 to 150	°C	
T <sub>stg</sub> Max. Storage Temperature Range	-65 to 175	°C	
R <sub>thJC</sub> Max. Thermal Resistance Junction to Case (Per Leg)	2.0	°C/W	DC operation
R <sub>thCS</sub> Typical Thermal Resistance Case to Heatsink	0.50	°C/W	Mounting surface, smooth and greased Only for TO-220
R <sub>thJA</sub> Max. Thermal Resistance Junction to Ambient	50	°C/W	DC operation For D2Pak and TO-262
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min.	6 (5)	Non-lubricated threads
	Max.	12 (10)	
MarkingDevice	MBRB20100CTG	Casestyle D <sup>2</sup> -Pak	
	MBR20100CTG-1	Casestyle TO-262	

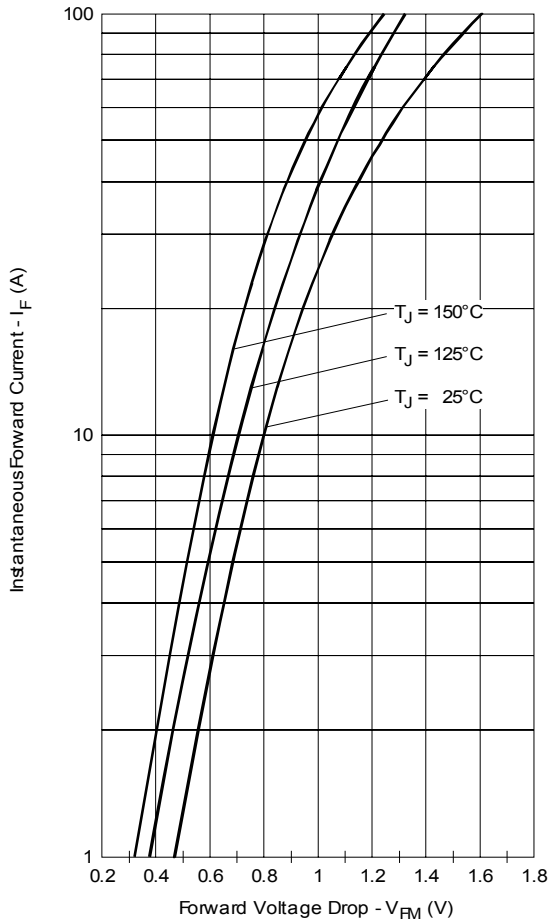


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

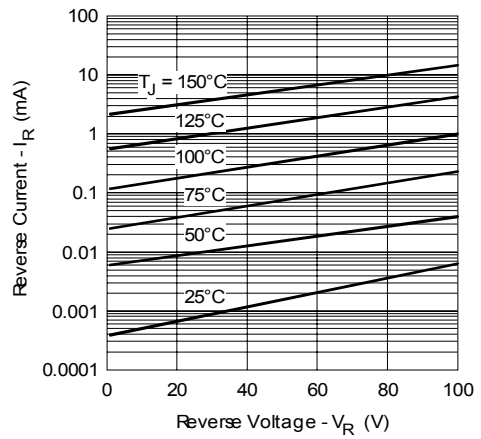


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

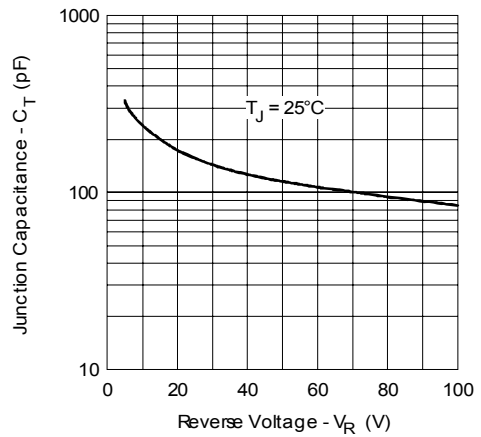


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

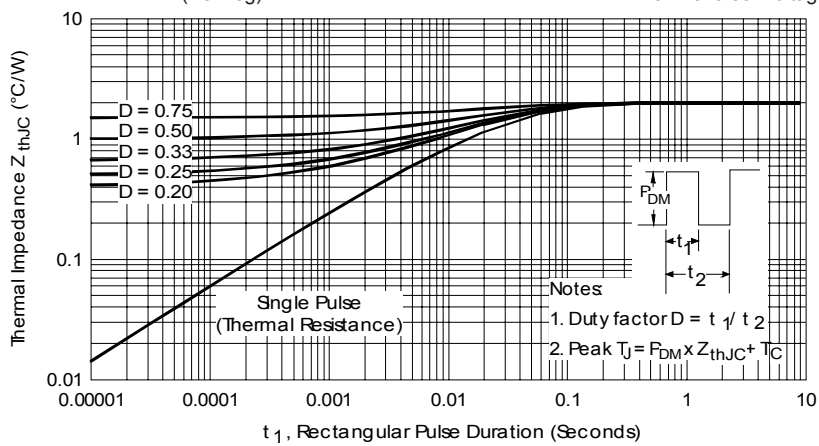


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

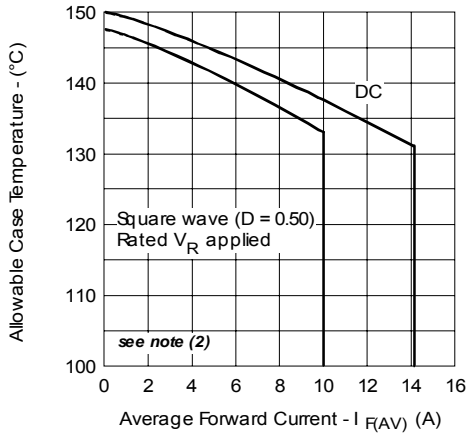


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

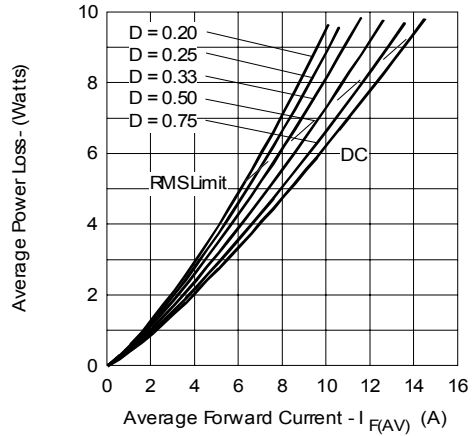


Fig. 6 - Forward Power Loss Characteristics (Per Leg)



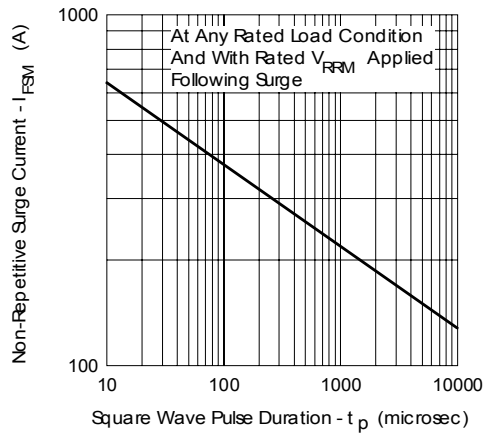



Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

- (2) Formula used:  $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$  ;  
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);  
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = \text{rated } V_R$


Outline Table

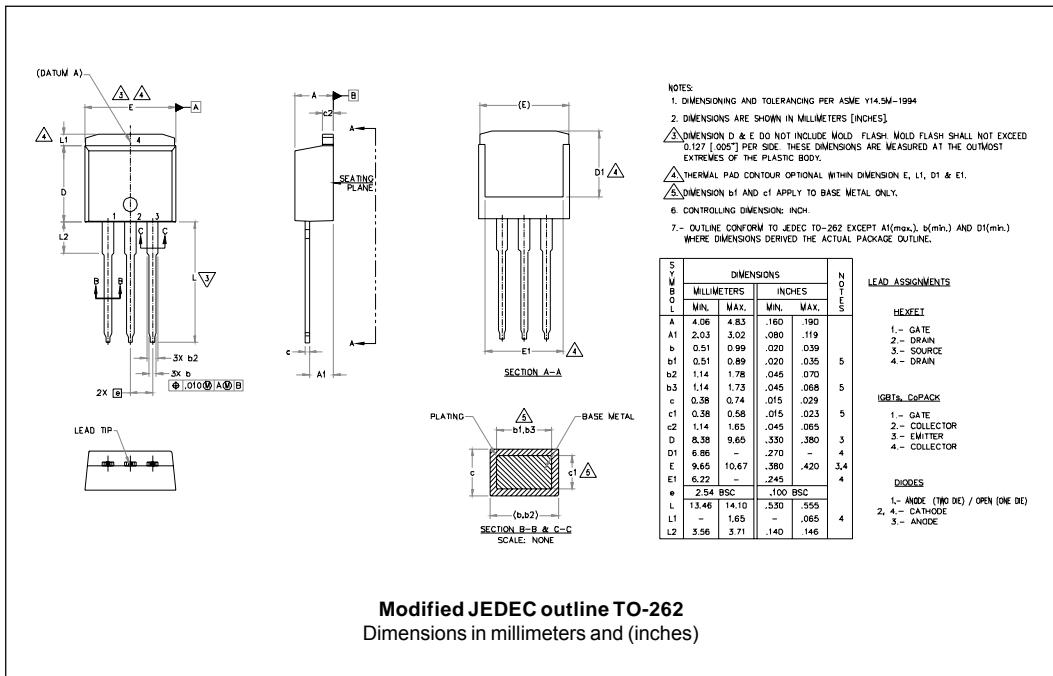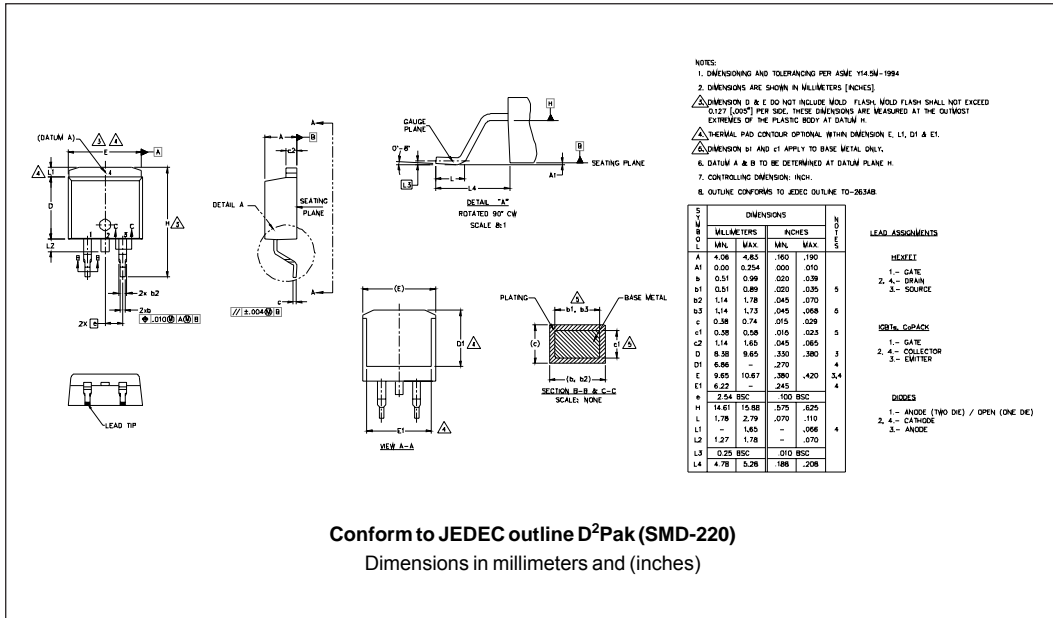

**Tape & Reel Information**

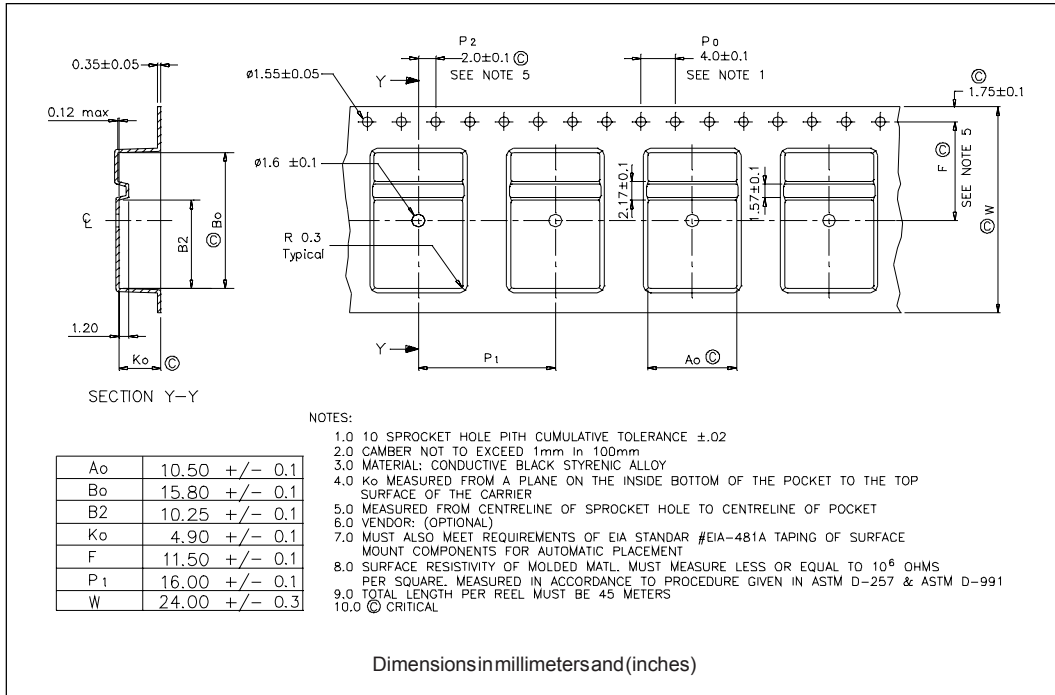

**Part Marking Information**

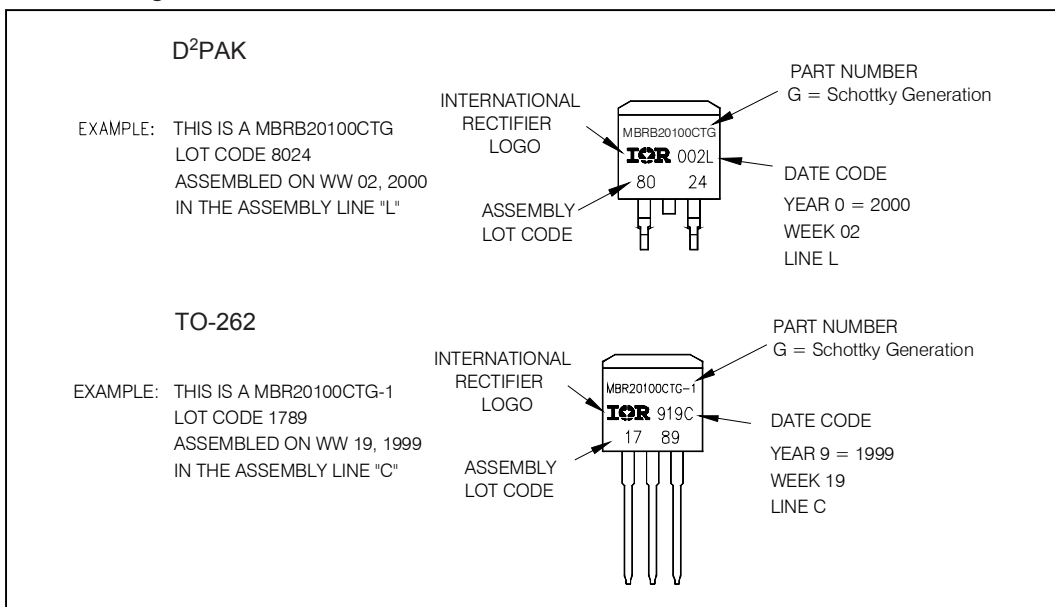

Ordering Information Table

Device Code																			
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">MBR</td> <td style="padding: 5px;">B</td> <td style="padding: 5px;">20</td> <td style="padding: 5px;">100</td> <td style="padding: 5px;">CT</td> <td style="padding: 5px;">G</td> <td style="padding: 5px;">-1</td> <td style="padding: 5px;">TRL</td> <td style="padding: 5px;">-</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> <td style="text-align: center;">⑧</td> <td style="text-align: center;">⑨</td> </tr> </table>	MBR	B	20	100	CT	G	-1	TRL	-	①	②	③	④	⑤	⑥	⑦	⑧	⑨
MBR	B	20	100	CT	G	-1	TRL	-											
①	②	③	④	⑤	⑥	⑦	⑧	⑨											
<b>1</b>	- Essential Part Number																		
<b>2</b>	- <ul style="list-style-type: none"> <li>• B = D<sup>2</sup>Pak</li> <li>• none = TO-262</li> </ul>																		
<b>3</b>	- Current Rating (20 = 20A)																		
<b>4</b>	- Voltage Ratings																		
<b>5</b>	- CT = Essential Part Number																		
<b>6</b>	- G = Schottky Generation																		
<b>7</b>	- <ul style="list-style-type: none"> <li>• none = D<sup>2</sup>Pak</li> <li>• -1 = TO-262</li> </ul>																		
<b>8</b>	- <ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TRL = Tape &amp; Reel (Left Oriented - for D<sup>2</sup>Pak only)</li> <li>• TRR = Tape &amp; Reel (Right Oriented - for D<sup>2</sup>Pak only)</li> </ul>																		
<b>9</b>	- <ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free (D<sup>2</sup>Pak tube)</li> <li>• P = Lead-Free (for D<sup>2</sup>Pak TRR and TRL, and TO-262)</li> </ul>																		

80 = 80V
90 = 90V
100 = 100V

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.