

**LM124, LM124A, LM224, LM224A
LM324, LM324A, LM324Y, LM2902, LM2902Q
QUADRUPLE OPERATIONAL AMPLIFIERS**

SLOS066B - SEPTEMBER 1975 - REVISED MARCH 1994

- Wide Range of Supply Voltages:
Single Supply . . . 3 V to 30 V
(LM2902 and LM2902Q
3 V to 26 V), or Dual Supplies
- Low Supply Current Drain Independent of Supply Voltage . . . 0.8 mA Typ
- Common-Mode Input Voltage Range Includes Ground Allowing Direct Sensing Near Ground
- Low Input Bias and Offset Parameters:
Input Offset Voltage . . . 3 mV Typ
A Versions . . . 2 mV Typ
Input Offset Current . . . 2 nA Typ
Input Bias Current . . . 20 nA Typ
A Versions . . . 15 nA Typ
- Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage . . . 32 V (26 V for LM2902 and LM2902Q)
- Open-Loop Differential Voltage Amplification . . . 100 V/mV Typ
- Internal Frequency Compensation

description


These devices consist of four independent high-gain frequency-compensated operational amplifiers that are designed specifically to operate from a single supply over a wide range of voltages. Operation from split supplies is also possible when the difference between the two supplies is 3 V to 30 V (for the LM2902 and LM2902Q, 3 V to 26 V) and V_{CC} is at least 1.5 V more positive than the input common-mode voltage. The low supply current drain is independent of the magnitude of the supply voltage.

Applications include transducer amplifiers, dc amplification blocks, and all the conventional operational amplifier circuits that now can be more easily implemented in single-supply-voltage systems. For example, the LM124 can be operated directly from the standard 5-V supply that is used in digital systems and easily provides the required interface electronics without requiring additional ± 15 -V supplies.


The LM2902Q is manufactured to demanding automotive requirements.

The LM124 and LM124A are characterized for operation over the full military temperature range of -55°C to 125°C . The LM224 and LM224A are characterized for operation from -25°C to 85°C . The LM324 and LM324A are characterized for operation from 0°C to 70°C . The LM2902 and LM2902Q are characterized for operation from -40°C to 105°C .

**LM124, LM224A . . . J OR W PACKAGE
ALL OTHERS . . . D, DB, J, N OR PW PACKAGE
(TOP VIEW)**




**LM124, LM124A . . . FK PACKAGE
(TOP VIEW)**

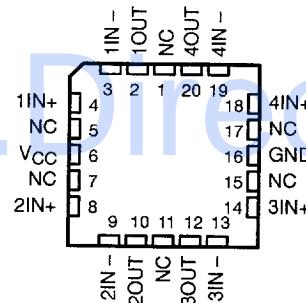

NC - No internal connection

symbol (each amplifier)

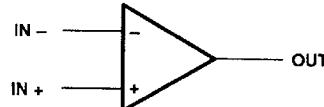

PRODUCTION DATA Information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1994, Texas Instruments Incorporated



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

■ 8961724 0092716 478 ■

2-17

**LM124, LM124A, LM224, LM224A
LM324, LM324A, LM324Y, LM2902, LM2902Q
QUADRUPLE OPERATIONAL AMPLIFIERS**

SLOS066B - SEPTEMBER 1975 - REVISED MARCH 1994


AVAILABLE OPTIONS

TA	V_{IOmax} AT 25°C	PACKAGED DEVICES						CHIP FORM (Y)	
		SMALL OUTLINE (D)†	VERY SMALL OUTLINE (DB)‡	CHIP CARRIER (FK)	CERAMIC DIP (J)	PLASTIC DIP (N)	TSSOP (PW)‡		
0°C to 70°C	7 mV 3 mV	LM324D LM324AD	LM324DBLE	—	—	LM324N LM324AN	LM324PWLE LM324APWLE	—	LM324Y
25°C to 85°C	5 mV 3 mV	LM224D LM224AD	—	—	—	LM224N LM224AN	—	—	—
-40°C to 105°C	7 mV	LM2902D LM2902QD	LM2902DBLE	—	—	LM2902N LM2902QN	LM2902PWLE	—	—
-55°C to 125°C	5 mV 2 mV	—	—	LM124FK LM124AFK	LM124J LM124AJ	—	—	LM124W	—

† The D package is available taped and reeled. Add the suffix R to the device type (e.g., LM324DR).

‡ The DB and PW packages are only available left-end taped and reeled.

schematic (each amplifier)

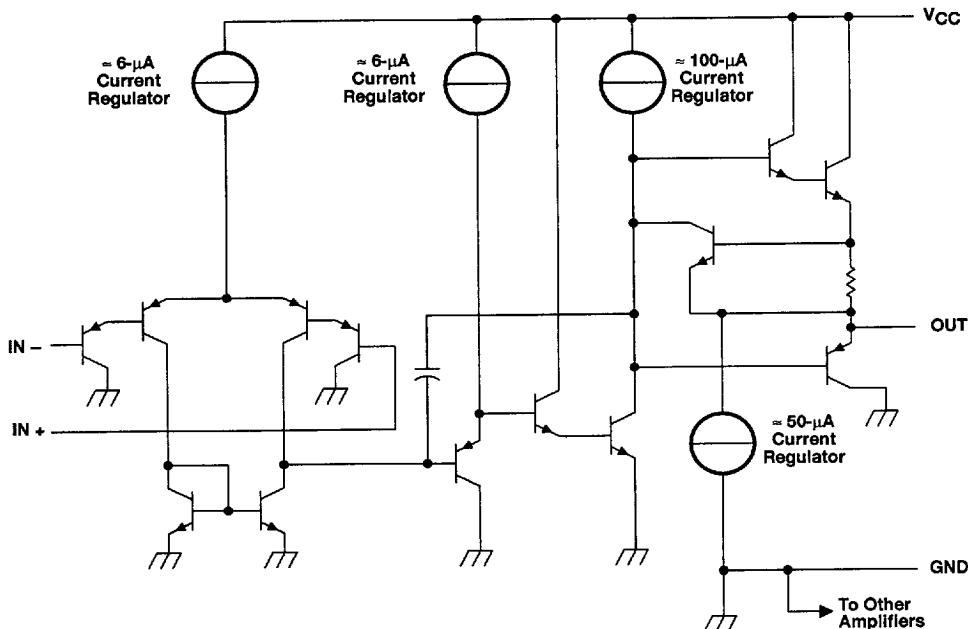

COMPONENT COUNT (total device)	
Epi-FET	1
Transistors	95
Diodes	4
Resistors	11
Capacitors	4

8961724 0092717 304

**TEXAS
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**LM124, LM124A, LM224, LM224A
LM324, LM324A, LM324Y, LM2902, LM2902Q
QUADRUPLE OPERATIONAL AMPLIFIERS**

SLOS066B - SEPTEMBER 1975 - REVISED MARCH 1994

LM324Y chip information

This chip, when properly assembled, displays characteristics similar to the LM324. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

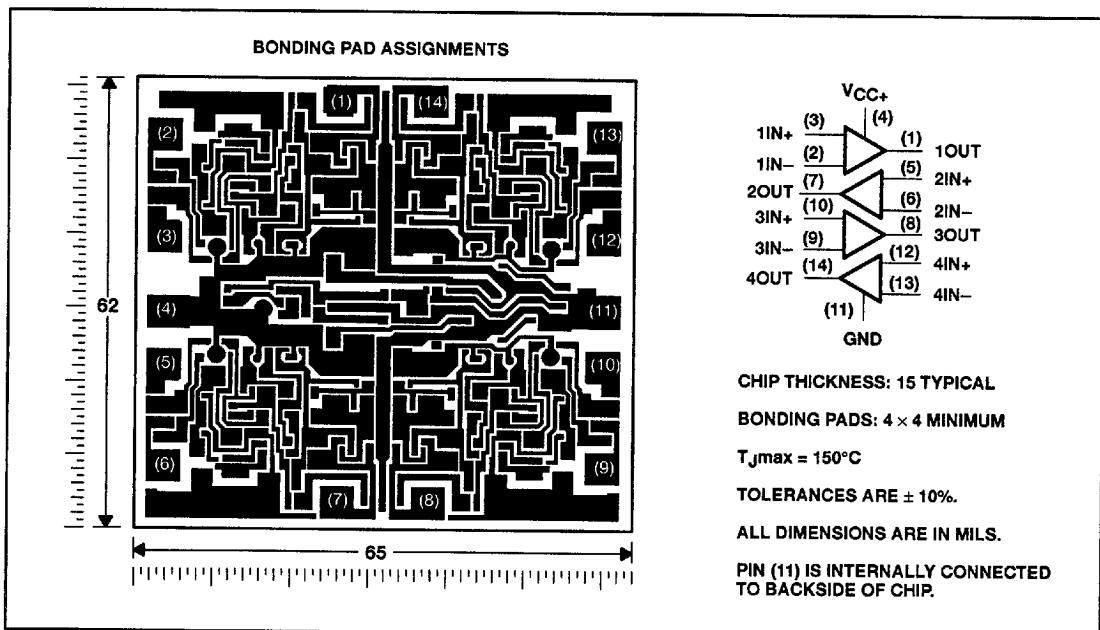

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

■ 8961724 0092718 240 ■

2-19

**LM124, LM124A, LM224, LM224A
LM324, LM324A, LM324Y, LM2902, LM2902Q
QUADRUPLE OPERATIONAL AMPLIFIERS**

SI LOS066B - SEPTEMBER 1975 - REVISED MARCH 1994

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

	LM124, LM124A LM224, LM224A LM324, LM324A	LM2902, LM2902Q	UNIT
Supply voltage, V _{CC} (see Note 1)	32	26	V
Differential input voltage, V _{ID} (see Note 2)	±32	±26	V
Input voltage, V _I (either input)	-0.3 to 32	-0.3 to 26	V
Duration of output short circuit (one amplifier) to ground at (or below) T _A = 25°C, V _{CC} ≤ 15 V (see Note 3)	unlimited	unlimited	
Continuous total dissipation	See Dissipation Rating Table		
Operating free-air temperature range, T _A	LM124, LM124A	-55 to 125	°C
	LM224, LM224A	-25 to 85	
	LM324, LM324A	0 to 70	
	LM2902, LM2902Q	-40 to 105	
Storage temperature range	-65 to 150	-65 to 150	°C
Case temperature for 60 seconds	FK package	260	°C
Lead temperature 1.6 mm (1/16 inch) from case for 60 seconds	J or W package	300	°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	D, DB, N, or PW package	260	°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values (except differential voltages and V_{CC}) specified for the measurement of I_{DS} are with respect to the network GND.
2. Differential voltages are at $IN+$ with respect to $IN-$.

DISCOURSES ON THE RATING TABLE

DISSIPATION RATING TABLE						
PACKAGE	TA ≤ 25°C POWER RATING	DERATING FACTOR	DERATE ABOVE TA	TA = 70°C POWER RATING	TA = 85°C POWER RATING	TA = 125°C POWER RATING
D	900 mW	7.6 mW/°C	32°C	608 mW	494 mW	N/A
DB	775 mW	6.2 mW/°C	25°C	496 mW	403 mW	N/A
FK	900 mW	11.0 mW/°C	68°C	880 mW	715 mW	275 mW
J (LM124_)	900 mW	11.0 mW/°C	68°C	880 mW	715 mW	275 mW
J (all others)	900 mW	8.2 mW/°C	40°C	656 mW	533 mW	N/A
N	900 mW	9.2 mW/°C	52°C	736 mW	598 mW	N/A
PW	700 mW	5.6 mW/°C	25°C	448 mW	364 mW	N/A
W	900 mW	8.0 mW/°C	37°C	640 mW	520 mW	200 mW

8961724 0092719 187



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

LM124, LM124A, LM224, LM224A
 LM324, LM324A, LM324Y, LM2902, LM2902Q
 QUADRUPLE OPERATIONAL AMPLIFIERS

SLOS066B - SEPTEMBER 1975 - REVISED MARCH 1994

electrical characteristics at specified free-air temperature, $V_{CC} = 5\text{ V}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	LM124, LM224			LM324			LM2902, LM2902Q			UNIT	
		T _A ‡	MIN	TYP §	MAX	MIN	TYP §	MAX	MIN	TYP §	MAX	
V_{IO} Input offset voltage	$V_{CC} = 5\text{ V}$ to MAX, $V_{IC} = V_{ICR\min}$, $V_O = 1.4\text{ V}$	25°C	3	5		3	7		3	7		mV
	Full range				7			9			10	
I_{IO} Input offset current	$V_O = 1.4\text{ V}$	25°C	2	30		2	50		2	50		mA
	Full range				100			150			200	
I_B Input bias current	$V_O = 1.4\text{ V}$	25°C	-20	-150		-20	-250		-20	-250		mA
	Full range				-300			-500			-500	
V_{ICR} Common-mode input voltage range	$V_{CC} = 5\text{ V}$ to MAX	25°C	0 to $V_{CC}-1.5$		0 to $V_{CC}-1.5$	0 to $V_{CC}-1.5$		0 to $V_{CC}-1.5$	0 to $V_{CC}-1.5$		0 to $V_{CC}-1.5$	V
	Full range		$V_{CC}-2$		$V_{CC}-2$	$V_{CC}-2$		$V_{CC}-2$	$V_{CC}-2$		$V_{CC}-2$	
V_{OH} High-level output voltage	$R_L = 2\text{ k}\Omega$	25°C	$V_{CC}-1.5$			$V_{CC}-1.5$			$V_{CC}-1.5$			V
	$R_L = 10\text{ k}\Omega$	25°C										
V_{OL} Low-level output voltage	$V_{CC} = \text{MAX}$, $R_L = 2\text{ k}\Omega$	Full range	26			26			26		22	
	$V_{CC} = \text{MAX}$, $R_L \geq 10\text{ k}\Omega$	Full range	27	28		27	28		28	29	23	24
A_{VD} Large-signal differential voltage amplification	$R_L \leq 10\text{ k}\Omega$	Full range	5	20		5	20		5	20	5	100
	$V_{CC} = 15\text{ V}$, $V_O = 1\text{ V}$ to 11 V , $R_L \geq 2\text{ k}\Omega$	Full range	50	100		25	100		25	100	100	V/mV
$CMRR$ Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$	25°C	70	80		65	80		50	80	50	dB
	Supply voltage rejection ratio ($\Delta V_{CC}/\Delta V_O$)	25°C	66	100		65	100		50	100	50	dB
V_{O1}/V_{O2} Crosstalk attenuation	$f = 1\text{ kHz}$ to 20 kHz	25°C	120			120			120		120	dB
	$V_{ID} = 1\text{ V}$, $V_O = 0$	Full range	-20	-30	-60	-20	-30	-60	-20	-30	-30	dB
I_O Output current	$V_{CC} = 15\text{ V}$, $V_O = 15\text{ V}$	25°C	10	20		10	20		10	20	10	mA
	$V_{ID} = -1\text{ V}$, $V_O = 200\text{ mV}$	Full range	5			5			5		5	
I_{OS} Short-circuit output current	$V_{CC} \text{ at } 5\text{ V}$, $V_O = 0$	25°C	12	30		12	30		12	30	30	µA
	GND at -5 V	Full range	±40	±60		±40	±60		±40	±60	±40	mA
I_{CC} Supply current (four amplifiers)	$V_O = 2.5\text{ V}$, No load	Full range	0.7	1.2		0.7	1.2		0.7	1.2	0.7	mA
	$V_{CC} = \text{MAX}$, $V_O = 0.5\text{ V}_{CC}$, No load	Full range	1.4	3		1.4	3		1.4	3	1.4	mA

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. MAX V_{CC} for testing purposes is 26 V for LM2902 and LM2902Q, 30 V for the others.

‡ Full range is -55°C to 125°C for LM124, -25°C to 85°C for LM224, 0°C to 70°C for LM324, and -40°C to 105°C for LM2902 and LM2902Q.

§ All typical values are at $T_A = 25^\circ\text{C}$.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**LM124, LM124A, LM224, LM224A
LM324, LM324A, LM324Y, LM2902, LM2902Q
QUADRUPLE OPERATIONAL AMPLIFIERS**

SLOS066B - SEPTEMBER 1975 - REVISED MARCH 1994

electrical characteristics at specified free-air temperature, $V_{CC} = 5\text{ V}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS [†]	LM124A				LM224A				LM324A				
		T _A [‡]	MIN	TYP ^{\$}	MAX	MIN	TYP ^{\$}	MAX	MIN	TYP ^{\$}	MAX	MIN	TYP ^{\$}	MAX
V_{IO} Input offset voltage	$V_{CC} = 5\text{ V}$ to 30 V , $V_{IC} = V_{ICRmin}$, $V_O = 1.4\text{ V}$	25°C Full range		2		2	3		2	3		2	3	mV
I_O Input offset current	$V_O = 1.4\text{ V}$	25°C Full range		10		2	15		2	30		76	nA	
I_B Input bias current	$V_O = 1.4\text{ V}$	25°C Full range		30		-50	-80		-15	-80		-100	nA	
V_{ICR} Common-mode input voltage range	$V_{CC} = 30\text{ V}$	25°C Full range	0 to 0 to $V_{CC}-2$	$V_{CC}-1.5$		0 to 0 to $V_{CC}-2$	$V_{CC}-1.5$		0 to 0 to $V_{CC}-2$	$V_{CC}-1.5$		0 to $V_{CC}-1.5$		UNIT
V_{OH} High-level output voltage	$R_L = 2\text{ k}\Omega$ $V_{CC} = 30\text{ V}$, $R_L = 2\text{ k}\Omega$ $V_{CC} = 30\text{ V}$, $R_L \geq 10\text{ k}\Omega$	25°C Full range Full range	26		26	27		26	27	27	28	28	V	
V_{OL} Low-level output voltage	$R_L \leq 10\text{ k}\Omega$ Large-signal differential voltage amplification	25°C Full range	27		27	28		27	28	27	28	28	V	
A_{VD} CMRR	$V_{CC} = 15\text{ V}$, $V_O = 1\text{ V}$ to 11 V , $R_L \geq 2\text{ k}\Omega$ $V_{IC} = V_{ICRmin}$	25°C Full range	20		5	20		5	20	5	20	5	mV	
k_{SVR} ($\Delta V_{CC}/\Delta V_{IO}$)		25°C Full range	25		25	25		15	15	15	15	15	15	mV
V_{O1}/V_{O2} Crosstalk attenuation	$f = 1\text{ kHz}$ to 20 kHz	25°C Full range	120		120	120		120	120	120	120	120	120	dB
I_O Output current	$V_{CC} = 15\text{ V}$, $V_O = 0$ $V_{CC} = 15\text{ V}$, $V_O = 15\text{ V}$ $V_{ID} = -1\text{ V}$, $V_O = -1\text{ V}$, $V_O = 200\text{ mV}$	25°C Full range 25°C Full range 25°C Full range	-20		-20	-20		-30	-60	-20	-30	-60	-60	mA
I_{OS} Short-circuit output current	$V_{CC} = 5\text{ V}$, $V_O = 0$ $V_O = 2.5\text{ V}$, $V_O = 30\text{ V}$, No load	25°C Full range	12		12	12		30	12	30	12	30	30	µA
I_{CC} Supply current (four amplifiers)		25°C Full range	±40		±60	±40		±60	±40	±60	±40	±60	±60	mA
	No lead	0.7		1.2		0.7		1.2	0.7	1.2	0.7	1.2	1.2	mA
	No lead	1.4		3		1.4		3	1.4	3	1.4	3	3	mA

[†] All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified.

[‡] Full range is -55°C to 125°C for LM124A, -25°C to 85°C for LM224A, and 0°C to 70°C for LM324A.

^{\$} All typical values are at $T_A = 25^\circ\text{C}$.

■ 8961724 0092721 835

 **TEXAS
INSTRUMENTS**
POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**LM124, LM124A, LM224, LM224A
LM324, LM324A, LM324Y, LM2902, LM2902Q
QUADRUPLE OPERATIONAL AMPLIFIERS**

SLOS066B - SEPTEMBER 1976 - REVISED MARCH 1994

electrical characteristics, $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS ^T	LM324Y			UNIT
		MIN	TYP	MAX	
V_{IO}	Input offset voltage		3	7	mV
I_{IO}	Input offset current	V _{CC} = 5 V to MAX, V _{IC} = V _{ICRmin} , V _O = 1.4 V	2	50	nA
I_{IB}	Input bias current		-20	-250	nA
V_{ICR}	Common-mode input voltage range	V _{CC} = 5 V to MAX	0 to V _{CC} -1.5		V
V_{OH}	High-level output voltage	R _L = 10 k Ω	V _{CC} -1.5		V
V_{OL}	Low-level output voltage	R _L \leq 10 k Ω	5	20	mV
AvD	Large-signal differential voltage amplification	V _{CC} = 15 V, V _O = 1 V to 11 V, R _L \geq 2 k Ω	15	100	V/mV
CMRR	Common-mode rejection ratio	V _{IC} = V _{ICRmin}	65	80	dB
k _{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)		65	100	dB
I_O	Output current	V _{CC} = 15 V, V _{ID} = 1 V, V _O = 0	-20	-30	-60
		V _{CC} = 15 V, V _{ID} = -1 V, V _O = 15 V	10	20	mA
		V _{ID} = 1 V, V _O = 200 mV	12	30	
I _{OS}	Short-circuit output current	V _{CC} at 5 V, GND at -5 V, V _O = 0	± 40	± 60	mA
I _{CC}	Supply current (four amplifiers)	V _O = 2.5 V _{CC} , No load	0.7	1.2	mA
		V _{CC} = MAX, V _O = 0.5 V _{CC} , No load	1.1	3	

^T All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. MAX V_{CC} for testing purposes is 30 V.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-23

■ 8961724 0092722 771 ■