



## JAN Qualified N-Channel 60-V (D-S) MOSFETs

PRODUCT SUMMARY			
$V_{(BR)DSS}$ Min (V)	$r_{DS(on)}$ Max ( $\Omega$ )	$V_{GS(th)}$ (V)	$I_D$ (A)
60	3 @ $V_{GS} = 10$ V	0.8 to 2	0.99

### FEATURES

- Military Qualified
- Low On-Resistance: 1.3  $\Omega$
- Low Threshold: 1.7 V
- Low Input Capacitance: 35 pF
- Fast Switching Speed: 8 ns
- Low Input and Output Leakage


### BENEFITS

- Guaranteed Reliability
- Low Offset Voltage
- Low-Voltage Operation
- Easily Driven Without Buffer
- High-Speed Circuits
- Low Error Voltage

### APPLICATIONS

- Military Applications
- Direct Logic-Level Interface: TTL/CMOS
- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories, Transistors, etc.
- Battery Operated Systems
- Solid-State Relays

Datasheet.Directory

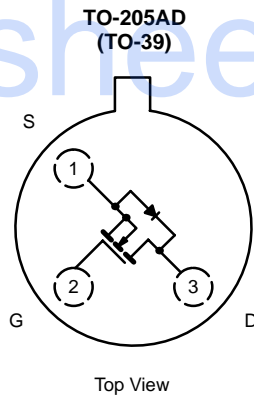

Device Marking  
Side View

JAN2N6660\*  
"S" flxxyy

"S" = Siliconix Logo  
f = Factory Code  
// = Lot Traceability  
xyyy = Date Code

\*Note: or JANTX2N6660  
JANTXV2N6660

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)			
Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	60	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	
Continuous Drain Current ( $T_J = 150^\circ\text{C}$ )	$I_D$	$T_C = 25^\circ\text{C}$	A
		$T_C = 100^\circ\text{C}$	
Pulsed Drain Current <sup>a</sup>	$I_{DM}$	3	
Power Dissipation	$P_D$	$T_C = 25^\circ\text{C}$	W
		$T_A = 25^\circ\text{C}$	
Thermal Resistance, Junction-to-Ambient <sup>b</sup>	$R_{thJA}$	170	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{thJC}$	20	
Operating Junction and Storage Temperature Range	$T_J, T_{stg}$	-55 to 150	$^\circ\text{C}$

Notes

- a. Pulse width limited by maximum junction temperature.  
b. Not required by Military Spec.



SPECIFICATIONS <sup>a</sup>							
Parameter	Symbol	Test Conditions	Limits			Unit	
			Min	Typ <sup>b</sup>	Max		
<b>Static</b>							
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = 10\ \mu\text{A}$	60	75		V	
Gate-Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 1\text{ mA}$		0.8	1.7		2
			$T_C = -55^\circ\text{C}$				2.5
			$T_C = 125^\circ\text{C}$	0.3			
Gate-Body Leakage	$I_{GSS}$	$V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$				$\pm 100$	nA
			$T_C = 125^\circ\text{C}$			$\pm 500$	
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 48\text{ V}, V_{GS} = 0\text{ V}$				1	$\mu\text{A}$
			$T_C = 125^\circ\text{C}$			100	
On-State Drain Current <sup>c</sup>	$I_{D(on)}$	$V_{DS} = 10\text{ V}, V_{GS} = 10\text{ V}$		2		A	
Drain-Source On-Resistance <sup>c</sup>	$r_{DS(on)}$	$V_{GS} = 5\text{ V}, I_D = 0.3\text{ A}$		2	5	$\Omega$	
			$V_{GS} = 10\text{ V}, I_D = 1\text{ A}$		1.3		3
			$T_C = 125^\circ\text{C}$		2.4		5.6
Forward Transconductance <sup>c</sup>	$g_{fs}$	$V_{DS} = 7.5\text{ V}, I_D = 0.525\text{ A}$	170	350		mS	
Diode Forward Voltage	$V_{SD}$	$I_S = 0.99\text{ A}, V_{GS} = 0\text{ V}$	0.7	0.8	1.6	V	
<b>Dynamic</b>							
Input Capacitance	$C_{iss}$	$V_{DS} = 25\text{ V}, V_{GS} = 0\text{ V}$ $f = 1\text{ MHz}$		35	50	pF	
Output Capacitance	$C_{oss}$			25	40		
Reverse Transfer Capacitance	$C_{rss}$			7	10		
Drain-Source Capacitance	$C_{ds}$			30			
<b>Switching<sup>d</sup></b>							
Turn-On Time	$t_{ON}$	$V_{DD} = 25\text{ V}, R_L = 23\ \Omega$ $I_D \cong 1\text{ A}, V_{GEN} = 10\text{ V}$ $R_G = 25\ \Omega$		8	10	ns	
Turn-Off Time	$t_{OFF}$			8.5	10		

Notes

- a.  $T_A = 25^\circ\text{C}$  unless otherwise noted.
- b. For DESIGN AID ONLY, not subject to production testing.
- c. Pulse test:  $PW \leq 300\ \mu\text{s}$  duty cycle  $\leq 2\%$ .
- d. Switching time is essentially independent of operating temperature.
- e. For typical characteristics curves see the 2N6659/2N6660, VQ1004J/P data sheet.

VNDQ06



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.