
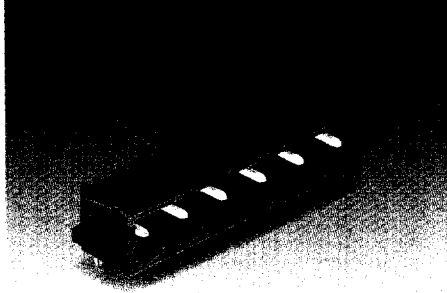


# 5 Headers with Solder Pins, Pin Spacing 7.62 mm / 0.3 in, orange

<b>Pin spacing 7.62 mm / 0.3 in, orange</b> <b>Straight solder pin</b> 400 V/6 kV/3   300 V, 10 A ① ② 12 A ①/16 A ②   300 V, 15 A ② ③ 300 V, 15 A ③ <b>Mating direction perpendicular to PCB</b> * ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ BV NV ⑬ ⑭	<b>Pin spacing 7.62 mm / 0.3 in, orange</b> <b>Right angle solder pin</b> 400 V/6 kV/3   300 V, 10 A ① ② 12 A ①/16 A ②   300 V, 15 A ② ③ 300 V, 15 A ③ <b>Mating direction parallel to PCB</b> * ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ BV NV ⑬ ⑭
--	--

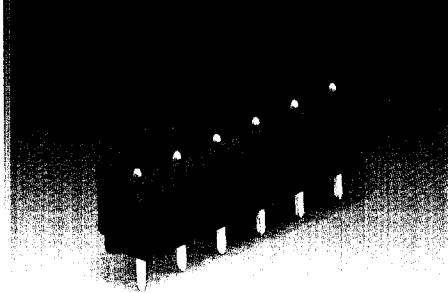


No. of poles	Item-No.	Item-No.	No. of poles	Item-No.	Item-No.
<b>Closed end headers, orange, straight solder pin</b> 1 x 1 mm ①     1.2 x 1.2 mm ②			<b>Closed end headers, orange, right angle solder pin</b> 1 x 1 mm ①     1.2 x 1.2 mm ②		
2	231-732/001-000	231-762/001-000	2	231-932/001-000	231-962/001-000
3	231-733/001-000	231-763/001-000	3	231-933/001-000	231-963/001-000
4	231-734/001-000	231-764/001-000	4	231-934/001-000	231-964/001-000
5	231-735/001-000	231-765/001-000	5	231-935/001-000	231-965/001-000
6	231-736/001-000	231-766/001-000	6	231-936/001-000	231-966/001-000
7	231-737/001-000	231-767/001-000	7	231-937/001-000	231-967/001-000
8	231-738/001-000	231-768/001-000	8	231-938/001-000	231-968/001-000
9	231-739/001-000	231-769/001-000	9	231-939/001-000	231-969/001-000
10	231-740/001-000	231-770/001-000	10	231-940/001-000	231-970/001-000
11	231-741/001-000	231-771/001-000	11	231-941/001-000	231-971/001-000
12	231-742/001-000	231-772/001-000	12	231-942/001-000	231-972/001-000

**Accessories** (please refer to remarks concerning coding on page 5.75)

	<b>Coding key, snap-on type,</b> light grey <b>231-130</b>		<b>Coding key, snap-on type,</b> light grey <b>231-130</b>
	<b>Separator, for formation of</b> groups, light grey <b>231-500</b>		<b>Separator, for formation of</b> groups, light grey <b>231-500</b>
			<b>Fixing element, horizontal,</b> orange <b>231-393</b>
			<b>Screw M 2 x 12 with nut</b> <b>231-195</b> for fixing element
			<b>Tapping Screw,</b> B 2.2 x 13 <b>231-194</b> fixing hole Ø 1.8 mm

**Dimensions (in mm)**     Diameter of drilled hole: 1.4<sup>+0.1</sup> mm (solder pin 1 x 1 mm); 1.7<sup>+0.1</sup> mm (solder pin 1.2 x 1.2 mm)

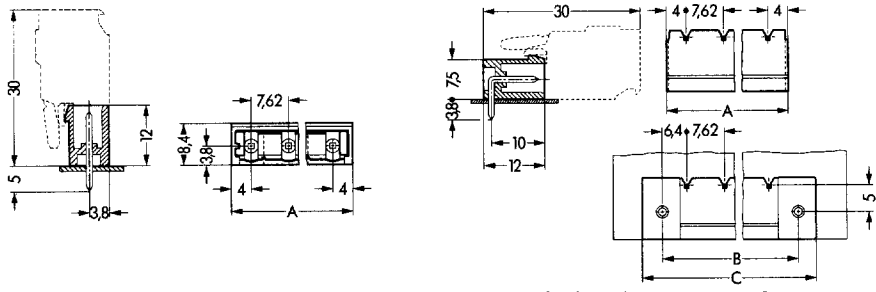

**Note:** These connectors can only be mated and unmated at voltages below 42 V and in the “No load” condition.  
For mating and unmating at low power values, please request data.

\* For international approvals (with corresponding ratings) see pages 10.3 - 10.38.