



Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

1N5221
THRU
1N5267

500 mW
Zener Diode
2.4 to 75 Volts

DO-35


Features

- Wide Voltage Range Available
Glass Package
High Temp Soldering: 260°C for 10 Seconds At Terminals
Marking : Cathode band and type number
Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
Moisture Sensitivity: Level 1

Maximum Ratings


- Operating Temperature: -55°C to +150°C
Storage Temperature: -55°C to +150°C
500 mWatt DC Power Dissipation
Power Derating: 4.0mW/°C above 50°C
Forward Voltage @ 200mA: 1.1 Volts

Figure 1 - Typical Capacitance

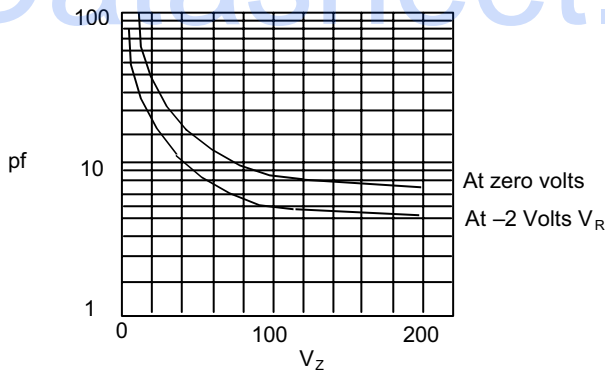

Typical Capacitance (pf) - versus - Zener voltage (Vz)

Figure 2 - Derating Curve

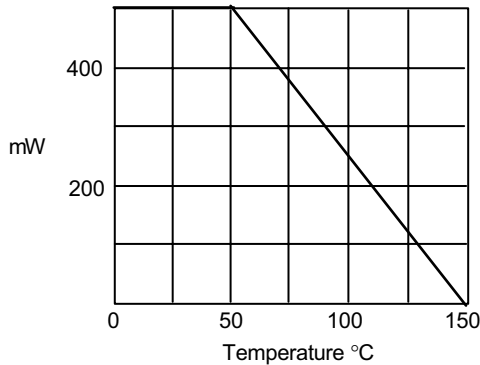

Power Dissipation (mW) - Versus - Temperature °C

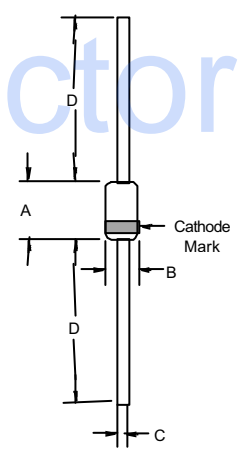


Table with 6 columns: DIM, INCHES (MIN, MAX), MM (MIN, MAX), and NOTE. Rows include dimensions A, B, C, and D.

Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.

1N5221 thru 1N5267

ELECTRICAL CHARACTERISTICS @25°C

| MCC PART NUMBER | NOMINAL ZENER VOLTAGE V_Z @ I_{ZT} VOLTS | TEST CURRENT I_{ZT} mA | MAXIMUM ZENER IMPEDANCE 'B' SUFFIX ONLY | | MAXIMUM REVERSE LEAKAGE CURRENT I_R @ V_R | | MAX. ZENER VOLTAGE TEMP COEFFICIENT 'B' SUFFIX ONLY %/°C |
|-----------------|---|-----------------------------|--|-------------------------------|--|-------|---|
| | | | Z_{ZT} @ I_{ZT} | Z_{ZK} @ $I_{ZK} = 0.25$ mA | μ A | VOLTS | |
| | | | OHMS | OHMS | | | |
| 1N5221 | 2.4 | 20 | 30 | 1200 | 100 | 1.0 | -0.085 |
| 1N5222 | 2.5 | 20 | 30 | 1250 | 100 | 1.0 | -0.085 |
| 1N5223 | 2.7 | 20 | 30 | 1300 | 75 | 1.0 | -0.080 |
| 1N5224 | 2.8 | 20 | 30 | 1400 | 75 | 1.0 | -0.080 |
| 1N5225 | 3.0 | 20 | 29 | 1600 | 50 | 1.0 | -0.075 |
| 1N5226 | 3.3 | 20 | 28 | 1600 | 25 | 1.0 | -0.070 |
| 1N5227 | 3.6 | 20 | 24 | 1700 | 15 | 1.0 | -0.065 |
| 1N5228 | 3.9 | 20 | 23 | 1900 | 10 | 1.0 | -0.060 |
| 1N5229 | 4.3 | 20 | 22 | 2000 | 5.0 | 1.0 | ± 0.055 |
| 1N5230 | 4.7 | 20 | 19 | 1900 | 5.0 | 2.0 | ± 0.030 |
| 1N5231 | 5.1 | 20 | 17 | 1600 | 5.0 | 2.0 | ± 0.030 |
| 1N5232 | 5.6 | 20 | 11 | 1600 | 5.0 | 3.0 | +0.038 |
| 1N5233 | 6.0 | 20 | 7.0 | 1600 | 5.0 | 3.5 | +0.038 |
| 1N5234 | 6.2 | 20 | 7.0 | 1000 | 5.0 | 4.0 | +0.045 |
| 1N5235 | 6.8 | 20 | 5.0 | 750 | 3.0 | 5.0 | +0.050 |
| 1N5236 | 7.5 | 20 | 6.0 | 500 | 3.0 | 6.0 | +0.058 |
| 1N5237 | 8.2 | 20 | 8.0 | 500 | 3.0 | 6.5 | +0.062 |
| 1N5238 | 8.7 | 20 | 8.0 | 600 | 3.0 | 6.5 | +0.065 |
| 1N5239 | 9.1 | 20 | 10 | 600 | 3.0 | 7.0 | +0.068 |
| 1N5240 | 10 | 20 | 17 | 600 | 3.0 | 8.0 | +0.075 |
| 1N5241 | 11 | 20 | 22 | 600 | 2.0 | 8.4 | +0.076 |
| 1N5242 | 12 | 20 | 30 | 600 | 1.0 | 9.1 | +0.077 |
| 1N5243 | 13 | 9.5 | 13 | 600 | 0.5 | 9.9 | +0.079 |
| 1N5244 | 14 | 9.0 | 15 | 600 | 0.1 | 10 | +0.082 |
| 1N5245 | 15 | 8.5 | 16 | 600 | 0.1 | 11 | +0.082 |
| 1N5246 | 16 | 7.8 | 17 | 600 | 0.1 | 12 | +0.083 |
| 1N5247 | 17 | 7.4 | 19 | 600 | 0.1 | 13 | +0.084 |
| 1N5248 | 18 | 7.0 | 21 | 600 | 0.1 | 14 | +0.085 |
| 1N5249 | 19 | 6.6 | 23 | 600 | 0.1 | 14 | +0.086 |
| 1N5250 | 20 | 6.2 | 25 | 600 | 0.1 | 15 | +0.086 |
| 1N5251 | 22 | 5.6 | 29 | 600 | 0.1 | 17 | +0.087 |
| 1N5252 | 24 | 5.2 | 33 | 600 | 0.1 | 18 | +0.088 |
| 1N5253 | 25 | 5.0 | 35 | 600 | 0.1 | 19 | +0.089 |
| 1N5254 | 27 | 4.6 | 41 | 600 | 0.1 | 21 | +0.090 |
| 1N5255 | 28 | 4.5 | 44 | 600 | 0.1 | 21 | +0.091 |
| 1N5256 | 30 | 4.2 | 49 | 600 | 0.1 | 23 | +0.091 |
| 1N5257 | 33 | 3.8 | 58 | 700 | 0.1 | 25 | +0.092 |
| 1N5258 | 36 | 3.4 | 70 | 700 | 0.1 | 27 | +0.093 |
| 1N5259 | 39 | 3.2 | 80 | 800 | 0.1 | 30 | +0.094 |
| 1N5260 | 43 | 3.0 | 93 | 900 | 0.1 | 33 | +0.095 |
| 1N5261 | 47 | 2.7 | 105 | 1000 | 0.1 | 36 | +0.095 |
| 1N5262 | 51 | 2.5 | 125 | 1100 | 0.1 | 39 | +0.096 |
| 1N5263 | 56 | 2.2 | 150 | 1300 | 0.1 | 43 | +0.096 |
| 1N5264 | 60 | 2.1 | 170 | 1400 | 0.1 | 46 | +0.097 |
| 1N5265 | 62 | 2.0 | 185 | 1400 | 0.1 | 47 | +0.097 |
| 1N5266 | 68 | 1.8 | 230 | 1600 | 0.1 | 52 | +0.097 |
| 1N5267 | 75 | 1.7 | 270 | 1700 | 0.1 | 56 | +0.098 |

NOTE 1: Table as shown lists type numbers, which indicate a tolerance of $\pm 20\%$ with guaranteed limits on only V_Z , I_R , and V_F . Devices with guaranteed limits on all six parameters are indicated by suffix "A" for $\pm 10\%$, "B" for $\pm 5\%$, "C" for $\pm 2\%$ tolerance

NOTE 2: The electrical characteristics are measured after allowing the device to stabilize for 20 seconds.

NOTE 3: Temperature coefficient (ΔV_Z). Test conditions for temperature coefficient are as follows:

- $I_{ZT} = 7.5$ mA, $T_1 = 25^\circ\text{C}$, $T_2 = 125^\circ\text{C}$ (1N5221 thru 1N5242)
- $I_{ZT} = \text{Rated } I_{ZT}$, $T_1 = 25^\circ\text{C}$, $T_2 = 125^\circ\text{C}$ (1N5243 thru 1N5267)

Device to be temperature stabilized with current applied prior to reading breakdown voltage at the specified ambient temperature.

1N5221 thru 1N5267

Figure 1
Zener Voltage versus Zener Current – $V_z = 1$ thru 16 Volts


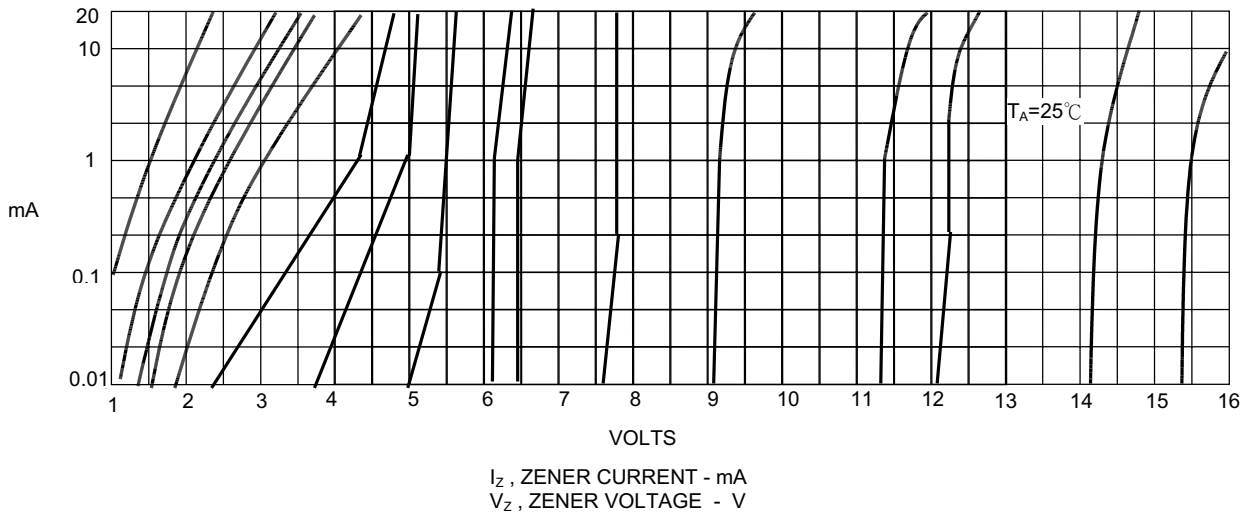


Figure 2
Zener Voltage versus Zener Current – $V_z = 15$ thru 30 Volts

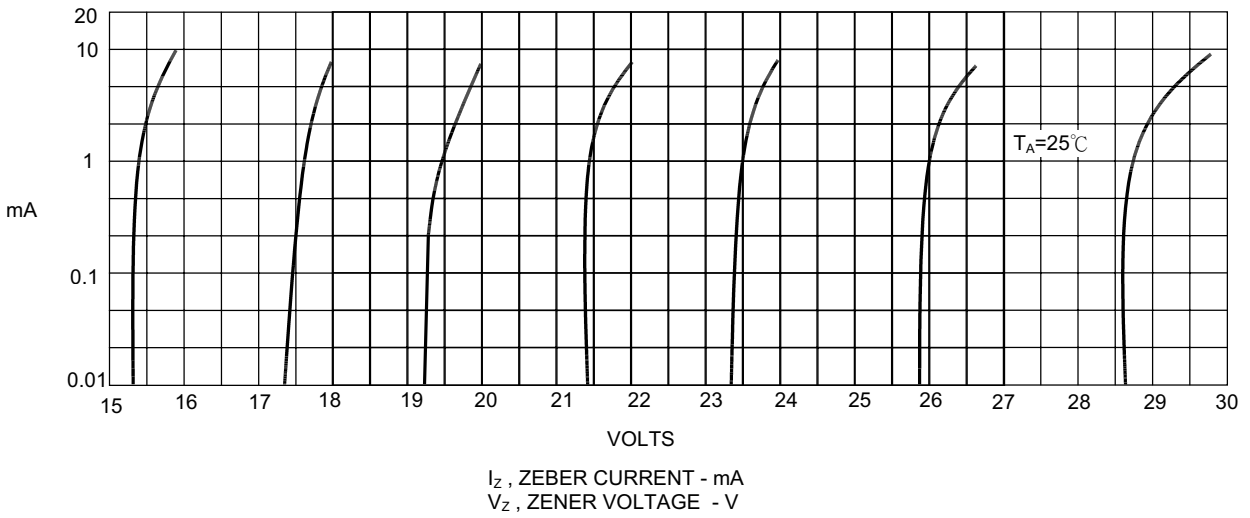

1N5221 thru 1N5267

Figure 3
Zener Voltage versus Zener Current – $V_z = 30$ thru 75 Volts


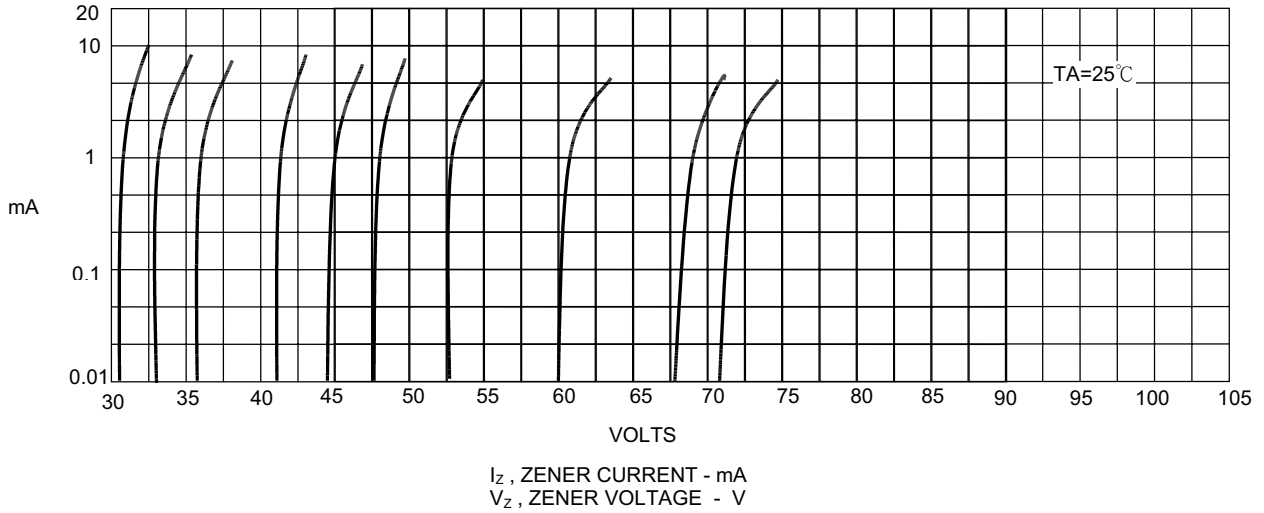


Figure 4
Thermal resistance from junction to ambient as a function of pulse duration



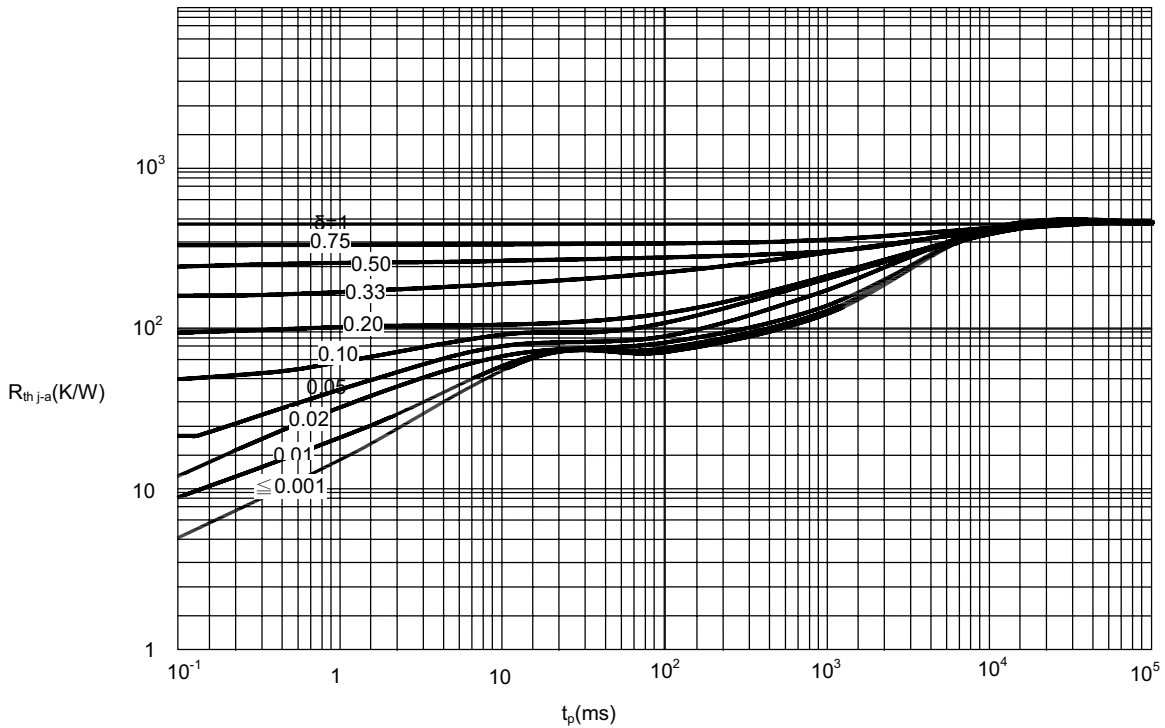

Micro Commercial Components

Ordering Information :

| Device | Packing |
|----------------|------------------------------|
| Part Number-TP | Tape&Reel: 10Kpcs/Reel |
| Part Number-AP | Ammo Packing: 5Kpcs/Ammo Box |
| Part Number-BP | Bulk: 100Kpcs/Carton |

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.