

Sub-Miniature Cone Lock Indicator Lamp




Single Chip LED

Push Fit - metal body

IP67 - Ø5.0

Features

- Low profile
- Self sealing indicator sealed to IP67
- For high density applications
- Fast, easy push fit mounting
- Optional black anodised body
- Coloured lens
- 80° Viewing angle
- Operating Temp -40 to 85°
- Storage Temp -40 to 85°

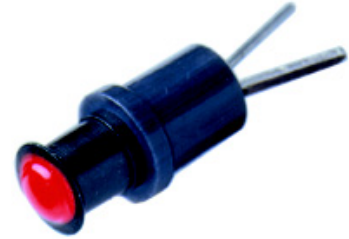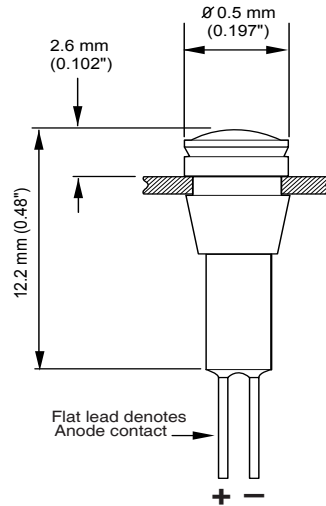

Mounting Hole SSI/5

Ordering Information and Technical Characteristics

Ordering Information	Colour	Forward Voltage (V)	Current (ma)	Luminous Intensity (mcd)	Reverse Voltage (V)
SSI/5/RD	Red	2.1	20	1	5
SSI/5/AR	Amber	2.1	20	1.5	5
SSI/5/GN	Green	2.1	20	1.5	5
SSI/5/AlGaAsRD	Red	2.1	20	1200	5
SSI/5/H/AR	Amber	2.1	20	1000	5
SSI/5/H/GN	Green	3.6	20	1250	5
SSI/5/REF1/RD	Red	2.1	20	1	5
SSI/5/REF1/AR	Amber	2.1	20	1.5	5
SSI/5/REF1/GN	Green	2.1	20	1.5	5
SSI/5/REF1/AlGaAsRD	Red	2.1	20	1200	5
SSI/5/REF1/H/AR	Amber	2.1	20	1000	5
SSI/5/REF1/H/GN	Green	3.6	20	1250	5

Mean time before failure 90,000 hrs

1) For optional black anodised body include BB within the type number. e.g. SSI/BB/5/-

2) REF1 denotes tag terminals