



# ALUMINUM ELECTROLYTIC CAPACITORS

**VZ** series Wide Temperature Range



Anti-Solvent Feature (Through 100V only)


- Small case sizes as same as VR series, but operating over wide temperature range of  $-55$  to  $+105^{\circ}\text{C}$ .
- Compliant to the RoHS directive (2002/95/EC).

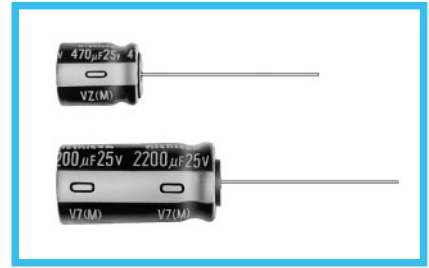

## Specifications

Item	Performance Characteristics																																							
Category Temperature Range	$-55$ to $+105^{\circ}\text{C}$ (6.3 to 100V), $-40$ to $+105^{\circ}\text{C}$ (160 to 400V), $-25$ to $+105^{\circ}\text{C}$ (450V)																																							
Rated Voltage Range	6.3 to 450V																																							
Rated Capacitance Range	0.1 to 33000 $\mu\text{F}$																																							
Capacitance Tolerance	$\pm 20\%$ at 120Hz, $20^{\circ}\text{C}$																																							
Leakage Current	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3 to 100</th> <th>160 to 450</th> </tr> </thead> <tbody> <tr> <td>_____</td> <td>After 1 minute's application of rated voltage, leakage current is not more than <math>0.03\text{CV}</math> or <math>4</math> (<math>\mu\text{A}</math>), whichever is greater. After 2 minutes' application of rated voltage, leakage current is not more than <math>0.01\text{CV}</math> or <math>3</math> (<math>\mu\text{A}</math>), whichever is greater.</td> <td>After 1 minute's application of rated voltage, <math>\text{CV} \leq 1000</math>: <math>I = 0.1\text{CV} + 40</math> (<math>\mu\text{A}</math>) or less After 1 minute's application of rated voltage, <math>\text{CV} &gt; 1000</math>: <math>I = 0.04\text{CV} + 100</math> (<math>\mu\text{A}</math>) or less</td> </tr> </tbody> </table>	Rated voltage (V)	6.3 to 100	160 to 450	_____	After 1 minute's application of rated voltage, leakage current is not more than $0.03\text{CV}$ or $4$ ( $\mu\text{A}$ ), whichever is greater. After 2 minutes' application of rated voltage, leakage current is not more than $0.01\text{CV}$ or $3$ ( $\mu\text{A}$ ), whichever is greater.	After 1 minute's application of rated voltage, $\text{CV} \leq 1000$ : $I = 0.1\text{CV} + 40$ ( $\mu\text{A}$ ) or less After 1 minute's application of rated voltage, $\text{CV} > 1000$ : $I = 0.04\text{CV} + 100$ ( $\mu\text{A}$ ) or less																																	
	Rated voltage (V)	6.3 to 100	160 to 450																																					
_____	After 1 minute's application of rated voltage, leakage current is not more than $0.03\text{CV}$ or $4$ ( $\mu\text{A}$ ), whichever is greater. After 2 minutes' application of rated voltage, leakage current is not more than $0.01\text{CV}$ or $3$ ( $\mu\text{A}$ ), whichever is greater.	After 1 minute's application of rated voltage, $\text{CV} \leq 1000$ : $I = 0.1\text{CV} + 40$ ( $\mu\text{A}$ ) or less After 1 minute's application of rated voltage, $\text{CV} > 1000$ : $I = 0.04\text{CV} + 100$ ( $\mu\text{A}$ ) or less																																						
Tangent of loss angle ( $\tan \delta$ )	For capacitance of more than $1000\mu\text{F}$ , add 0.02 for every increase of $1000\mu\text{F}$ . Measurement frequency : 120Hz, Temperature : $20^{\circ}\text{C}$																																							
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160 to 200</th> <th>250 to 350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td><math>\tan \delta</math> (MAX.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.20</td> <td>0.25</td> <td></td> <td></td> </tr> </tbody> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 200	250 to 350	400	450	$\tan \delta$ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.25															
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 200	250 to 350	400	450																											
$\tan \delta$ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.25																														
Endurance	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160 to 200</th> <th>250 to 350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio <math>Z_{-25^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}</math></td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>4</td> <td>6</td> <td>15</td> </tr> <tr> <td><math>Z_{-40^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}</math></td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>8</td> <td>10</td> <td>—</td> </tr> </tbody> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 200	250 to 350	400	450	Impedance ratio $Z_{-25^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	5	4	3	2	2	2	2	2	3	4	6	15	$Z_{-40^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	10	8	6	4	3	3	3	3	4	8	10	—
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 200	250 to 350	400	450																											
Impedance ratio $Z_{-25^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	5	4	3	2	2	2	2	2	3	4	6	15																												
$Z_{-40^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	10	8	6	4	3	3	3	3	4	8	10	—																												
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to $20^{\circ}\text{C}$ after the rated voltage is applied for 1000 hours at $105^{\circ}\text{C}$ .																																							
	<table border="1"> <tbody> <tr> <td>Capacitance change</td> <td>Within <math>\pm 20\%</math> of the initial capacitance value</td> </tr> <tr> <td><math>\tan \delta</math></td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>	Capacitance change	Within $\pm 20\%$ of the initial capacitance value	$\tan \delta$	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																																	
Capacitance change	Within $\pm 20\%$ of the initial capacitance value																																							
$\tan \delta$	200% or less than the initial specified value																																							
Leakage current	Less than or equal to the initial specified value																																							
Marking	Printed with white color letter on black sleeve.																																							

## Radial Lead Type

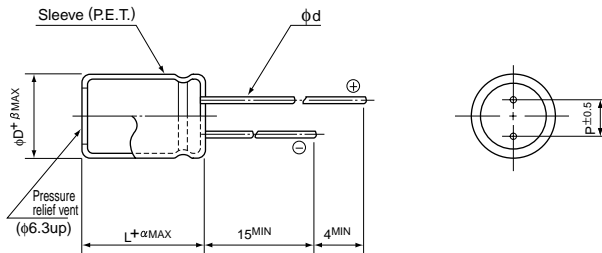


	$\phi D$	5	6.3	8	10	12.5	16	18	20	22	25
P		2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	12.5
$\phi d$		0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.0
$\beta$		0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0

$\alpha$	( $L < 20$ ) 1.5
	( $L \geq 20$ ) 2.0

- Please refer to page 20 about the end seal configuration.

## Type numbering system (Example : 10V 330 $\mu\text{F}$ )

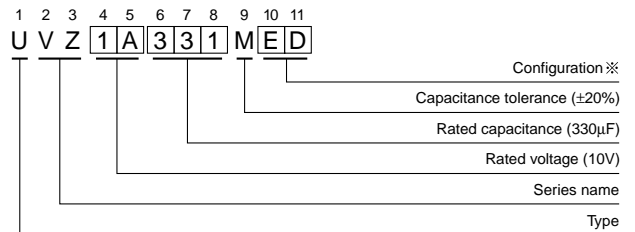

※ Configuration

$\phi D$	Pb-free leadwire Pb-free PET sleeve
5	DD
6.3	ED
8 - 10	PD
12.5 to 18	HD
20 to 25	RD

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

