

LT-Series Toggle Switches



The LT-Series illuminated toggle switches feature a three-color lighting sequence from a single lamp. These lighted toggles contain neoprene bushing seals for dust and moisture protection and provide a simple way to dress-up most any Marine or Transportation industry panel. A variety of circuits and terminations are available.

Dielectric Strength

1000V-live to dead metal parts

Electrical Life


50,000 cycles- maintained
25,000 cycles- momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

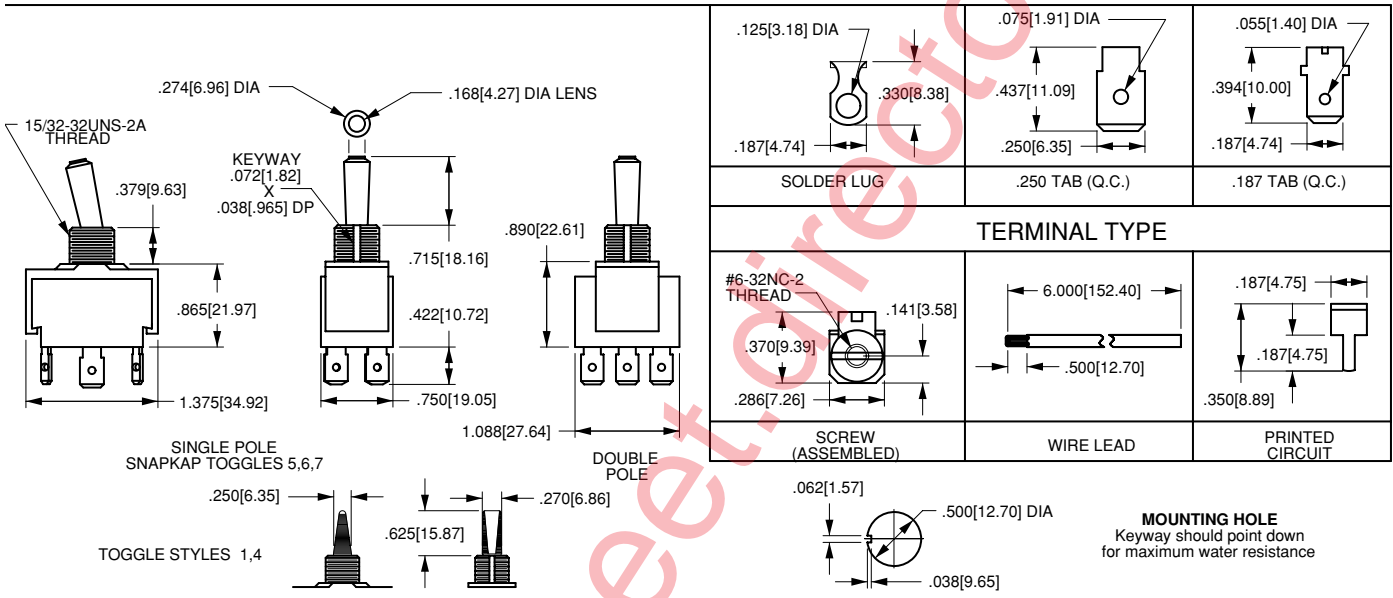

LT-1561 - 1 30 - 012

1 Base Part Number 2 Actuator Style 3 Lighting Sequence 4 Lamp Voltage

1 BASE PART NUMBER: SERIES/POLES/ILLUMINATION/CIRCUITRY ³ /RATING/TERMINATION ⁵				3 LIGHTING SEQUENCE ^{3,4}		
10A 250VAC, 15A 125VAC, 3/4 HP 125-250VAC, 15A 15-28VDC				position 1	position 2	position 3
Single Pole in Double Pole base				01	red	red
solder lug	.250 tab	screw term.	wire leads	02	amber	amber
LT-1510	LT-1511	LT-1514	LT-1515	03	green	green
LT-1520	LT-1521	LT-1524	LT-1525	10	red	none
LT-1530	LT-1531	LT-1534	LT-1535	11	red	clear
LT-1540	LT-1541	LT-1544	LT-1545	12	red	clear
LT-1550	LT-1551	LT-1554	LT-1555	13	red	clear
LT-1560	LT-1561	LT-1564	LT-1565	14	red	clear
LT-1570	LT-1571	LT-1574	LT-1575	15	red	clear
LT-1580	LT-1581	LT-1584	LT-1585	20	amber	none
				21	amber	clear
				22	amber	clear
				23	amber	clear
				24	amber	clear
				25	amber	clear
				30	green	none
				31	green	clear
				32	green	clear
				33	green	clear
				34	green	clear
				35	green	clear
				40	blue	none
				41	blue	clear
				42	blue	clear
				43	blue	clear
				44	blue	clear
				45	blue	clear
				50	clear	none
				51	clear	clear
				52	clear	clear
				53	clear	clear
				54	clear	clear
				55	clear	clear

2 ACTUATOR STYLE		snapkap style ²	
paddle¹		5	bright chrome
1	clear paddle	6	satin chrome
4	solid color paddle	7	black molded

4 LAMP VOLTAGE ⁶		incandescent	
neon		006	6 volts
125	125 volts neon	012	12 volts
250	250 volts	018	18 volts
		024	24 volts

NOTES
 1 Solid color paddle available with lighting sequence 01, 02, 10 or 20.
 2 SnapKap Toggle Lenses are available separately. Consult factory.
 3 Independent lamp is standard. Dependent lamp with ON-OFF function (including momentary) is available with Lighting Sequences 10, 20, 30, 40 and 50. (No light in OFF position.)
 4 Green and blue not recommended with 125 volt or 250 volt neon lamps.
 5 Additional terminations available. Consult factory for details.
 () Indicates momentary function.