



**Small Signal Diode**



**SOD-323F**

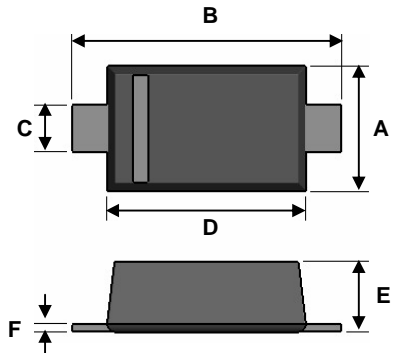

**Features**

- ↪ Fast switching device ( $T_{rr} < 4.0nS$ )
- ↪ Surface device type mounting
- ↪ Moisture sensitivity level 1
- ↪ Matte Tin (Sn) lead finish with Nickel (Ni) underplate
- ↪ Pb free version and RoHS compliant
- ↪ Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code

**Mechanical Data**

- ↪ Case : Flat lead SOD-323F small outline plastic package
- ↪ Terminal: Matte tin plated, solderable per MIL-STD-202, Method 208 guaranteed
- ↪ High temperature soldering guaranteed: 260°C/10s
- ↪ Polarity : Indicated by cathode band
- ↪ Weight : 4.85±0.5 mg
- ↪ Marking Code : S1, S2, S3

Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.15	1.35	0.045	0.053
B	2.30	2.70	0.091	0.106
C	0.25	0.40	0.010	0.016
D	1.60	1.80	0.063	0.071
E	0.80	1.00	0.031	0.039
F	0.05	0.20	0.002	0.008


**Ordering Information**

Package	Part No.	Packing	Marking
SOD-323F	1N4148WS RR	3K / 7" Reel	S1
SOD-323F	1N4448WS RR	3K / 7" Reel	S2
SOD-323F	1N914BWS RR	3K / 7" Reel	S3
SOD-323F	1N4148WS RRG	3K / 7" Reel	S1
SOD-323F	1N4448WS RRG	3K / 7" Reel	S2
SOD-323F	1N914BWS RRG	3K / 7" Reel	S3

**Pin Configuration**



**Suggested PAD Layout**

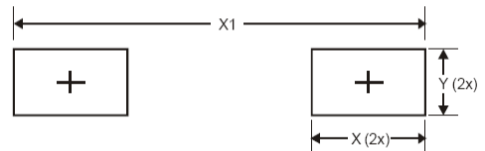

Dimensions	Value (in mm)
X	0.710
X1	2.900
Y	0.403

**Maximum Ratings and Electrical Characteristics**

Rating at 25°C ambient temperature unless otherwise specified.

**Maximum Ratings**

Type Number	Symbol	Value	Units
Power Dissipation	$P_D$	200	mW
Repetitive Peak Reverse Voltage	$V_{RRM}$	100	V
Reverse Voltage	$V_R$	100	V
Non-Repetitive Peak Forward Current	$I_{FRM}$	300	mA
Mean Forward Current	$I_o$	150	mA
Thermal Resistance (Junction to Ambient)	$R_{\theta JA}$	500	°C/W
Junction and Storage Temperature Range	$T_J, T_{STG}$	-65 to +150	°C


Notes: 1. The suggested land pattern dimensions have been provided for reference only, as actual pad layouts may vary depending on application.

### Small Signal Diode




### Electrical Characteristics

Type Number		Symbol	Min	Max	Units
Reverse Breakdown Voltage	$I_R = 100\mu A$	$V_{(BR)}$	100	-	V
	$I_R = 5\mu A$		75	-	
Forward Voltage	1N4448WS, 1N914BWS	$V_F$	0.62	0.72	V
	1N4148WS		-	1.0	
	1N4448WS, 1N914BWS		-	1.0	
Reverse Leakage Current	$V_R = 20V$	$I_R$	-	25	nA
	$V_R = 75V$		-	5.0	$\mu A$
Junction Capacitance	$V_R = 0, f = 1.0MHz$	$C_J$	-	4.0	pF
Reverse Recovery Time	$I_F = 10mA, I_R = 60mA, R_L = 100\Omega, I_{RR} = 1mA$	$T_{rr}$	-	4.0	ns

### Tape & Reel specification

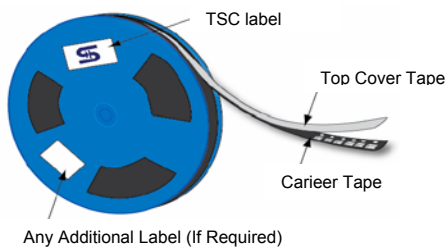

Item	Symbol	Dimension(mm)
Carrier depth	K	2.40 Max.
Sprocket hole	D	$1.5 \pm 0.1$
Reel outside diameter	A	$178 \pm 1$
Reel inner diameter	D1	50 Min.
Feed hole width	D2	$13.0 \pm 0.5$
Sprocket hole position	E	$1.75 \pm 0.10$
Punch hole position	F	$3.50 \pm 0.05$
Sprocket hole pitch	P0	$4.00 \pm 0.10$
Embossment center	P1	$2.00 \pm 0.10$
Overall tape thickness	T	0.6 Max.
Tape width	W	8.30 Max.
Reel width	W1	14.4 Max

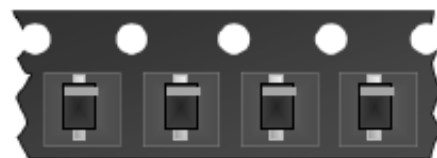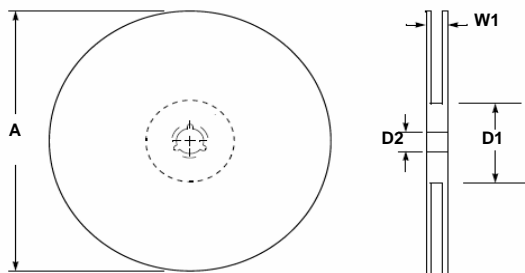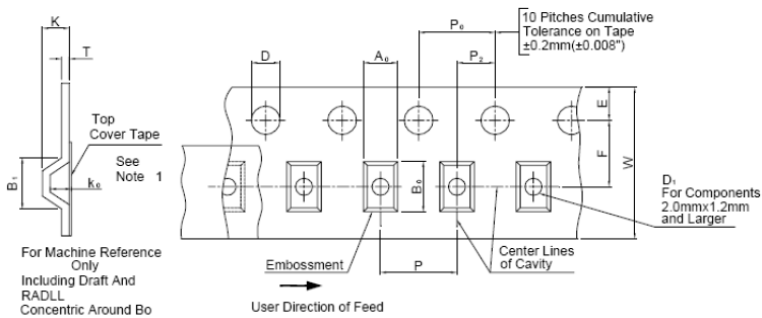

→ User Direction of Feed


Note 1: A0, B0, and K0 are determined by component size. The clearance between the components and the cavity must be within 0.05 mm min. to 0.5 mm max. The component cannot rotate more than 10° within the determined cavity.

Note 2: If B1 exceeds 4.2 mm(0.165") for 8 mm embossed tape, the tape may not feed through all tape feeders.


**Small Signal Diode**

**Rating and Characteristic Curves**


**FIG 1 Forward Voltage vs Forward Current**

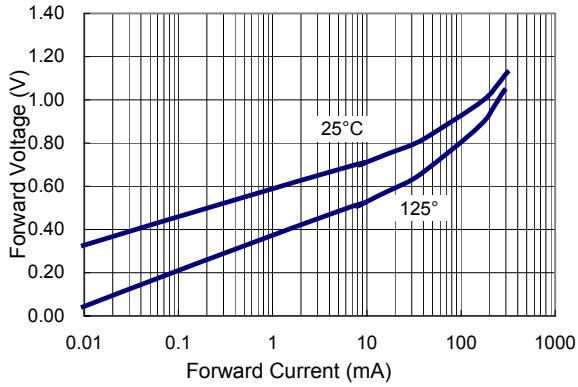

**FIG 2 Reverse Current vs Reverse Voltage**

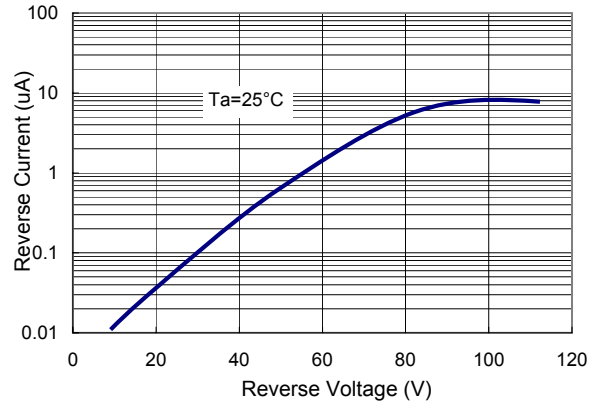

**FIG 3 Admissible Power Dissipation Curve**

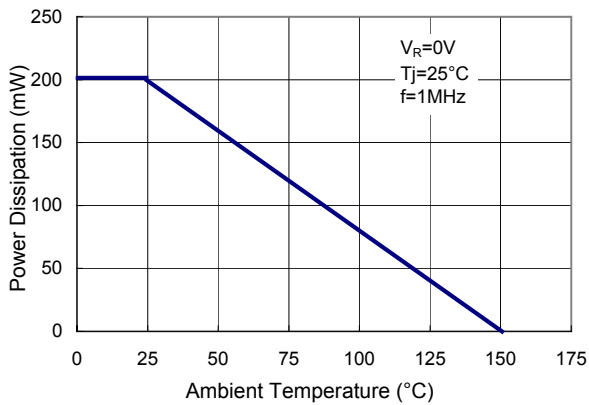

**FIG 4 Typical Junction Capacitance**

