



PNP POWER TRANSISTORS

COMPLEMENTARY TO THE TIP41 SERIES


TIP 42 Series

-40 ~ -100 VOLTS
-6 AMP, 65 WATTS

The TIP42 Series power transistors are designed for use in general purpose amplifier and switching applications.

Features:

- 65W at 25° C case temperature
- 6A continuous collector current
- 10A peak collector current
- Minimum f_T of 3 MHz at 10V, 0.5A
- Customer-specified selections available

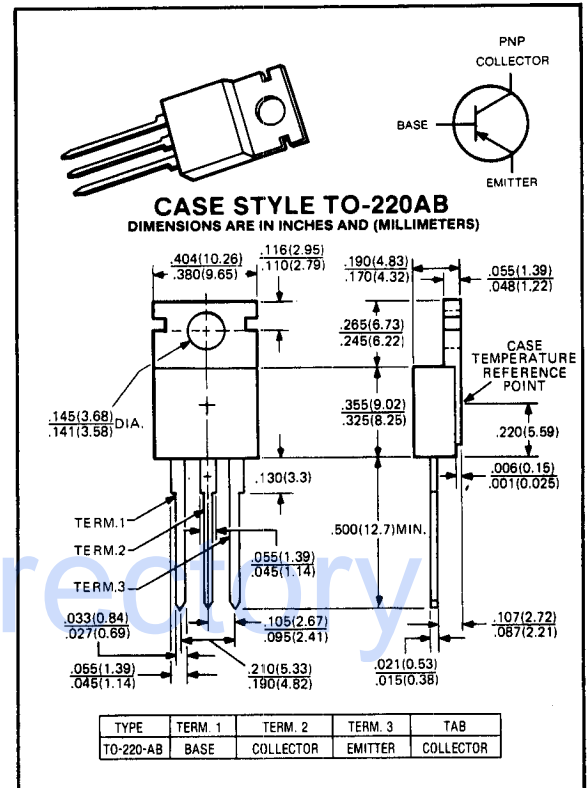

Datasheet.Directory

maximum ratings ($T_C = 25^\circ C$) (unless otherwise noted)

RATING	SYMBOL	TIP42	TIP42A	TIP42B	TIP42C	UNITS
Collector-Emitter Voltage	V_{CEO}	-40	-60	-80	-100	Volts
Collector-Base Voltage	V_{CBO}	-80	-100	-120	-140	Volts
Emitter Base Voltage	V_{EBO}	-5	-5	-5	-5	Volts
Collector Current — Continuous	I_C	-6	-6	-6	-6	A
Collector Current — Peak	I_{CM}	-10	-10	-10	-10	A
Base Current — Continuous	I_B	-3	-3	-3	-3	A
Total Power Dissipation @ $T_A = 25^\circ C$ @ $T_C = 25^\circ C$	P_D	2 65	2 65	2 65	2 65	Watts
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150	-65 to +150	-65 to +150	-65 to +150	$^\circ C$

thermal characteristics

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.92	1.92	1.92	1.92	$^\circ C/W$
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	250	250	250	250	$^\circ C$

electrical characteristics ($T_C = 25^\circ C$) (unless otherwise specified)

CHARACTERISTIC	SYMBOL	MIN	TYP	MAX	UNIT	
Collector-Emitter Breakdown Voltage ($I_C = 30\text{mA}$)	TIP42 TIP42A TIP42B TIP42C	V_{CEO}	-40 -60 -80 -100	— — — —	Volts	
Collector Cutoff Current ($V_{CE} = -30\text{V}$) ($V_{CE} = -60\text{V}$)	TIP42, TIP42A TIP42B, TIP42C	I_{CEO}	— —	— —	-0.7 -0.7	mA
Collector Cutoff Current ($V_{CE} = -80\text{V}$) ($V_{CE} = -100\text{V}$) ($V_{CE} = -120\text{V}$) ($V_{CE} = -140\text{V}$)	TIP42 TIP42A TIP42B TIP42C	I_{CES}	— — — —	— — — —	-0.4 -0.4 -0.4 -0.4	mA
Emitter Cutoff Current ($V_{EB} = -5\text{V}$, $I_C = 0$)		I_{EBO}	—	—	-1	mA

second breakdown


Second Breakdown with Base Forward Biased	FBSOA	SEE FIGURE 3
---	-------	--------------

on characteristics

DC Current Gain ($I_C = -3\text{A}$, $V_{CE} = -4\text{V}$) ($I_C = -3\text{A}$, $V_{CE} = -4\text{V}$)	h_{FE}	30 15	— —	— 75	—
Collector-Emitter Saturation Voltage ($I_C = -6\text{A}$, $I_B = -6\text{A}$)	$V_{CE(sat)}$	—	—	-1.5	V
Base-Emitter Voltage ($I_C = -6\text{A}$, $V_{CE} = -4\text{V}$)	$V_{BE(on)}$	—	—	-2	V

switching characteristics

Turn-on Time	$R_L = 5\Omega$, $I_C = -6\text{A}$ $I_{B1} = I_{B2} = 0.6\text{A}$ $V_{BE(off)} = 4\text{V}$	t_{on}	—	0.4	—	μs
Turn-off Time		t_{off}	—	0.7	—	

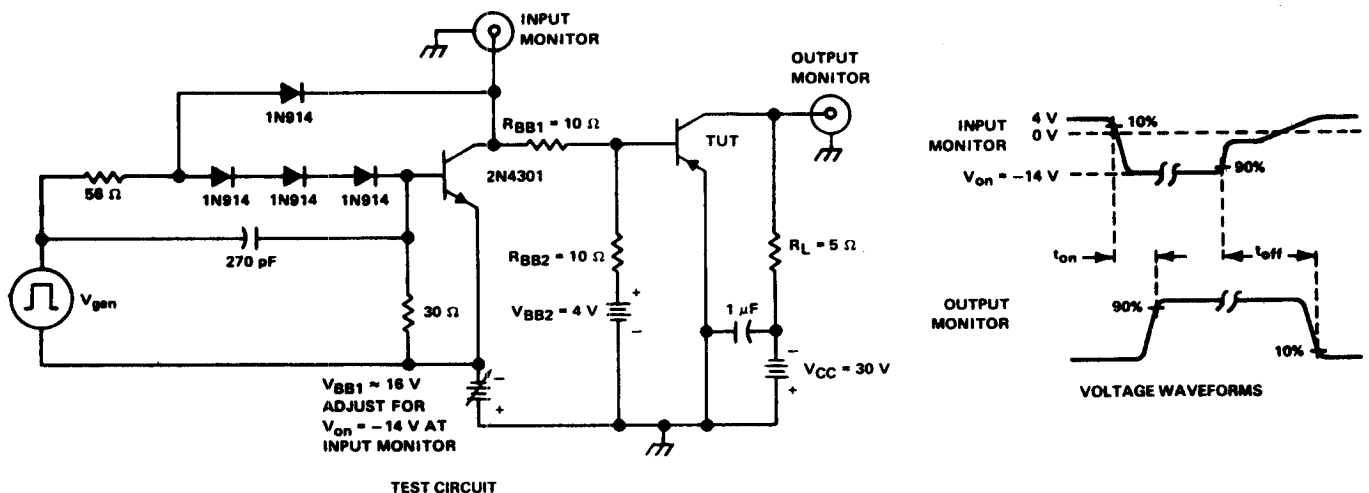

- NOTES: A. V_{gen} is a 30-V pulse into a 50 Ω termination.
 B. The V_{gen} waveform is supplied by a generator with the following characteristics: $t_r \leq 15\text{ ns}$, $t_f \leq 15\text{ ns}$, $Z_{out} = 50\ \Omega$, $t_w = 20\ \mu\text{s}$, duty cycle $\leq 2\%$.
 C. Waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq 15\text{ ns}$, $R_{in} \geq 10\text{ M}\Omega$, $C_{in} \leq 11.5\text{ pF}$.
 D. Resistors must be noninductive types.
 E. The d-c power supplies may require additional bypassing in order to minimize ringing.

FIGURE 1. RESISTIVE-LOAD SWITCHING

STATIC FORWARD CURRENT TRANSFER RATIO
vs
COLLECTOR CURRENT

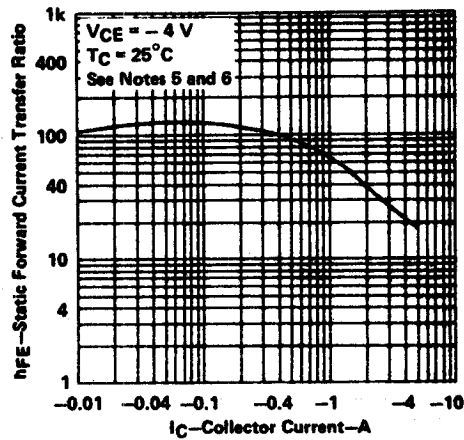


FIGURE 2. TYPICAL CHARACTERISTICS

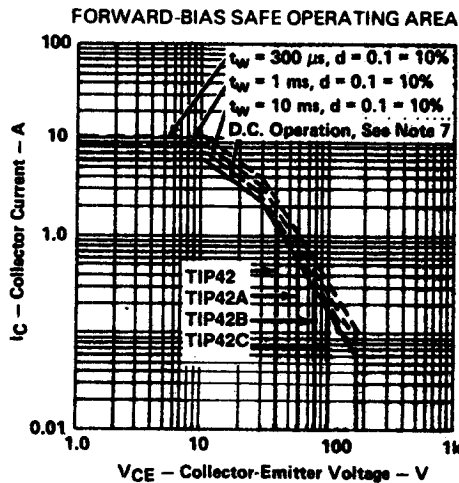


FIGURE 3 MAXIMUM SAFE OPERATING AREA

NOTE 7: This combination of maximum voltage and current may be achieved only when switching from saturation to cutoff with a clamped inductive load.

DISSIPATION DERATING CURVE

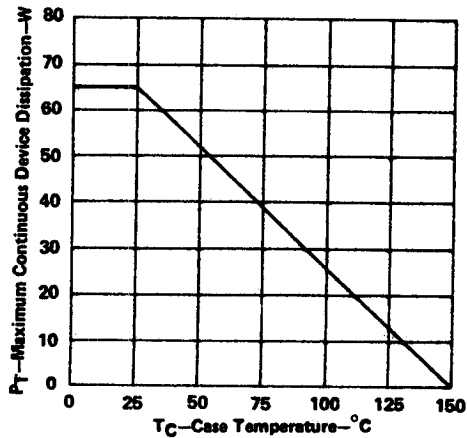


FIGURE 4 THERMAL INFORMATION