


- Metallized polyester
- According to CECC 30401-042, IEC 60384-2, DIN 44122




TYPICAL APPLICATIONS	CONSTRUCTION
By-passing, signal coupling. General purpose for highest reliability.	Metallized polyester film capacitor. Radial leads of tinned wire are electrically welded to the contact metal layer on the ends of the capacitor winding. Encapsulation in self-extinguishing material meeting the requirements of UL 94V-0.

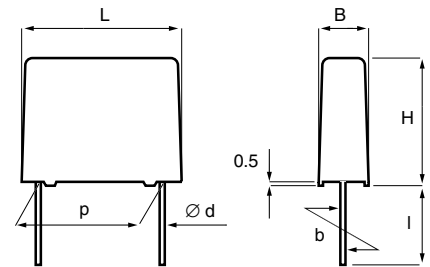


TECHNICAL DATA							
Rated voltage U_R , VDC	50	63	100	250	400	630	1000
	30	40	63	160	200	220	250
Rated voltage U_R , VAC	50	63	100	250	400	630	1000
	30	40	63	160	200	220	250
Capacitance, μF	0.001	0.001	0.001	0.001	0.001	0.001	0.001
	-10.0	-82	-82	-39	-18	-6.8	-4.7
Capacitance tolerance	$\pm 20\%$, $\pm 10\%$ standard, $\pm 5\%$.						
Category temperature range	-55 ... +100°C						
Voltage derating	Above +85°C DC and AC voltage derating is 1.25%/°C.						
Rated temperature	+85°C						
Climatic category	IEC 60068-1, 55/100/56 DIN 40040, FME -55 ... +100°C (+125°C) Average relative humidity $\leq 75\%$ RH = 95% for 30 days per year. RH = 85% for further days limited by average value per year, occasional slight condensation permitted.						
Test voltage	1.6 x U_R VDC for 2s						
Capacitance drift	Max. 2% after a 2 year storage period at a temperature of +10 ... +40°C and a relative humidity of 40...60%.						
Reliability	Operational life > 200 000 h. Failure rate < 3 FIT, T = +40°C, U = 0.5 x U_R . Failure criteria according to DIN 44122.						
Maximum pulse steepness:	dU/dt according to article table. For peak to peak voltages lower than rated voltage ($U_{pp} < U_R$), the specified dU/dt can be multiplied by the factor U_R/U_{pp} .						
Temperature coefficient	+400 (± 200) ppm/°C at 1 kHz						
Self inductance	Approximately 6 nH/cm for the total length of capacitor winding and the leads.						

p	d	std l	max l	b
5.0 ± 0.4	0.5	4 ⁺¹	20	± 0.4
7.5 ± 0.4	0.6	4 ⁺¹	20	± 0.4
10.0 ± 0.4	0.6	4 ⁺¹	30	± 0.4
15.0 ± 0.4	0.8	4 ⁺¹	30	± 0.4
22.5 ± 0.4	0.8	4 ⁺¹	30	± 0.4
27.5 ± 0.4	0.8	4 ⁺¹	30	± 0.4
37.5 ± 0.5	1.0	4 ⁺¹	30	± 0.7

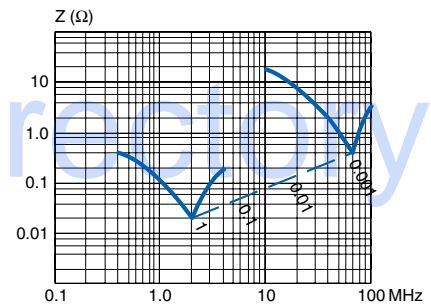

Resonance frequencies
MMK 5

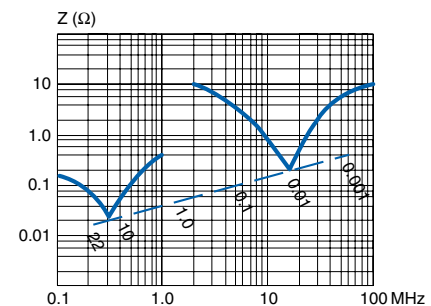

Resonance frequencies
MMK7.5 ... 37.5

ENVIRONMENTAL TEST DATA		
Damp heat test	Test conditions: Test criteria:	T = +40°C, RH = 93%, t = 56 days. $\Delta C/C \leq \pm 5\%$, $\Delta \tan \delta \leq 0.005$ (1kHz), IR after test 0.5 x IR min.
Endurance test	Test conditions: Test criteria:	T = +100°C, U = 1.25 x (0.8 x U_R), t = 2000 h. $\Delta C/C \leq \pm 5\%$, $\Delta \tan \delta \leq 0.005$ (1kHz) $\Delta \tan \delta \leq 0.010$ (100kHz) IR after test 0.5 x IR min.

TECHNICAL DATA

Dissipation factor $\tan\delta$

Maximum values at +23°C
 $C \leq 0.1 \mu\text{F}$ $0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$ $C > 1.0 \mu\text{F}$

MMK5	1 kHz	0.8%	0.8%	0.8%
	10 kHz	1.2%	1.2%	1.5%
	100 kHz	2.5%	3.0%	
MMK7.5 ... 37.5	1 kHz	0.8%	0.8%	1.0%
	10 kHz	1.5%	1.5%	
	100 kHz	3.0%		

Insulation resistance

Minimum values between terminals.
 Measured at +20°C, according to IEC 60384-2.
 $C \leq 0.33 \mu\text{F}$ $C > 0.33 \mu\text{F}$

$U_R \leq 100\text{V}$	15000 MΩ	5000 s
$U_R > 100\text{V}$	30000 MΩ	10000 s


ORDERING INFORMATION

See article table and pages 10 to 14 for options and article code construction.


MARKING

- Capacitance
- Tolerance code
- Rated voltage
- Capacitor family code MMK
- Manufacturing date code


RATED AC VOLTAGE VS. FREQUENCY

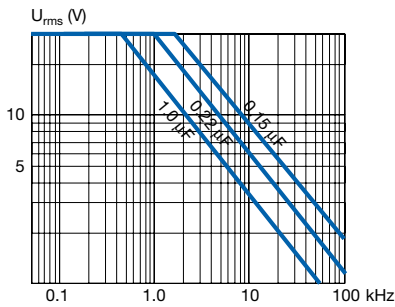


MMK5 50/30

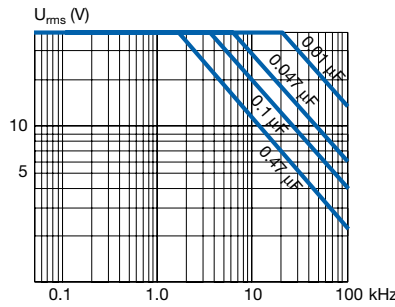


MMK5 63/40

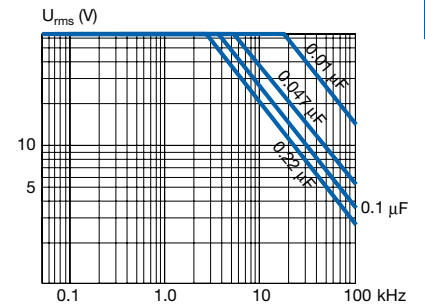


MMK5 100/63

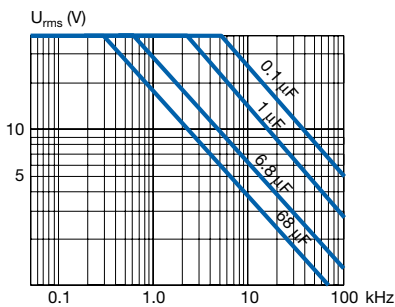


MMK7.5 ... 37.5 63/40

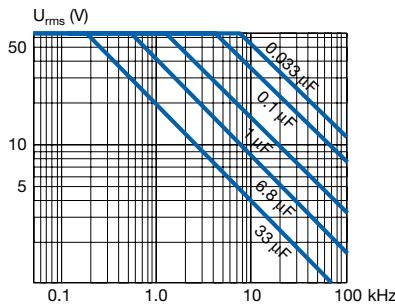


MMK7.5 ... 37.5 100/63

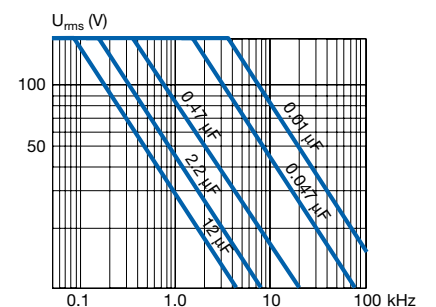


MMK7.5 ... 37.5 250/160

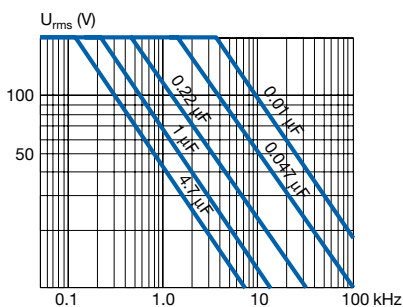

MMK7.5 ... 37.5 400/200

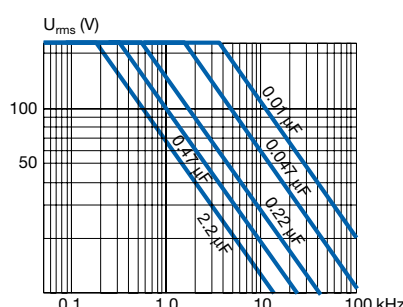

MMK7.5 ... 37.5 630/220

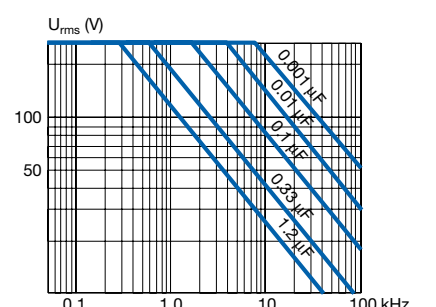

MMK7.5 ... 37.5 1000/250

ARTICLE TABLE

Capaci- Box Max dimen- Max
tance code sions in mm dU/dt
µF B H L V/µs Article code

Capaci- Box Max dimen- Max
tance code sions in mm dU/dt
µF B H L V/µs Article code

50 VDC/30 VAC

50 VDC/30 VAC

LEAD SPACING 5 MM

LEAD SPACING 7.5 MM

0.0010	J01	2.5	6.5	7.2	12	MMK5 102K50J01L4	BULK
0.0012	J01	2.5	6.5	7.2	12	MMK5 122K50J01L4	BULK
0.0015	J01	2.5	6.5	7.2	12	MMK5 152K50J01L4	BULK
0.0018	J01	2.5	6.5	7.2	12	MMK5 182K50J01L4	BULK
0.0022	J01	2.5	6.5	7.2	12	MMK5 222K50J01L4	BULK
0.0027	J01	2.5	6.5	7.2	12	MMK5 272K50J01L4	BULK
0.0033	J01	2.5	6.5	7.2	12	MMK5 332K50J01L4	BULK
0.0039	J01	2.5	6.5	7.2	12	MMK5 392K50J01L4	BULK
0.0047	J01	2.5	6.5	7.2	12	MMK5 472K50J01L4	BULK
0.0056	J01	2.5	6.5	7.2	12	MMK5 562K50J01L4	BULK
0.0068	J01	2.5	6.5	7.2	12	MMK5 682K50J01L4	BULK
0.0082	J01	2.5	6.5	7.2	12	MMK5 822K50J01L4	BULK
0.010	J01	2.5	6.5	7.2	12	MMK5 103K50J01L4	BULK
0.012	J01	2.5	6.5	7.2	12	MMK5 123K50J01L4	BULK
0.015	J01	2.5	6.5	7.2	12	MMK5 153K50J01L4	BULK
0.018	J01	2.5	6.5	7.2	12	MMK5 183K50J01L4	BULK
0.022	J01	2.5	6.5	7.2	12	MMK5 223K50J01L4	BULK
0.027	J01	2.5	6.5	7.2	12	MMK5 273K50J01L4	BULK
0.033	J01	2.5	6.5	7.2	12	MMK5 333K50J01L4	BULK
0.039	J01	2.5	6.5	7.2	12	MMK5 393K50J01L4	BULK
0.047	J01	2.5	6.5	7.2	12	MMK5 473K50J01L4	BULK
0.056	J01	2.5	6.5	7.2	12	MMK5 563K50J01L4	BULK
0.068	J01	2.5	6.5	7.2	12	MMK5 683K50J01L4	BULK
0.082	J01	2.5	6.5	7.2	12	MMK5 823K50J01L4	BULK
0.10	J01	2.5	6.5	7.2	12	MMK5 104K50J01L4	BULK
0.12	J01	2.5	6.5	7.2	12	MMK5 124K50J01L4	BULK
0.15	J01	2.5	6.5	7.2	12	MMK5 154K50J01L4	BULK
0.18	J01	2.5	6.5	7.2	12	MMK5 184K50J01L4	BULK
0.22	J01	2.5	6.5	7.2	12	MMK5 224K50J01L4	BULK
0.27	J01	2.5	6.5	7.2	12	MMK5 274K50J01L4	BULK
0.33	J01	2.5	6.5	7.2	12	MMK5 334K50J01L4	BULK
0.39	J01	2.5	6.5	7.2	12	MMK5 394K50J01L4	BULK
0.47	J01	2.5	6.5	7.2	12	MMK5 474K50J01L4	BULK
0.56	J02	3.5	8.0	7.2	12	MMK5 564K50J02L4	BULK
0.68	J02	3.5	8.0	7.2	12	MMK5 684K50J02L4	BULK
0.82	J02	3.5	8.0	7.2	12	MMK5 824K50J02L4	BULK
1.0	J02	3.5	8.0	7.2	12	MMK5 105K50J02L4	BULK
1.2	J03	4.5	9.0	7.2	12	MMK5 125K50J03L4	BULK
1.5	J03	4.5	9.0	7.2	12	MMK5 155K50J03L4	BULK
1.8	J04	5.0	10.0	7.2	12	MMK5 185K50J04L4	BULK
2.2	J04	5.0	10.0	7.2	12	MMK5 225K50J04L4	BULK
2.7	J05	6.0	11.0	7.2	12	MMK5 275K50J05L4	BULK
3.3	J05	6.0	11.0	7.2	12	MMK5 335K50J05L4	BULK
3.9	J06	7.2	13.0	7.2	12	MMK5 395K50J06L4	BULK
4.7	J06	7.2	13.0	7.2	12	MMK5 475K50J06L4	BULK
5.6	J06	7.2	13.0	7.2	12	MMK5 565K50J06L4	BULK
6.0	J06	7.2	13.0	7.2	12	MMK5 605K50J06L4	BULK

LEAD SPACING 7.5 MM

0.0010	K00	2.5	6.0	10.0	5	MMK7.5 102K50K00L4	BULK
0.0012	K00	2.5	6.0	10.0	5	MMK7.5 122K50K00L4	BULK
0.0015	K00	2.5	6.0	10.0	5	MMK7.5 152K50K00L4	BULK
0.0018	K00	2.5	6.0	10.0	5	MMK7.5 182K50K00L4	BULK
0.0022	K00	2.5	6.0	10.0	5	MMK7.5 222K50K00L4	BULK
0.0027	K00	2.5	6.0	10.0	5	MMK7.5 272K50K00L4	BULK
0.0033	K00	2.5	6.0	10.0	5	MMK7.5 332K50K00L4	BULK
0.0039	K00	2.5	6.0	10.0	5	MMK7.5 392K50K00L4	BULK
0.0047	K00	2.5	6.0	10.0	5	MMK7.5 472K50K00L4	BULK
0.0056	K00	2.5	6.0	10.0	5	MMK7.5 562K50K00L4	BULK

0.0068	K00	2.5	6.0	10.0	5	MMK7.5 682K50K00L4	BULK
0.0082	K00	2.5	6.0	10.0	5	MMK7.5 822K50K00L4	BULK
0.010	K00	2.5	6.0	10.0	5	MMK7.5 103K50K00L4	BULK
0.012	K00	2.5	6.0	10.0	5	MMK7.5 123K50K00L4	BULK
0.015	K00	2.5	6.0	10.0	5	MMK7.5 153K50K00L4	BULK
0.018	K00	2.5	6.0	10.0	5	MMK7.5 183K50K00L4	BULK
0.022	K00	2.5	6.0	10.0	5	MMK7.5 223K50K00L4	BULK
0.027	K00	2.5	6.0	10.0	5	MMK7.5 273K50K00L4	BULK
0.033	K00	2.5	6.0	10.0	5	MMK7.5 333K50K00L4	BULK
0.039	K00	2.5	6.0	10.0	5	MMK7.5 393K50K00L4	BULK
0.047	K00	2.5	6.0	10.0	5	MMK7.5 473K50K00L4	BULK
0.056	K00	2.5	6.0	10.0	5	MMK7.5 563K50K00L4	BULK
0.068	K00	2.5	6.0	10.0	5	MMK7.5 683K50K00L4	BULK
0.082	K00	2.5	6.0	10.0	5	MMK7.5 823K50K00L4	BULK
0.10	K00	2.5	6.0	10.0	5	MMK7.5 104K50K00L4	BULK
0.12	K00	2.5	6.0	10.0	5	MMK7.5 124K50K00L4	BULK
0.15	K00	2.5	6.0	10.0	5	MMK7.5 154K50K00L4	BULK
0.18	K00	2.5	6.0	10.0	5	MMK7.5 184K50K00L4	BULK
0.22	K00	2.5	6.0	10.0	5	MMK7.5 224K50K00L4	BULK
0.27	K00	2.5	6.0	10.0	5	MMK7.5 274K50K00L4	BULK
0.33	K00	2.5	6.0	10.0	5	MMK7.5 334K50K00L4	BULK
0.39	K01	4.0	8.0	10.0	5	MMK7.5 394K50K01L4	BULK
0.47	K01	4.0	8.0	10.0	5	MMK7.5 474K50K01L4	BULK
0.56	K01	4.0	8.0	10.0	5	MMK7.5 564K50K01L4	BULK
0.68	K01	4.0	8.0	10.0	5	MMK7.5 684K50K01L4	BULK
0.82	K01	4.0	8.0	10.0	5	MMK7.5 824K50K01L4	BULK
1.0	K01	4.0	8.0	10.0	5	MMK7.5 105K50K01L4	BULK
1.2	K03	5.0	11.0	10.0	5	MMK7.5 125K50K03L4	BULK
1.5	K03	5.0	11.0	10.0	5	MMK7.5 155K50K03L4	BULK
1.8	K03	5.0	11.0	10.0	5	MMK7.5 185K50K03L4	BULK
2.2	K04	6.0	12.0	10.5	5	MMK7.5 225K50K04L4	BULK
2.7	K04	6.0	12.0	10.5	5	MMK7.5 275K50K04L4	BULK
3.3	K04	6.0	12.0	10.5	5	MMK7.5 335K50K04L4	BULK

LEAD SPACING 10 MM

1.0	A01	4.0	9.0	13.0	4	MMK10 105K50A01L4	BULK
1.2	A01	4.0	9.0	13.0	4	MMK10 125K50A01L4	BULK
1.5	A02	4.5	10.5	13.0	4	MMK10 155K50A02L4	BULK
1.8	A03	5.0	11.0	13.0	4	MMK10 185K50A03L4	BULK
2.2	A03	5.0	11.0	13.0	4	MMK10 225K50A03L4	BULK
2.7	A04	6.0	12.0	13.0	4	MMK10 275K50A04L4	BULK

LEAD SPACING 15 MM

2.0	B04	5.5	10.5	18.0	3	MMK15 205K50B04L4	BULK
2.2	B04	5.5	10.5	18.0	3	MMK15 225K50B04L4	BULK
2.7	B05	5.5	12.5	18.0	3	MMK15 275K50B05L4	BULK
3.3	B05	5.5	12.5	18.0	3	MMK15 335K50B05L4	BULK
3.9	B10	6.5	12.5	18.0	3	MMK15 395K50B10L4	BULK
4.7	B06	7.5	14.5	18.0	3	MMK15 475K50B06L4	BULK
5.6	B06	7.5	14.5	18.0	3	MMK15 565K50B06L4	BULK
6.8	B12	8.0	15.0	18.0	3	MMK15 685K50B12L4	BULK
8.2	B11	8.5	16.0	18.0	3	MMK15 825K50B11L4	BULK
10.0	B14	9.5	17.5	18.0	3	MMK15 106K50B14L4	BULK

ARTICLE TABLE

Capacitance µF	Box code	Max dimensions in mm			Max dU/dt V/µs	Article code							
		B	H	L			Capacitance µF	Box code	Max dimensions in mm			Max dU/dt V/µs	Article code
63 VDC/40 VAC						63 VDC/40 VAC							
LEAD SPACING 5 MM						LEAD SPACING 7.5 MM							
0.0010	J01	2.5	6.5	7.2	25	MMK5 102K63J01L4 BULK	0.022	K00	2.5	6.0	10.0	10	MMK7.5 223K63K00L4 BULK
0.0012	J01	2.5	6.5	7.2	25	MMK5 122K63J01L4 BULK	0.027	K00	2.5	6.0	10.0	10	MMK7.5 273K63K00L4 BULK
0.0015	J01	2.5	6.5	7.2	25	MMK5 152K63J01L4 BULK	0.033	K00	2.5	6.0	10.0	10	MMK7.5 333K63K00L4 BULK
0.0018	J01	2.5	6.5	7.2	25	MMK5 182K63J01L4 BULK	0.039	K00	2.5	6.0	10.0	10	MMK7.5 393K63K00L4 BULK
0.0022	J01	2.5	6.5	7.2	25	MMK5 222K63J01L4 BULK	0.047	K00	2.5	6.0	10.0	10	MMK7.5 473K63K00L4 BULK
0.0027	J01	2.5	6.5	7.2	25	MMK5 272K63J01L4 BULK	0.056	K00	2.5	6.0	10.0	10	MMK7.5 563K63K00L4 BULK
0.0033	J01	2.5	6.5	7.2	25	MMK5 332K63J01L4 BULK	0.068	K00	2.5	6.0	10.0	10	MMK7.5 683K63K00L4 BULK
0.0039	J01	2.5	6.5	7.2	25	MMK5 392K63J01L4 BULK	0.082	K00	2.5	6.0	10.0	10	MMK7.5 823K63K00L4 BULK
0.0047	J01	2.5	6.5	7.2	25	MMK5 472K63J01L4 BULK	0.10	K00	2.5	6.0	10.0	10	MMK7.5 104K63K00L4 BULK
0.0056	J01	2.5	6.5	7.2	25	MMK5 562K63J01L4 BULK	0.12	K00	2.5	6.0	10.0	10	MMK7.5 124K63K00L4 BULK
0.0068	J01	2.5	6.5	7.2	25	MMK5 682K63J01L4 BULK	0.15	K00	2.5	6.0	10.0	10	MMK7.5 154K63K00L4 BULK
0.0082	J01	2.5	6.5	7.2	25	MMK5 822K63J01L4 BULK	0.18	K00	2.5	6.0	10.0	10	MMK7.5 184K63K00L4 BULK
0.010	J01	2.5	6.5	7.2	25	MMK5 103K63J01L4 BULK	0.22	K01	4.0	8.0	10.0	10	MMK7.5 224K63K01L4 BULK
0.012	J01	2.5	6.5	7.2	25	MMK5 123K63J01L4 BULK	0.27	K01	4.0	8.0	10.0	10	MMK7.5 274K63K01L4 BULK
0.015	J01	2.5	6.5	7.2	25	MMK5 153K63J01L4 BULK	0.33	K01	4.0	8.0	10.0	10	MMK7.5 334K63K01L4 BULK
0.018	J01	2.5	6.5	7.2	25	MMK5 183K63J01L4 BULK	0.39	K01	4.0	8.0	10.0	10	MMK7.5 394K63K01L4 BULK
0.022	J01	2.5	6.5	7.2	25	MMK5 223K63J01L4 BULK	0.47	K01	4.0	8.0	10.0	10	MMK7.5 474K63K01L4 BULK
0.027	J01	2.5	6.5	7.2	25	MMK5 273K63J01L4 BULK	0.56	K03	5.0	11.0	10.0	10	MMK7.5 564K63K03L4 BULK
0.033	J01	2.5	6.5	7.2	25	MMK5 333K63J01L4 BULK	0.68	K03	5.0	11.0	10.0	10	MMK7.5 684K63K03L4 BULK
0.039	J01	2.5	6.5	7.2	25	MMK5 393K63J01L4 BULK	0.82	K03	5.0	11.0	10.0	10	MMK7.5 824K63K03L4 BULK
0.047	J01	2.5	6.5	7.2	25	MMK5 473K63J01L4 BULK	1.0	K03	5.0	11.0	10.0	10	MMK7.5 105K63K03L4 BULK
0.056	J01	2.5	6.5	7.2	25	MMK5 563K63J01L4 BULK	1.2	K04	6.0	12.0	10.5	10	MMK7.5 125K63K04L4 BULK
0.068	J01	2.5	6.5	7.2	25	MMK5 683K63J01L4 BULK	1.5	K04	6.0	12.0	10.5	10	MMK7.5 155K63K04L4 BULK
0.082	J01	2.5	6.5	7.2	25	MMK5 823K63J01L4 BULK	LEAD SPACING 10 MM						
0.10	J01	2.5	6.5	7.2	25	MMK5 104K63J01L4 BULK	0.0010	A01	4.0	9.0	13.0	8	MMK10 102K63A01L4 BULK
0.12	J01	2.5	6.5	7.2	25	MMK5 124K63J01L4 BULK	0.0012	A01	4.0	9.0	13.0	8	MMK10 122K63A01L4 BULK
0.15	J01	2.5	6.5	7.2	25	MMK5 154K63J01L4 BULK	0.0015	A01	4.0	9.0	13.0	8	MMK10 152K63A01L4 BULK
0.18	J01	2.5	6.5	7.2	25	MMK5 184K63J01L4 BULK	0.0018	A01	4.0	9.0	13.0	8	MMK10 182K63A01L4 BULK
0.22	J01	2.5	6.5	7.2	25	MMK5 224K63J01L4 BULK	0.0022	A01	4.0	9.0	13.0	8	MMK10 222K63A01L4 BULK
0.27	J02	3.5	8.0	7.2	25	MMK5 274K63J02L4 BULK	0.0027	A01	4.0	9.0	13.0	8	MMK10 272K63A01L4 BULK
0.33	J02	3.5	8.0	7.2	25	MMK5 334K63J02L4 BULK	0.0033	A01	4.0	9.0	13.0	8	MMK10 332K63A01L4 BULK
0.39	J02	3.5	8.0	7.2	25	MMK5 394K63J02L4 BULK	0.0039	A01	4.0	9.0	13.0	8	MMK10 392K63A01L4 BULK
0.47	J02	3.5	8.0	7.2	25	MMK5 474K63J02L4 BULK	0.0047	A01	4.0	9.0	13.0	8	MMK10 472K63A01L4 BULK
0.56	J03	4.5	9.0	7.2	25	MMK5 564K63J03L4 BULK	0.0056	A01	4.0	9.0	13.0	8	MMK10 562K63A01L4 BULK
0.68	J03	4.5	9.0	7.2	25	MMK5 684K63J03L4 BULK	0.0068	A01	4.0	9.0	13.0	8	MMK10 682K63A01L4 BULK
0.82	J04	5.0	10.0	7.2	25	MMK5 824K63J04L4 BULK	0.0078	A01	4.0	9.0	13.0	8	MMK10 782K63A01L4 BULK
1.0	J04	5.0	10.0	7.2	25	MMK5 105K63J04L4 BULK	0.0082	A01	4.0	9.0	13.0	8	MMK10 822K63A01L4 BULK
1.2	J05	6.0	11.0	7.2	25	MMK5 125K63J05L4 BULK	0.010	A01	4.0	9.0	13.0	8	MMK10 103K63A01L4 BULK
1.5	J05	6.0	11.0	7.2	25	MMK5 155K63J05L4 BULK	0.012	A01	4.0	9.0	13.0	8	MMK10 123K63A01L4 BULK
1.8	J06	7.2	13.0	7.2	25	MMK5 185K63J06L4 BULK	0.015	A01	4.0	9.0	13.0	8	MMK10 153K63A01L4 BULK
2.2	J06	7.2	13.0	7.2	25	MMK5 225K63J06L4 BULK	0.018	A01	4.0	9.0	13.0	8	MMK10 183K63A01L4 BULK
LEAD SPACING 7.5 MM						0.022	A01	4.0	9.0	13.0	8	MMK10 223K63A01L4 BULK	
0.0010	K00	2.5	6.0	10.0	10	MMK7.5 102K63K00L4 BULK	0.027	A01	4.0	9.0	13.0	8	MMK10 273K63A01L4 BULK
0.0012	K00	2.5	6.0	10.0	10	MMK7.5 122K63K00L4 BULK	0.033	A01	4.0	9.0	13.0	8	MMK10 333K63A01L4 BULK
0.0015	K00	2.5	6.0	10.0	10	MMK7.5 152K63K00L4 BULK	0.039	A01	4.0	9.0	13.0	8	MMK10 393K63A01L4 BULK
0.0018	K00	2.5	6.0	10.0	10	MMK7.5 182K63K00L4 BULK	0.047	A01	4.0	9.0	13.0	8	MMK10 473K63A01L4 BULK
0.0022	K00	2.5	6.0	10.0	10	MMK7.5 222K63K00L4 BULK	0.056	A01	4.0	9.0	13.0	8	MMK10 563K63A01L4 BULK
0.0027	K00	2.5	6.0	10.0	10	MMK7.5 272K63K00L4 BULK	0.068	A01	4.0	9.0	13.0	8	MMK10 683K63A01L4 BULK
0.0033	K00	2.5	6.0	10.0	10	MMK7.5 332K63K00L4 BULK	0.082	A01	4.0	9.0	13.0	8	MMK10 823K63A01L4 BULK
0.0039	K00	2.5	6.0	10.0	10	MMK7.5 392K63K00L4 BULK	0.10	A01	4.0	9.0	13.0	8	MMK10 104K63A01L4 BULK
0.0047	K00	2.5	6.0	10.0	10	MMK7.5 472K63K00L4 BULK	0.12	A01	4.0	9.0	13.0	8	MMK10 124K63A01L4 BULK
0.0056	K00	2.5	6.0	10.0	10	MMK7.5 562K63K00L4 BULK	0.15	A01	4.0	9.0	13.0	8	MMK10 154K63A01L4 BULK
0.0068	K00	2.5	6.0	10.0	10	MMK7.5 682K63K00L4 BULK	0.18	A01	4.0	9.0	13.0	8	MMK10 184K63A01L4 BULK
0.0082	K00	2.5	6.0	10.0	10	MMK7.5 822K63K00L4 BULK	0.22	A01	4.0	9.0	13.0	8	MMK10 224K63A01L4 BULK
0.010	K00	2.5	6.0	10.0	10	MMK7.5 103K63K00L4 BULK	0.27	A01	4.0	9.0	13.0	8	MMK10 274K63A01L4 BULK
0.012	K00	2.5	6.0	10.0	10	MMK7.5 123K63K00L4 BULK	0.33	A01	4.0	9.0	13.0	8	MMK10 334K63A01L4 BULK
0.015	K00	2.5	6.0	10.0	10	MMK7.5 153K63K00L4 BULK	0.39	A01	4.0	9.0	13.0	8	MMK10 394K63A01L4 BULK
0.018	K00	2.5	6.0	10.0	10	MMK7.5 183K63K00L4 BULK	0.47	A01	4.0	9.0	13.0	8	MMK10 474K63A01L4 BULK

ARTICLE TABLE

Capaci- Box Max dimen- Max
tance code sions in mm dU/dt
µF B H L V/µs Article code

Capaci- Box Max dimen- Max
tance code sions in mm dU/dt
µF B H L V/µs Article code

63 VDC/40 VAC

63 VDC/40 VAC

LEAD SPACING 10 MM

LEAD SPACING 37.5 MM

0.56	A01	4.0	9.0	13.0	8	MMK10 564K63A01L4 BULK
0.68	A01	4.0	9.0	13.0	8	MMK10 684K63A01L4 BULK
0.82	A01	4.0	9.0	13.0	8	MMK10 824K63A01L4 BULK
1.0	A02	4.5	10.5	13.0	8	MMK10 105K63A02L4 BULK
1.2	A02	4.5	10.5	13.0	8	MMK10 125K63A02L4 BULK
1.5	A03	5.0	11.0	13.0	8	MMK10 155K63A03L4 BULK
1.8	A04	6.0	12.0	13.0	8	MMK10 185K63A04L4 BULK
2.2	A04	6.0	12.0	13.0	8	MMK10 225K63A04L4 BULK

27	R05	13.0	24.0	41.0	1	MMK37.5 276K63R05L4 TRAY
33	R04	15.0	26.0	41.0	1	MMK37.5 336K63R04L4 TRAY
39	R04	15.0	26.0	41.0	1	MMK37.5 396K63R04L4 TRAY
47	R02	16.5	32.0	41.0	1	MMK37.5 476K63R02L4 TRAY
56	R03	19.0	36.0	41.0	1	MMK37.5 566K63R03L4 TRAY
68	R03	19.0	36.0	41.0	1	MMK37.5 686K63R03L4 TRAY
82	R06	21.0	38.0	41.0	1	MMK37.5 826K63R06L4 TRAY

LEAD SPACING 15 MM

100 VDC/63 VAC

LEAD SPACING 5 MM

0.68	B04	5.5	10.5	18.0	5	MMK15 684K63B04L4 BULK
0.82	B04	5.5	10.5	18.0	5	MMK15 824K63B04L4 BULK
1.0	B04	5.5	10.5	18.0	5	MMK15 105K63B04L4 BULK
1.2	B04	5.5	10.5	18.0	5	MMK15 125K63B04L4 BULK
1.5	B04	5.5	10.5	18.0	5	MMK15 155K63B04L4 BULK
1.8	B04	5.5	10.5	18.0	5	MMK15 185K63B04L4 BULK
2.0	B05	5.5	12.5	18.0	5	MMK15 205K63B05L4 BULK
2.2	B05	5.5	12.5	18.0	5	MMK15 225K63B05L4 BULK
2.7	B10	6.5	12.5	18.0	5	MMK15 275K63B10L4 BULK
3.3	B10	6.5	12.5	18.0	5	MMK15 335K63B10L4 BULK
3.9	B06	7.5	14.5	18.0	5	MMK15 395K63B06L4 BULK
4.7	B06	7.5	14.5	18.0	5	MMK15 475K63B06L4 BULK
5.6	B11	8.5	16.0	18.0	5	MMK15 565K63B11L4 BULK
6.8	B14	9.5	17.5	18.0	5	MMK15 685K63B14L4 BULK

0.0010	J01	2.5	6.5	7.2	30	MMK5 102K100J01L4 BULK
0.0012	J01	2.5	6.5	7.2	30	MMK5 122K100J01L4 BULK
0.0015	J01	2.5	6.5	7.2	30	MMK5 152K100J01L4 BULK
0.0018	J01	2.5	6.5	7.2	30	MMK5 182K100J01L4 BULK
0.0022	J01	2.5	6.5	7.2	30	MMK5 222K100J01L4 BULK
0.0027	J01	2.5	6.5	7.2	30	MMK5 272K100J01L4 BULK
0.0033	J01	2.5	6.5	7.2	30	MMK5 332K100J01L4 BULK
0.0039	J01	2.5	6.5	7.2	30	MMK5 392K100J01L4 BULK
0.0047	J01	2.5	6.5	7.2	30	MMK5 472K100J01L4 BULK
0.0056	J01	2.5	6.5	7.2	30	MMK5 562K100J01L4 BULK
0.0068	J01	2.5	6.5	7.2	30	MMK5 682K100J01L4 BULK
0.0082	J01	2.5	6.5	7.2	30	MMK5 822K100J01L4 BULK
0.010	J01	2.5	6.5	7.2	30	MMK5 103K100J01L4 BULK
0.012	J01	2.5	6.5	7.2	30	MMK5 123K100J01L4 BULK
0.015	J01	2.5	6.5	7.2	30	MMK5 153K100J01L4 BULK
0.018	J01	2.5	6.5	7.2	30	MMK5 183K100J01L4 BULK
0.022	J01	2.5	6.5	7.2	30	MMK5 223K100J01L4 BULK
0.027	J01	2.5	6.5	7.2	30	MMK5 273K100J01L4 BULK
0.033	J01	2.5	6.5	7.2	30	MMK5 333K100J01L4 BULK
0.039	J01	2.5	6.5	7.2	30	MMK5 393K100J01L4 BULK
0.047	J01	2.5	6.5	7.2	30	MMK5 473K100J01L4 BULK
0.056	J01	2.5	6.5	7.2	30	MMK5 563K100J01L4 BULK
0.068	J01	2.5	6.5	7.2	30	MMK5 683K100J01L4 BULK
0.082	J01	2.5	6.5	7.2	30	MMK5 823K100J01L4 BULK
0.10	J01	2.5	6.5	7.2	30	MMK5 104K100J01L4 BULK
0.12	J02	3.5	8.0	7.2	30	MMK5 124K100J02L4 BULK
0.15	J02	3.5	8.0	7.2	30	MMK5 154K100J02L4 BULK
0.18	J02	3.5	8.0	7.2	30	MMK5 184K100J02L4 BULK
0.22	J02	3.5	8.0	7.2	30	MMK5 224K100J02L4 BULK
0.27	J03	4.5	9.0	7.2	30	MMK5 274K100J03L4 BULK
0.33	J03	4.5	9.0	7.2	30	MMK5 334K100J03L4 BULK
0.39	J04	5.0	10.0	7.2	30	MMK5 394K100J04L4 BULK
0.47	J04	5.0	10.0	7.2	30	MMK5 474K100J04L4 BULK
0.56	J05	6.0	11.0	7.2	30	MMK5 564K100J05L4 BULK
0.68	J05	6.0	11.0	7.2	30	MMK5 684K100J05L4 BULK
0.82	J06	7.2	13.0	7.2	30	MMK5 824K100J06L4 BULK
1.0	J06	7.2	13.0	7.2	30	MMK5 105K100J06L4 BULK

LEAD SPACING 22.5 MM

LEAD SPACING 7.5 MM

3.3	D13	6.5	14.5	26.0	3	MMK22.5 335K63D13L4 TRAY
3.9	D13	6.5	14.5	26.0	3	MMK22.5 395K63D13L4 TRAY
4.7	D13	6.5	14.5	26.0	3	MMK22.5 475K63D13L4 TRAY
5.6	D17	7.0	16.5	26.0	3	MMK22.5 565K63D17L4 TRAY
6.8	D17	7.0	16.5	26.0	3	MMK22.5 685K63D17L4 TRAY
8.2	D14	8.0	16.0	26.0	3	MMK22.5 825K63D14L4 TRAY
10	D15	9.0	18.5	26.0	3	MMK22.5 106K63D15L4 TRAY
12	D18	10.5	19.0	26.0	3	MMK22.5 126K63D18L4 TRAY
15	D16	11.0	21.5	26.0	3	MMK22.5 156K63D16L4 TRAY
18	D20	13.5	23.0	26.0	3	MMK22.5 186K63D20L4 TRAY
22	D19	15.5	24.5	26.0	3	MMK22.5 226K63D19L4 TRAY

LEAD SPACING 27.5 MM

8.2	F11	10.5	20.5	31.5	2	MMK27.5 825K63F11L4 TRAY
10	F11	10.5	20.5	31.5	2	MMK27.5 106K63F11L4 TRAY
12	F11	10.5	20.5	31.5	2	MMK27.5 126K63F11L4 TRAY
15	F12	11.5	22.5	31.5	2	MMK27.5 156K63F12L4 TRAY
15	F17	21.0	12.5	31.5	2	MMK27.5 156K63F17L4 TRAY
18	F12	11.5	22.5	31.5	2	MMK27.5 186K63F12L4 TRAY
22	F13	14.5	24.5	31.5	2	MMK27.5 226K63F13L4 TRAY
27	F14	17.5	28.0	31.5	2	MMK27.5 276K63F14L4 TRAY
33	F14	17.5	28.0	31.5	2	MMK27.5 336K63F14L4 TRAY
33	F19	27.5	16.0	31.5	2	MMK27.5 336K63F19L4 TRAY
39	F15	19.0	29.0	31.5	2	MMK27.5 396K63F15L4 TRAY
47	F16	21.0	30.0	31.5	2	MMK27.5 476K63F16L4 TRAY
47	F18	31.0	19.0	31.5	2	MMK27.5 476K63F18L4 TRAY

0.0010	K00	2.5	6.0	10.0	20	MMK7.5 102K100K00L4 BULK
0.0012	K00	2.5	6.0	10.0	20	MMK7.5 122K100K00L4 BULK
0.0015	K00	2.5	6.0	10.0	20	MMK7.5 152K100K00L4 BULK
0.0018	K00	2.5	6.0	10.0	20	MMK7.5 182K100K00L4 BULK
0.0022	K00	2.5	6.0	10.0	20	MMK7.5 222K100K00L4 BULK
0.0027	K00	2.5	6.0	10.0	20	MMK7.5 272K100K00L4 BULK
0.0033	K00	2.5	6.0	10.0	20	MMK7.5 332K100K00L4 BULK
0.0039	K00	2.5	6.0	10.0	20	MMK7.5 392K100K00L4 BULK
0.0047	K00	2.5	6.0	10.0	20	MMK7.5 472K100K00L4 BULK
0.0056	K00	2.5	6.0	10.0	20	MMK7.5 562K100K00L4 BULK

ARTICLE TABLE

Capacitance µF	Box code	Max dimensions in mm			Max dU/dt V/µs	Article code
		B	H	L		
100 VDC/63 VAC						
LEAD SPACING 7.5 MM						
0.0068	K00	2.5	6.0	10.0	20	MMK7.5 682K100K00L4 BULK
0.0082	K00	2.5	6.0	10.0	20	MMK7.5 822K100K00L4 BULK
0.010	K00	2.5	6.0	10.0	20	MMK7.5 103K100K00L4 BULK
0.012	K00	2.5	6.0	10.0	20	MMK7.5 123K100K00L4 BULK
0.015	K00	2.5	6.0	10.0	20	MMK7.5 153K100K00L4 BULK
0.018	K00	2.5	6.0	10.0	20	MMK7.5 183K100K00L4 BULK
0.022	K00	2.5	6.0	10.0	20	MMK7.5 223K100K00L4 BULK
0.027	K00	2.5	6.0	10.0	20	MMK7.5 273K100K00L4 BULK
0.033	K00	2.5	6.0	10.0	20	MMK7.5 333K100K00L4 BULK
0.039	K00	2.5	6.0	10.0	20	MMK7.5 393K100K00L4 BULK
0.047	K00	2.5	6.0	10.0	20	MMK7.5 473K100K00L4 BULK
0.056	K00	2.5	6.0	10.0	20	MMK7.5 563K100K00L4 BULK
0.068	K00	2.5	6.0	10.0	20	MMK7.5 683K100K00L4 BULK
0.082	K00	2.5	6.0	10.0	20	MMK7.5 823K100K00L4 BULK
0.10	K00	2.5	6.0	10.0	20	MMK7.5 104K100K00L4 BULK
0.12	K01	4.0	8.0	10.0	20	MMK7.5 124K100K01L4 BULK
0.15	K01	4.0	8.0	10.0	20	MMK7.5 154K100K01L4 BULK
0.18	K01	4.0	8.0	10.0	20	MMK7.5 184K100K01L4 BULK
0.22	K01	4.0	8.0	10.0	20	MMK7.5 224K100K01L4 BULK
0.27	K01	4.0	8.0	10.0	20	MMK7.5 274K100K01L4 BULK
0.33	K03	5.0	11.0	10.0	20	MMK7.5 334K100K03L4 BULK
0.39	K03	5.0	11.0	10.0	20	MMK7.5 394K100K03L4 BULK
0.47	K03	5.0	11.0	10.0	20	MMK7.5 474K100K03L4 BULK
0.56	K03	5.0	11.0	10.0	20	MMK7.5 564K100K03L4 BULK
0.68	K03	5.0	11.0	10.0	20	MMK7.5 684K100K03L4 BULK
0.82	K04	6.0	12.0	10.5	20	MMK7.5 824K100K04L4 BULK
1.0	K04	6.0	12.0	10.5	20	MMK7.5 105K100K04L4 BULK

LEAD SPACING 10 MM						
0.0010	A01	4.0	9.0	13.0	12	MMK10 102K100A01L4 BULK
0.0012	A01	4.0	9.0	13.0	12	MMK10 122K100A01L4 BULK
0.0015	A01	4.0	9.0	13.0	12	MMK10 152K100A01L4 BULK
0.0018	A01	4.0	9.0	13.0	12	MMK10 182K100A01L4 BULK
0.0022	A01	4.0	9.0	13.0	12	MMK10 222K100A01L4 BULK
0.0027	A01	4.0	9.0	13.0	12	MMK10 272K100A01L4 BULK
0.0033	A01	4.0	9.0	13.0	12	MMK10 332K100A01L4 BULK
0.0039	A01	4.0	9.0	13.0	12	MMK10 392K100A01L4 BULK
0.0047	A01	4.0	9.0	13.0	12	MMK10 472K100A01L4 BULK
0.0056	A01	4.0	9.0	13.0	12	MMK10 562K100A01L4 BULK
0.0068	A01	4.0	9.0	13.0	12	MMK10 682K100A01L4 BULK
0.0078	A01	4.0	9.0	13.0	12	MMK10 782K100A01L4 BULK
0.0082	A01	4.0	9.0	13.0	12	MMK10 822K100A01L4 BULK
0.010	A01	4.0	9.0	13.0	12	MMK10 103K100A01L4 BULK
0.012	A01	4.0	9.0	13.0	12	MMK10 123K100A01L4 BULK
0.015	A01	4.0	9.0	13.0	12	MMK10 153K100A01L4 BULK
0.018	A01	4.0	9.0	13.0	12	MMK10 183K100A01L4 BULK
0.022	A01	4.0	9.0	13.0	12	MMK10 223K100A01L4 BULK
0.027	A01	4.0	9.0	13.0	12	MMK10 273K100A01L4 BULK
0.033	A01	4.0	9.0	13.0	12	MMK10 333K100A01L4 BULK
0.039	A01	4.0	9.0	13.0	12	MMK10 393K100A01L4 BULK
0.047	A01	4.0	9.0	13.0	12	MMK10 473K100A01L4 BULK
0.056	A01	4.0	9.0	13.0	12	MMK10 563K100A01L4 BULK
0.068	A01	4.0	9.0	13.0	12	MMK10 683K100A01L4 BULK
0.082	A01	4.0	9.0	13.0	12	MMK10 823K100A01L4 BULK
0.10	A01	4.0	9.0	13.0	12	MMK10 104K100A01L4 BULK
0.12	A01	4.0	9.0	13.0	12	MMK10 124K100A01L4 BULK
0.15	A01	4.0	9.0	13.0	12	MMK10 154K100A01L4 BULK
0.18	A01	4.0	9.0	13.0	12	MMK10 184K100A01L4 BULK
0.22	A01	4.0	9.0	13.0	12	MMK10 224K100A01L4 BULK
0.27	A01	4.0	9.0	13.0	12	MMK10 274K100A01L4 BULK
0.33	A01	4.0	9.0	13.0	12	MMK10 334K100A01L4 BULK

Capacitance µF	Box code	Max dimensions in mm			Max dU/dt V/µs	Article code
		B	H	L		
100 VDC/63 VAC						
LEAD SPACING 10 MM						
0.39	A01	4.0	9.0	13.0	12	MMK10 394K100A01L4 BULK
0.47	A01	4.0	9.0	13.0	12	MMK10 474K100A01L4 BULK
0.56	A02	4.5	10.5	13.0	12	MMK10 564K100A02L4 BULK
0.68	A02	4.5	10.5	13.0	12	MMK10 684K100A02L4 BULK
0.82	A02	4.5	10.5	13.0	12	MMK10 824K100A02L4 BULK
1.0	A04	6.0	12.0	13.0	12	MMK10 105K100A04L4 BULK

LEAD SPACING 15 MM						
0.27	B04	5.5	10.5	18.0	8	MMK15 274K100B04L4 BULK
0.33	B04	5.5	10.5	18.0	8	MMK15 334K100B04L4 BULK
0.39	B04	5.5	10.5	18.0	8	MMK15 394K100B04L4 BULK
0.47	B04	5.5	10.5	18.0	8	MMK15 474K100B04L4 BULK
0.56	B04	5.5	10.5	18.0	8	MMK15 564K100B04L4 BULK
0.68	B04	5.5	10.5	18.0	8	MMK15 684K100B04L4 BULK
0.82	B04	5.5	10.5	18.0	8	MMK15 824K100B04L4 BULK
1.0	B04	5.5	10.5	18.0	8	MMK15 105K100B04L4 BULK
1.2	B05	5.5	12.5	18.0	8	MMK15 125K100B05L4 BULK
1.5	B10	6.5	12.5	18.0	8	MMK15 155K100B10L4 BULK
1.8	B06	7.5	14.5	18.0	8	MMK15 185K100B06L4 BULK
2.2	B06	7.5	14.5	18.0	8	MMK15 225K100B06L4 BULK
2.7	B12	8.0	15.0	18.0	8	MMK15 275K100B12L4 BULK
3.3	B11	8.5	16.0	18.0	8	MMK15 335K100B11L4 BULK
3.9	B14	9.5	17.5	18.0	8	MMK15 395K100B14L4 BULK

LEAD SPACING 22.5 MM						
1.2	D13	6.5	14.5	26.0	5	MMK22.5 125K100D13L4 TRAY
1.5	D13	6.5	14.5	26.0	5	MMK22.5 155K100D13L4 TRAY
1.8	D13	6.5	14.5	26.0	5	MMK22.5 185K100D13L4 TRAY
2.0	D13	6.5	14.5	26.0	5	MMK22.5 205K100D13L4 TRAY
2.2	D13	6.5	14.5	26.0	5	MMK22.5 225K100D13L4 TRAY
2.7	D13	6.5	14.5	26.0	5	MMK22.5 275K100D13L4 TRAY
3.3	D17	7.0	16.5	26.0	5	MMK22.5 335K100D17L4 TRAY
3.9	D14	8.0	16.0	26.0	5	MMK22.5 395K100D14L4 TRAY
4.7	D15	9.0	18.5	26.0	5	MMK22.5 475K100D15L4 TRAY
5.6	D15	9.0	18.5	26.0	5	MMK22.5 565K100D15L4 TRAY
6.8	D18	10.5	19.0	26.0	5	MMK22.5 685K100D18L4 TRAY
8.2	D16	11.0	21.5	26.0	5	MMK22.5 825K100D16L4 TRAY
10.0	D20	13.5	23.0	26.0	5	MMK22.5 106K100D20L4 TRAY
12.0	D19	15.5	24.5	26.0	5	MMK22.5 126K100D19L4 TRAY
15.0	D19	15.5	24.5	26.0	5	MMK22.5 156K100D19L4 TRAY

LEAD SPACING 27.5 MM						
3.9	F11	10.5	20.5	31.5	3	MMK27.5 395K100F11L4 TRAY
4.7	F11	10.5	20.5	31.5	3	MMK27.5 475K100F11L4 TRAY
5.6	F11	10.5	20.5	31.5	3	MMK27.5 565K100F11L4 TRAY
6.8	F11	10.5	20.5	31.5	3	MMK27.5 685K100F11L4 TRAY
8.2	F11	10.5	20.5	31.5	3	MMK27.5 825K100F11L4 TRAY
10	F12	11.5	22.5	31.5	3	MMK27.5 106K100F12L4 TRAY
10	F17	21.0	12.5	31.5	3	MMK27.5 106K100F17L4 TRAY
12	F12	11.5	22.5	31.5	3	MMK27.5 126K100F12L4 TRAY
15	F13	14.5	24.5	31.5	3	MMK27.5 156K100F13L4 TRAY
18	F14	17.5	28.0	31.5	3	MMK27.5 186K100F14L4 TRAY
22	F14	17.5	28.0	31.5	3	MMK27.5 226K100F14L4 TRAY
22	F19	27.5	16.0	31.5	3	MMK27.5 226K100F19L4 TRAY
27	F15	19.0	29.0	31.5	3	MMK27.5 276K100F15L4 TRAY
27	F18	31.0	19.0	31.5	3	MMK27.5 276K100F18L4 TRAY
33	F16	21.0	30.0	31.5	3	MMK27.5 336K100F16L4 TRAY

ARTICLE TABLE

Capaci- Box Max dimen- Max
tance code sions in mm dU/dt
µF B H L V/µs Article code

Capaci- Box Max dimen- Max
tance code sions in mm dU/dt
µF B H L V/µs Article code

400 VDC/200 VAC

400 VDC/200 VAC

LEAD SPACING 10 MM

LEAD SPACING 27.5 MM

Table with 8 columns: Part No., Code, B, H, L, V/µs, Article code, Description. Rows include 0.0018 A01 4.0 9.0 13.0 30 MMK10 182K400A01L4 BULK up to 0.15 A04 6.0 12.0 13.0 30 MMK10 154K400A04L4 BULK

Table with 8 columns: Part No., Code, B, H, L, V/µs, Article code, Description. Rows include 0.68 F11 10.5 20.5 31.5 8 MMK27.5 684K400F11L4 TRAY up to 5.6 F18 31.0 19.0 31.5 8 MMK27.5 565K400F18L4 TRAY

LEAD SPACING 15 MM

LEAD SPACING 37.5 MM

Table with 8 columns: Part No., Code, B, H, L, V/µs, Article code, Description. Rows include 0.047 B04 5.5 10.5 18.0 20 MMK15 473K400B04L4 BULK up to 0.68 B14 9.5 17.5 18.0 20 MMK15 684K400B14L4 BULK

Table with 8 columns: Part No., Code, B, H, L, V/µs, Article code, Description. Rows include 1.8 R05 13.0 24.0 41.0 5 MMK37.5 185K400R05L4 TRAY up to 18 R08 28.0 43.0 41.0 5 MMK37.5 186K400R08L4 TRAY

LEAD SPACING 22.5 MM

630 VDC/220 VAC

Table with 8 columns: Part No., Code, B, H, L, V/µs, Article code, Description. Rows include 0.18 D13 6.5 14.5 26.0 10 MMK22.5 184K400D13L4 TRAY up to 2.7 D19 15.5 24.5 26.0 10 MMK22.5 275K400D19L4 TRAY

LEAD SPACING 5 MM

Table with 8 columns: Part No., Code, B, H, L, V/µs, Article code, Description. Rows include 0.0010 J01 2.5 6.5 7.2 80 MMK5 102K630J01L4 BULK up to 0.047 J06 7.2 13.0 7.2 80 MMK5 473K630J06L4 BULK

KEMET Corporation World Headquarters

2835 KEMET Way
Simpsonville, SC 29681

Mailing Address:
P.O. Box 5928
Greenville, SC 29606

www.kemet.com
Tel: 864-963-6300
Fax: 864-963-6521

Corporate Offices

Fort Lauderdale, FL
Tel: 954-766-2800

North America

Southeast

Lake Mary, FL
Tel: 407-855-8886

Northeast

Wilmington, MA
Tel: 978-658-1663

West Chester, PA
Tel: 610-692-4642

Central

Schaumburg, IL
Tel: 847-882-3590

Carmel, IN
Tel: 317-706-6742

West

Milpitas, CA
Tel: 408-433-9950

Mexico

Zapopan, Jalisco
Tel: 52-33-3123-2141

Europe

Southern Europe

Geneva, Switzerland
Tel: 41-22-715-0100

Paris, France
Tel: 33-1-4646-1009

Sasso Marconi, Italy
Tel: 39-051-939111

Milan, Italy
Tel: 39-02-57518176

Rome, Italy
Tel: 39-06-23231718

Madrid, Spain
Tel: 34-91-804-4303

Central Europe

Landsberg, Germany
Tel: 49-8191-3350800

Dortmund, Germany
Tel: 49-2307-3619672

Kwidzyn, Poland
Tel: 48-55-279-7025

Northern Europe

Bishop's Stortford, United Kingdom
Tel: 44-1279-757201

Weymouth, United Kingdom
Tel: 44-1305-830747

Coatbridge, Scotland
Tel: 44-1236-434455

Färjestaden, Sweden
Tel: 46-485-563934

Espoo, Finland
Tel: 358-9-5406-5000

Asia

Northeast Asia

Hong Kong
Tel: 852-2305-1168

Shenzhen, China
Tel: 86-755-2518-1306

Beijing, China
Tel: 86-10-5829-1711

Shanghai, China
Tel: 86-21-6447-0707

Taipei, Taiwan
Tel: 886-2-27528585

Southeast Asia

Singapore
Tel: 65-6586-1900

Penang, Malaysia
Tel: 60-4-6430200

Bangalore, India
Tel: 91-806-53-76817

Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.

Other KEMET Resources

Tools	
Resource	Location
Configure A Part: CapEdge	http://capacitoredge.kemet.com
SPICE & FIT Software	http://www.kemet.com/spice
Search Our FAQs: KnowledgeEdge	http://www.kemet.com/keask

Product Information	
Resource	Location
Products	http://www.kemet.com/products
Technical Resources (Including Soldering Techniques)	http://www.kemet.com/technicalpapers
RoHS Statement	http://www.kemet.com/rohs
Quality Documents	http://www.kemet.com/qualitydocuments

Product Request	
Resource	Location
Sample Request	http://www.kemet.com/sample
Engineering Kit Request	http://www.kemet.com/kits

Contact	
Resource	Location
Website	www.kemet.com
Contact Us	http://www.kemet.com/contact
Investor Relations	http://www.kemet.com/ir
Call Us	1-877-MyKEMET
Twitter	http://twitter.com/kemetcapacitors

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") are subject to change without notice.

All Information given herein is believed to be accurate and reliable, but is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Although we design and manufacture our products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.