

RKBPC6005 Thru RKBPC610

6 AMP FAST RECOVERY BRIDGE RECTIFIER

FEATURES


- Rating to 1000V PRV
- High efficiency
- Ideal for printed circuit board
- Surge overload rating to 125 Amperes peak
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- UL recognized: File #E106441
- UL recognized 94V-O plastic material

Mechanical Data


- Case: Molded Plastic
- Leads: Silver plated copper
- Leads solderable per MIL-STD-202, Method 208
- Weight: 0.13 ounce, 3.8 grams

Maximum Ratings & Characteristics

- Ratings at 25° C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load
- For capacitive load, derate current by 20%

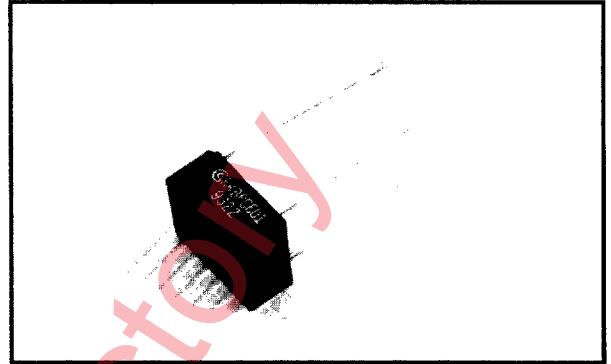

Outline Drawing

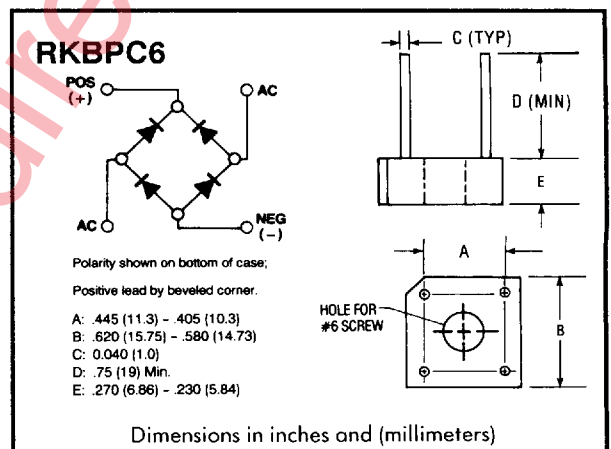

		RKBPC 6005	RKBPC 601	RKBPC 602	RKBPC 604	RKBPC 606	RKBPC 608	RKBPC 610	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Output Current	$I_{(AV)}$					8.0			A
						6.0			
Peak Forward Surge Current 8.3 ms Single Half-Sine-Wave Superimposed On Rated Load	I_{FSM}					125			A
Maximum DC Forward Voltage Drop per Element At 3.0A DC	V_F					1.3			V
Maximum Reverse Current At Rated DC Blocking Voltage per Element	I_R					10			μA
						1			mA
Maximum Recovery Time (Note 1)	t_{rr}	200			300		500		nS
$I^2 t$ Rating for Fusing ($t < 8.3ms$)	$I^2 t$					64			$A^2 S$
Operating Temperature Range	T_J					-55 to +125		$^{\circ}C$	
Storage Temperature Range	T_{STG}					-55 to +150		$^{\circ}C$	

Note: 1. Reverse Recovery test conditions: $I_F = 0.5A$, $I_R = -1.0A$, $I_{RR} = -0.25A$

* Unit mounted on metal chassis

** Unit mounted on P.C. board