

**MINIATURE
CONFORMAL COATED
POWER INDUCTOR
SERIES DD**

FEATURES

- Highest current capacity per volume
- Low price
- Compact size
- Good for auto insertion
- Available with cut & formed leads
- Available on Tape & Reel

ELECTRICAL CHARACTERISTICS

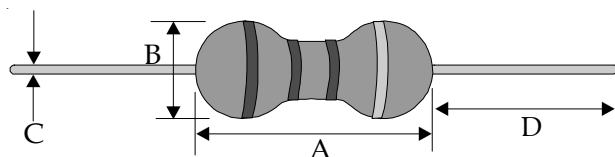
- Inductance range 1.0 μ H to 1000 μ H*
- Tolerance \pm 10% over entire range*
- Rated current Based on Lo changes within
 \pm 10% typical
- Testing procedures Inductance measured with
 Quadtech 1750 LCR Meter at
 1 KHz and with 100 mVAC

PHYSICAL CHARACTERISTICS

- Dielectric strength 500 volts RMS
- Operating temp. -55°C to +105°C
- Terminal strength 5 lbs pull test per MIL-STD-
 202E
- Resistance to solvents Conforms to MIL-STD-202
- Construction Epoxy coated
- Marking 4 Band EIA color code
- Packaging Bulk: 1000 pieces per bag
 Reel: 2500 pieces per reel

DIMENSIONS IN INCHES

- Body length A 0.395" \pm 0.03"
- Body diameter B 0.157" \pm 0.03"
- Lead wire C 22 AWG/TCW
- Lead length D 1.00" minimum

**SPECIFICATIONS**

Part Number	L (μ H)	DCR Max (Ω)	Rated Current (Amp)	Saturation Current (Amp)
DD-1R0K	1.0	0.025	4.0	7.5
DD-1R2K	1.2	0.025	4.0	7.5
DD-1R5K	1.5	0.028	4.0	7.5
DD-1R8K	1.8	0.030	4.0	7.5
DD-2R2K	2.2	0.033	4.0	6.1
DD-2R7K	2.7	0.035	4.0	5.0
DD-3R3K	3.3	0.040	3.0	4.7
DD-3R9K	3.9	0.045	3.0	4.5
DD-4R7K	4.7	0.050	3.0	4.5
DD-5R6K	5.6	0.058	3.0	4.5
DD-6R8K	6.8	0.060	3.0	3.5
DD-8R2K	8.2	0.065	2.0	3.0
DD-100K	10.0	0.085	2.0	3.0
DD-120K	12	0.09	1.0	2.5
DD-150K	15	0.10	1.0	2.5
DD-180K	18	0.12	1.0	2.0
DD-220K	22	0.15	1.0	2.0
DD-250K	25	0.15	1.0	2.0
DD-270K	27	0.17	1.0	1.7
DD-330K	33	0.19	1.0	1.5
DD-390K	39	0.21	1.0	1.5
DD-470K	47	0.23	1.0	1.3
DD-560K	56	0.38	0.6	1.2
DD-680K	68	0.42	0.6	1.2
DD-820K	82	0.45	0.6	0.85
DD-101K	100	0.80	0.6	0.80
DD-121K	120	1.10	0.50	0.70
DD-151K	150	1.10	0.50	0.70
DD-181K	180	1.25	0.40	0.65
DD-221K	220	1.30	0.40	0.60
DD-251K	250	1.45	0.40	0.56
DD-271K	270	1.95	0.30	0.50
DD-331K	330	2.10	0.30	0.50
DD-391K	390	2.25	0.30	0.42
DD-471K	470	2.50	0.20	0.36
DD-561K	560	3.10	0.20	0.35
DD-681K	680	4.60	0.20	0.31
DD-821K	820	5.25	0.15	0.30
DD-102K	1000	6.00	0.15	0.25

* NOTE: Other inductance values up to 10,000 μ H and special tolerances are available by special order.